

LED LIGHTING CATALOG



RMPAC
Electricals

rmpacgroup.com/electrical

(855) 777-6722

STRIPS LIGHTS	3
STAIRWELL LIGHT	3
HIGHBAYS	4
WRAPS	6
UNDERCABINET	6
LED REPLACEMENT TUBES	7
VAPORTIGHT	8
CENTER BASKETS AND PANEL LIGHTS	9
ARCHITECTURAL RECESSED LIGHTS	10
LED RECESSED TRIMS & CANS	11
RETROFIT FLAT PANEL RECESSED LIGHTS	13
SURFACE MOUNTS	13
MULTI-PURPOSE AREA LIGHTS	15
BOLLARDS	15
WALL PACKS	16
CANOPY LIGHT	17
DUSK-TO-DAWN	17
EXIT SIGN & EMERGENCY LIGHTING & COMBOS	18
EMERGENCY POWER SYSTEMS	20
SENSORS & DIMMERS	21
SWITCHES & RECEPTACLES	22
WIRE CONNECTORS / CABLE TIES / GOOF RINGS	23
CORDS / PLUGS / WHIPS	23

INDOOR

OUTDOOR

LIFE SAFETY ACCESSORIES



STRIP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensor
- L70 = 196,000 hours
- Emergency drivers available




Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-SL-4FT-5L-LKFS	5,203 lumens	34	152 lm/W	3500K/4000K/5000K	47.3"	3.3"	3.5"
	4,317 lumens	30	143 lm/W				
	3,631 lumens	25	143 lm/W				
EFS-SL-8FT-10L-LKFS	10,124 lumens	68	149 lm/W	3500K/4000K/5000K	94.2"	3.3"	3.5"
	8,483 lumens	60	141 lm/W				
	7,135 lumens	55	130 lm/W				




STRIP LIGHT SLIM

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensors
- L70 = 196,000 hours
- Emergency drivers available

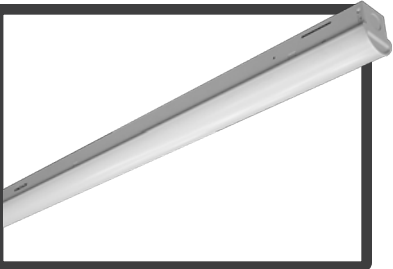

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-SLS-4FT-5L-LKFS	5,025 lumens	33	151 lm/W	3500K/4000K/5000K	47.3"	2.4"	2.8"
	4,305 lumens	30	143 lm/W				
	3,622 lumens	25	143 lm/W				
EFS-SLS-8FT-10L-LKFS	9,976 lumens	67	149 lm/W	3500K/4000K/5000K	94.2"	2.4"	2.8"
	8,862 lumens	58	152 lm/W				
	7,567 lumens	48	156 lm/W				

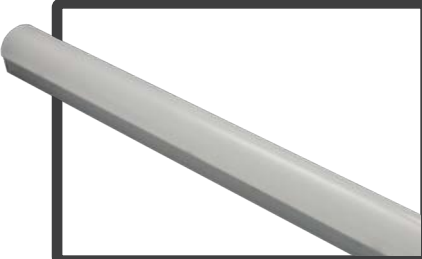

STAIRWELL LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Optional occupancy/dimming sensor
- L70 = 190,000 hours
- Emergency drivers available
- Field selectable output and color temperature



Product Number	Selectable Lumen Output*	Watts*	Efficacy	Selectable CCT*	Length (in)	Width (in)	Height (in)
EFS-SW-LKFS	6,499 lumens	45	146 lm/W	3500K/4000K/5000K	48"	4.5"	4"
	4,941 lumens	33	150 lm/W				
	4,311 lumens	28	152 lm/W				

* Nominal values shown for CCT set at 4000K



PREMIUM ROUND HIGH BAY

- Universal voltage 120-277V; optional 347-480V
- Power factor >0.90
- 0-10Vdc dimming
- Field selectable output and color temperature
- Sensor Ready- screw in receptacle
- Optional Passive Infrared photocell (PIR) or Microwave sensor sold separately
- L70 = 146,000 hours
- Available in black or white



Accessories Sold Separately
EFS-HD07VR-PH-1 = Passive Infrared Sensor
EFS-HD07VR-MH-B-1 = Microwave step-dimming sensor
EFS-HBSD-325W-480-277 = 347-480V step-down transformer
EFS-HBRSR-ALREF-S = 90° aluminum reflector - 07-HBRSR-221816L-4K5K models
EFS-HBRSR-PCREF-S = 90° polycarbonate reflector - 07-HBRSR-221816L-4K5K models
EFS-HBRSR-ALREF-L = 90° aluminum reflector - 07-HBRSR-353024L-4K5K models
EFS-HBRSR-PCREF-L = 90° polycarbonate reflector - 07-HBRSR-353024L-4K5K models
EFS-HBRSR-YOKE-WHT = Yoke mount - all models - white
EFS-HBRSR-YOKE-BLK = Yoke mount - all models - black
EFS-LEDHBSRN-PSH-PRM-V2 = Pendant snap hook - all models

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Diameter (in)	Height (in)
EFS-HBRSR-221816L-LKFS	22,935 lumens	147	156 lm/W	4000K/5000K	10.6"	5.5"
	18,790 lumens	115	163 lm/W			
	15,891 lumens	95	168 lm/W			
EFS-HBRSR-353024L-LKFS	35,716 lumens	229	156 lm/W	4000K/5000K	13"	5.6"
	30,801 lumens	192	160 lm/W			
	24,368 lumens	146	167 lm/W			



FULL BODY HIGH BAY

- Universal voltage 120-277V; optional 347-480V
- Power factor >0.90
- Screw-in sensor ready
- 0-10Vdc dimming
- Lumen and Kelvin selectable
- L70 = 135,000 hours
- Chain mounting kit is standard, other mounting options are available



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
EFS-FHBSR-181512L-LKFS	18,260 lumens	127	143 lm/W	4000K/5000K	13"	9.5"	3.7"
	15,387 lumens	104	148 lm/W				
	12,454 lumens	82	153 lm/W				
EFS-FHBSR-241815L-LKFS	23,772 lumens	150	150 lm/W	4000K/5000K	14.2"	10.25"	4.5"
	18,164 lumens	116	156 lm/W				
	15,480 lumens	98	159 lm/W				
EFS-FHBSR-363024L-LKFS	35,415 lumens	235	150 lm/W	4000K/5000K	19.7"	10.25"	6.5"
	29,825 lumens	192	155 lm/W				
	24,204 lumens	151	130 lm/W				
EFS-FHBSR-604836-LKFS	69,117 lumens	390	152 lm/W	4000K/5000K	30.7"	11"	9.25"
	47,698 lumens	305	156 lm/W				
	36,167 lumens	225	161 lm/W				

* Nominal values shown for CCT set at 4000K



PREMIUM LINEAR HIGH BAY

- Universal voltage 120-277V; optional 347-480V
- Power factor >0.90
- Sensor ready
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional occupancy sensor
- L70 = 134,000 hours
- Emergency drivers available
- Optional narrow or wide distribution



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-HBLSR-181512L-LKFS	18,085 lumens	120	150 lm/W	4000K/5000K	16.5"	10.25"	1.8"
	14,555 lumens	96	152 lm/W				
	12,007 lumens	76	158 lm/W				
EFS-HBLSR-241815L-LKFS	24,047 lumens	158	152 lm/W	4000K/5000K	23"	10.25"	1.8"
	18,017 lumens	115	157 lm/W				
	15,021 lumens	94	159 lm/W				
EFS-HBLSR-363024L-LKFS	35,517 lumens	237	150 lm/W	4000K/5000K	31"	10.25"	1.8"
	30,037 lumens	193	156 lm/W				
	24,049 lumens	152	158 lm/W				
EFS-HBLSR-604836L-LKFS	60,104 lumens	404	149 lm/W	4000K/5000K	44"	10.25"	1.8"
	48,182 lumens	312	154 lm/W				
	37,049 lumens	236	157 lm/W				



ADJUSTABLE HIGH BAY

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Optional Passive Infrared or microwave sensor
- L70 = 148,000 hours
- Optic panels rotate up to 135 degrees



Accessories Sold Separately

EFS-HBLASR-WGK-24X4	Wire-guard kit – 15L & 23L
EFS-HBLASR-WGK-24X5	Wire-guard kit – 30L
EFS-LEDHB-PMK-S	Pendant mount kit – all models
EFS-LEDHB-SMK-S	Surface mount kit – all models

Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
EFS-HBLASR-15129L-LKFS	15,819 lumens	107	140 lm/W	4000K/5000K	25.8"	12.1"	2"
	12,681 lumens	83	140 lm/W				
	9,935 lumens	64	140 lm/W				
EFS-HBLASR-242815L-LKFS	33,645 lumens	157	142 lm/W	4000K/5000K	25.8"	12.1"	2"
	17,959 lumens	115	140 lm/W				
	15,038 lumens	95	140 lm/W				
EFS-HBLASR-302418L-LKFS	31,090 lumens	205	140 lm/W	4000K/5000K	25.8"	12.1"	2"
	25,457 lumens	163	140 lm/W				
	19,469 lumens	121	140 lm/W				

* Nominal values shown for CCT set at 4000K



ECONOMY WRAP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- L70 = 196,000 hours



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-WRE-6L-LKFS	5,880 lumens 5,017 lumens 3,925 lumens	45 40 30	131 lm/W 129 lm/W 131 lm/W	3500K/4000K/5000K	47.6"	5.4"	2"




ECONOMY UNDER CABINET LIGHT

- Standard 120Vac input
- Power factor >0.90
- CRI >90
- Triac dimming
- Field selectable color temperature
- L70 = 196,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-UCE-9-KFS	412	5	86 lm/W	27K/30K/35K/40K/50K	9"	3.5"	1"
EFS-UCE-12-KFS	450	5	92 lm/W	27K/30K/35K/40K/50K	12"	3.5"	1"
EFS-UCE-18-KFS	770	9	88 lm/W	27K/30K/35K/40K/50K	18"	3.5"	1"
EFS-UCE-21-KFS	764	9	90 lm/W	27K/30K/35K/40K/50K	21"	3.5"	1"
EFS-UCE-24-KFS	803	9	91 lm/W	27K/30K/35K/40K/50K	24"	3.5"	1"
EFS-UCE-33-KFS	1,245	14	91 lm/W	27K/30K/35K/40K/50K	33"	3.5"	1"
EFS-UCE-42-KFS	1,543	18	88 lm/W	27K/30K/35K/40K/50K	42"	3.5"	1"

* Nominal values shown for CCT set at 4000K

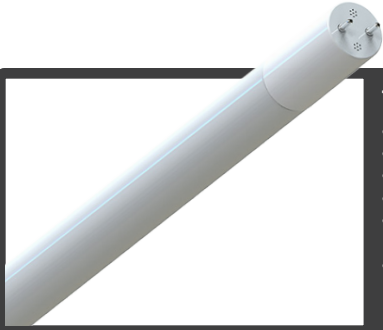

T8 LED REPLACEMENT LAMPS

- Universal voltage 120-277V
- Non-dimming
- CRI>80
- L70 = 54,000 hours
- 02-T8L-7X (8-ft) Series- Double-ended, integrated driver, Type B for bypass only
- 4-ft lamp Series- Single or double-ended, integrated driver, Type B for bypass only



Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
EFS-T8LIDFH11-2200-4FT-CBA-7T	2,200 lumens	17	130 lm/W	4000K	47.2"	1"	1"
EFS-T8LIDFH11-2200-4FT-EBA-7T	2,200 lumens	17	130 lm/W	5000K	47.2"	1"	1"
EFS-T8LIDFH11-5000-8FT-EBA-7X	5,500 lumens	40	138 lm/W	5000K	93.2"	1"	1"
EFS-L8L1-BPMFH-G2-17W-A8TSE2200-4C	2,100 lumens*	17*	124 lm/W*	Selectable 27 / 30 / 35 / 40 / 50 / 6000K	47.2"	1"	1"



T5 LED REPLACEMENT LAMPS

- Universal 120-277V ac input
- Non-dimming
- L70 = 54,000 hours
- CRI>80
- Double-ended, integrated driver, Type B for bypass only



Product Number	Lumen Output	Watts	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-T5L-ISFH14-3500-4FT-EBA-01	3,500 Lumens	25	140 Lm/W	5000	45.2"	0.7"	0.7"



PREMIUM WRAP LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- 0-10Vdc dimming
- Field selectable output and color temperature
- Optional passive infrared (PIR) or microwave sensor
- L70 = 196,000 hours
- Emergency drivers available



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-WR-5L-LKFS	5,837 lumens 4,932 lumens 4,336 lumens	39 32 28	149 lm/W 152 lm/W 154 lm/W	3500K/4000K/5000K	47.7"	7.1"	2.8"

* Nominal values shown for CCT set at 4000K



VAPOR-TIGHT LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 137,000 hours
- Field Selectable Color Temperature
- ETL Sanitation listed for non-splash food zones to comply with NSF/ANSI 2 standards
- NEMA 4x



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-VT-6L-KFS	6,256 lumens	42	148 lm/W	3500K/4000K/5000K	45.7"	4.7"	4.3"
EFS-VT-14L-KFS	14,327 lumens	93	156 lm/W	3500K/4000K/5000K	50"	10"	4.1"
EFS-VT-20L-KFS	21,447 lumens	140	152 lm/W	3500K/4000K/5000K	50"	10"	4.1"



CENTER BASKET

- Universal voltage 120-277V
- Power factor >0.90
- Field selectable output and color temperature
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 196,000 hours
- Emergency drivers available



Mounting Accessories and Emergency Drivers (Sold Separately)	
10-SMKT-22	Surface Mount Kit for 2x2 panel
10-SMKT-24	Surface Mount Kit for 2x4 panel
10-FLANGEKIT22-ET	Flange Mounting Kit for 2x2 panel
10-FLANGEKIT24-ET	Flange Mount Kit for 2x4 Panel
10-PNL-CM	Cable Mounting Kit
03-BLEM-CP-5C	Remote Mount Emergency driver - EM5
03-BLEM-CP-10C	Remote Mount Emergency driver - EM10
03-BLEM-CP-13C	Remote Mount Emergency driver - EM13

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-CB22-4L-LKFS	4,370 lumens	31	140 lm/W	3500K/4000K/5000K	23.7"	23.7"	2"
	3,772 lumens	27	142 lm/W				
	3,176 lumens	22	144 lm/W				
EFS-CB24-6L-LKFS	5,858 lumens	43	137 lm/W	3500K/4000K/5000K	47.8"	23.7"	2"
	5,062 lumens	36	139 lm/W				
	4,556 lumens	32	141 lm/W				




VAPOR-TIGHT SLIM LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 187,000 hours
- Emergency Drivers available
- Field Selectable output and color temperature
- Optional occupancy sensor



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-VTS-7L-LKFS	7,611 lumens	51	149 lm/W	3500K/4000K/5000K	47"	3.8"	3"
	6,198 lumens	43	144 lm/W				
	5,303 lumens	36	146 lm/W				

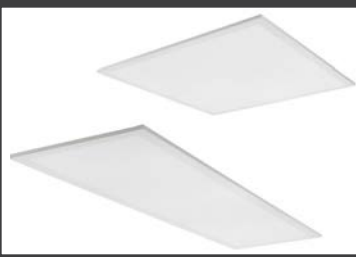

PANEL LIGHTS

- Universal voltage 120-277V
- Power factor >0.90
- Field selectable output and color temperature
- CRI >80
- 0-10Vdc dimming
- PMMA lens
- L70 = 144,000 hours
- Emergency drivers available
- Flicker-Free per IEEE1789-2015



Mounting Accessories (Sold Separately)	
EFS-SMKT-14	Surface Mount Kit for 1x4 panel
EFS-SMKT-22	Surface Mount Kit for 2x2 panel
EFS-SMKT-24	Surface Mount Kit for 2x4 panel
EFS-FLANGEKIT14-ET	Flange mount kit for 1x4 panel
EFS-FLANGEKIT22-ET	Flange Mount Kit for 2x2 panel
EFS-FLANGEKIT24-ET	Flange Mount Kit for 2x4 Panel
EFS-PNL-CM	Cable Mounting Kit

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-PNL1X4-40L-LKFS	4,300 lumens	33	131 lm/W	3500K/4000K/5000K	47.7"	11.8"	1.5"
	3,700 lumens	27	137 lm/W				
	2,730 lumens	19	140 lm/W				
EFS-PNL2X2-40L-LKFS	4,290 lumens	32	135 lm/W	3500K/4000K/5000K	23.7"	23.7"	1.5"
	3,810 lumens	27	142 lm/W				
	2,800 lumens	19	145 lm/W				
EFS-PNL2X4-50L-LKFS	5,250 lumens	37	141 lm/W	3500K/4000K/5000K	47.7"	23.7"	1.5"
	4,575 lumens	32	144 lm/W				
	3,323 lumens	23	148 lm/W				



ARCHITECTURAL LED RECESSED DOWNLIGHTS & FRAME KITS

- Universal 120-277V
- 0-10V Dimming
- CRI>80
- New Construction or Remodel application
- Architectural frames with C channel and flat hanger bars (ordered separately) for tie-down to ceiling grids. ZZ-BARHANGER-ARCHCAN-FLAT27"



Trim Part	Frame Kit Part	Lumen Output	Watts	Efficacy	Available CCT	Aperature
EFS-4T-LED-ARC-21W-3K	06-4C-LED-ARC-FRAME21	1590 lumens	21	76 lm/W	3000 Kelvin	4"
EFS-4T-LED-ARC-28W-4K	06-4C-LED-ARC-FRAME28	1940 Lumens	28	70 lm/W	4000 Kelvin	4"
EFS-6T-LED-ARC-28W-3K	06-6C-LED-ARC-FRAME28	2210 Lumens	28	79 lm/W	3000 Kelvin	6"
EFS-6T-LED-ARC-48W-4K	06-6C-LED-ARC-FRAME48	3770 Lumens	48	79 lm/W	4000 Kelvin	6"
EFS-8T-LED-ARC-40W-4K	06-8C-LED-ARC-FRAME40	3090 Lumens	40	77 lm/W	4000 Kelvin	8"
EFS-8T-LED-ARC-52W-4K	06-8C-LED-ARD-FRAME52	4530 Lumens	52	87 lm/w	4000 Kelvin	8"



ARCHITECTURAL LED DOWNLIGHT

- Universal Voltage 120-277V
- Field selectable output and color temperature
- 0-10Vdc dimming
- Power factor >0.90
- L70 = 149,000 hours
- IC rated
- New construction or retrofit applications



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-CDR4-1L-LKFS-WHT (White Baffle)	1,000 lumens 800 lumens 500 lumens	12 9 6	83 lm/W 89 lm/W 83 lm/W	2700K/3000K/4000K/5000K	5.1"	5.1"	3.2"
EFS-CDR4-1L-LKFS-SW (Specular White)	1,000 lumens 800 lumens 500 lumens	12 9 6	83 lm/W 89 lm/W 83 lm/W	2700K/3000K/4000K/5000K	5.1"	5.1"	3.2"
EFS-CDR6-2L-LKFS-WHT	2,000 lumens 1,500 lumens 1,000 lumens	20 15 10	100 lm/W	2700K/3000K/4000K/5000K	8.4"	8.4"	4.2"
EFS-CDR6-2L-LKFS-SW	1,600 lumens 1,200 lumens 900 lumens	20 15 10	100 lm/W	2700K/3000K/4000K/5000K	8.4"	8.4"	4.2"
EFS-CDR8-5L-LKFS-WHT	5,000 lumens 4,000 lumens 3,000 lumens	50 40 30	100 lm/W	2700K/3000K/4000K/5000K	10"	10"	4.5"

* Nominal values shown for CCT set at 4000K



2" CANS AND TRIMS

- Dedicated 120ac input
- IC Rated
- Triac dimming with most line voltage dimmers
- CRI>90
- L70 = 50,000 hours



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Available CCT	Length (in)	Width (in)	Height (in)
EFS-2T-LED-BW-SQ	Square White Baffle Trim	600 lumens	9	67 lm/W	3000K/4000K	3.125"	3.125"	2.625"
EFS-2T-LED-GRW-SQ	Square White Adjustable Gimbal Trim	600 lumens	9	67 lm/W	3000K/4000K	3.125"	3.125"	1.75"
EFS-2T-LED-BW	Round White Baffle Trim	600 lumens	9	67 lm/W	3000K/4000K	3.125"	3.125"	2.75"

2" Dedicated LED IC Rated Recessed Cans

New Construction Can	Remodel Can
EFS-2C-LEDNIC-AT-N	EFS-2C-LEDRL-IC



3" CANS AND TRIMS

- Dedicated 120ac input
- IC Rated
- Triac dimming with most line voltage dimmers
- CRI>90
- L70 = 50,000 hours
- E26 Edison Adapter for retrofit applications included



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Available CCT	Length (in)	Width (in)	Height (in)
EFS-3BRKT-BW	Round White Baffle Trim	560 lumens	9	62 lm/W	3000K/4000K	4.375"	4.375"	2.75"



3" Dedicated LED IC Rated Recessed Cans	
New Construction Can	Remodel Can
EFS-3C-LEDNIC-AT-N	EFS-3C-LEDRL-IC

* Nominal values shown for CCT set at 4000K



4" CANS AND TRIMS

- Standard 120Vac input
- IC Rated
- Triac dimming
- CRI>90
- L70 = 119,000 hours
- E26 Edison Adapter for retrofit applications included
- Selectable color temperature



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-MODR4-7L-KFS	Round White Baffle Trim	700 lumens	10	70 lm/W	27/30/35/40/50 Kelvin	5.1"	5.1"	2.3"

4" Dedicated LED IC Rated Recessed Cans	
New Construction Can	Remodel Can
EFS-4C-LED-NIC-NND	EFS-4C-LED-RIC-NND



6" CANS AND TRIMS

- Standard 120Vac input
- IC Rated
- Triac dimming
- CRI>90
- L70 = 119,000 hours
- E26 Edison Adapter for retrofit applications included
- Selectable color temperature



Trim Part	Description	Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-MODR6-10L-KFS	Round White Baffle Trim	1000 lumens	14	71 lm/W	27/30/35/40/50 Kelvin	7.4"	7.4"	2.4"




6" Dedicated LED IC Rated Recessed Cans	
New Construction Can	Remodel Can
EFS-6C-LED-NIC-NND	06-6C-LED-RIC-NND

* Nominal values shown for CCT set at 4000K



6" Sloped Ceiling IC Rated Recessed Cans	
New Construction Can	Remodel Can
EFS-6C-SLPN-ICHT	EFS-6C-SLPR-ICHT

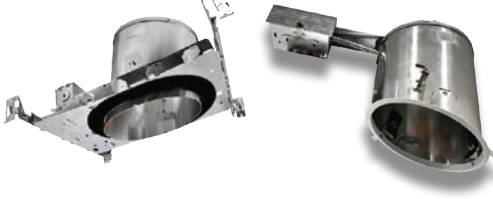

6" SLOPED INCANDESCENT RECESSED CANS & TRIMS

- Adjustable socket
- For pitched ceilings 10-30 degrees
- Accommodates up to 75W R30/PAR30 Incandescent lamps
- Thermal protection
- IC Rated



Trim Part	Description	Lamping	Trim Color	Baffle Color
EFS-6T-SLP-BW	Sloped White Baffle Trim	E26 PAR30/R30 up to 75W	White	White
EFS-6T-SLP-BB	Sloped Black Baffle Trim	E26 PAR30/R30 up to 75W	White	Black



FLAT PANEL LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 181,000 hours (4-inch); L70 = 173,000 hours (6-inch)



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
EFS-FPR4-6L-KFS	600 lumens	7	85 lm/W	2700K/3000K/3500/4000K/5000K	4.7"	4.7"	0.8"
EFS-FPR6-10L-KFS	1,000 lumens	15	66 lm/W	2700K/3000K/3500/4000K/5000K	6.7"	6.7"	0.8"



SURFACE MOUNT DOWNLIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 119,000 hours
- Trim colors available: White, Nickel, Black
- Glass lens



Product Number	Housing Color	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
EFS-DL9-11L-KFS	White Brushed Nickel Bronze	1,100 lumens	18	61 lm/W	2700K/3000K/3500K/4000K/5000K	9"	9"	2"

* Nominal values shown for CCT set at 4000K

INDOOR PRODUCTS

OUTDOOR PRODUCTS



SURFACE MOUNT LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Field selectable color temperature
- CRI >80
- Triac Dimming
- Polycarbonate lens
- L70 = 157,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
EFS-SMR11-KFS	1,000 lumens	14	71 lm/W	2700K/3000K/3500K/4000K5000K	11"	11"	3"
EFS-SMR14-KFS	1,400 lumens	20	70 lm/W	2700K/3000K/3500K/4000K5000K	14"	14"	3"
EFS-SMS12-KFS	1,000 lumens	14	71 lm/W	2700K/3000K/3500K/4000K5000K	12"	12"	3"
EFS-SMS14-KFS	1,500 lumens	20	75 lm/W	2700K/3000K/3500K/4000K5000K	14"	14"	3"



DOUBLE-RING SURFACE-MOUNT LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Field selectable color temperature
- CRI >90
- Triac dimming
- Polystyrene lens
- L70 = 93,000 hours
- Brushed nickel ring color



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
EFS-DR10-KFS	1,000 lumens	15	67 lm/W	2700K/3000K/3500K/4000K5000K	10"	10"	3"
EFS-DR14-KFS	1,800 lumens	20	90 lm/W	2700K/3000K/3500K/4000K5000K	14"	14"	4"
EFS-DR18-KFS	2,000 lumens	20	100 lm/W	2700K/3000K/3500K/4000K5000K	18"	18"	4.5"



DISK LIGHT

- Dedicated 120V (60Hz)
- Power factor >0.90
- Triac dimming
- Field selectable color temperature
- L70 = 119,000 hours



Product Number	Lumen Output*	Watts*	Efficacy*	Selectable 5CCT	Length (in)	Width (in)	Height (in)
EFS-DK6-10L-KFS	1,000 lumens	15	66 lm/W	2700K/3000K/3500K/4000K/5000K	7.2"	7.2"	1.4"

* Nominal values shown for CCT set at 4000K



MULTI-PURPOSE AREA LIGHT PRO

- Field selectable output and color temperature
- Distribution Type III or Type V
- Universal voltage 120-277V or 277-480V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- Optional NEMA photocell
- L70 = 162,000 hours



Mounting Accessories (Sold Separately)

EFS-MPAL-ARM	Arm Mount
EFS-MPAL-ARM-A	Adjustable Arm
EFS-MPAL-SF	Slip-fitter
EFS-MPAL-TM	Trunnion
EFS-MPALPRO-YOKE	Yoke

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-MPALPRO-24L-LKFS	26,600 lumens	178	150 lm/W	3000K/4000K/5000K	17"	12"	4"
	22,824 lumens	146	156 lm/W				
	16,173 lumens	100	162 lm/W				
EFS-MPALPRO-40L-LKFS	44,173 lumens	284	156 lm/w	3000K/4000K/5000K	23.5"	12"	4"
	37,248 lumens	232	160 lm/W				
	32,211 lumens	198	163 lm/W				



MULTI-PURPOSE AREA LIGHT

- Field selectable color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 149,000 hours.



Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-MPAL-2L-KFS	2,180 lumens	15	145 lm/W	3500K/4000K/5000K	4.3"	1.7"	5.8"
EFS-MPAL-4L-KFS	4,695 lumens	30	155 lm/w	3500K/4000K/5000K	8.7"	1.9"	9"
EFS-MPAL-7L-KFS	7,170 lumens	49	147 lm/W	3500K/4000K/5000K	8.7"	1.9"	9"



BOLLARD LIGHTS

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10v dimming
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours.
- Black and Bronze housing colors available.



Mounting

EFS-BOL-R-MTGKIT	Anchor Bolt for Round Bollard
EFS-BOL-S-MTGKIT	Anchor Bolt for Round Bollard

Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-BOL-R-3L-LKFS	3,244 lumens	22	145 lm/W	3000K/4000K/5000K	6"	6"	42"
	2,686 lumens	19	145 lm/W				
	1,974 lumens	14	144 lm/W				
EFS-BOL-S-3L-LKFS	3,047 lumens	23	135 lm/w	3000K/4000K/5000K	6"	6"	42"
	2,450 lumens	18	135 lm/W				
	1,790 lumens	14	130 lm/W				
EFS-BOL-RD-3L-LKFS	3,249 lumens	22	145 lm/W	3000K/4000K/5000K	6"	6"	44"
	2,530 lumens	17	145 lm/W				
	1,818 lumens	12	150 lm/W				
EFS-BOL-RDL-2L-LKFS	1,692 lumens	22	75 lm/W	3000K/4000K/5000K	6"	6"	44"
	1,351 lumens	17	80 lm/W				
	973 lumens	12	80 lm/W				

*Nominal values shown for CCT set at 4000K



TRADITIONAL WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >70
- Glass lens
- L70 = 130,000 hours







Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-WPT-7L-LKFS	7,290 lumens 5,853 lumens 4,668 lumens	49 38 29	149 lm/W 150 lm/W 151 lm/W	3000K/4000K/5000K	14"	9"	5"
EFS-WPT-10L-LKFS	10,652 lumens 8,785 lumens 6,741 lumens	74 57 42	144 lm/W 154 lm/W 159 lm/W	3000K/4000K/5000K	14"	9"	5"
EFS-WPT-15L-LKFS	15,552 lumens 13,506 lumens 10,548 lumens	110 91 69	141 lm/W 149 lm/W 153 lm/W	3000K/4000K/5000K	14"	9"	5"



ADJUSTABLE WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 146,000 hours







Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-WPA-5L-LKFS	5,084 lumens 3,842 lumens 3,002 lumens	34 25 20	151 lm/W 151 lm/W 154 lm/W	3000K/4000K/5000K	6.5"	4"	8"
EFS-WPA-10L-LKFS	10,734 lumens 9,032 lumens 7,028 lumens	71 59 45	150 lm/w 153 lm/W 157 lm/W	3000K/4000K/5000K	8.5"	5"	11"



ECONOMY/SMALL WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 156,000 hours







Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-WPE-3L-LKFS	3,327 lumens 2,709 lumens 2,090 lumens	24 19 14	140 lm/W 143 lm/W 145 lm/W	3000K/4000K/5000K	9"	6"	2.5"



FULL CUT-OFF WALL PACK

- Field selectable output and color temperature
- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- Polycarbonate lens
- L70 = 136,000 hours







Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-WPFC-8L-LKFS	8,682 lumens 7,048 lumens 5,526 lumens	57 46 35	152 lm/W 156 lm/W 161 lm/W	3000K/4000K/5000K	14"	9"	6"
EFS-WPFC-15L-LKFS	16,848 lumens 13,760 lumens 10,987 lumens	113 92 71	149 lm/w 154 lm/W 159 lm/W	3000K/4000K/5000K	14"	9"	6"



CANOPY LIGHT

- Field selectable output and color temperature
- Universal voltage 120-277V
- 0-10Vdc dimming
- Power factor >0.90
- CRI >80
- Optional factory installed microwave and dimming sensors
- L70 = 149,000 hours
- Available in White or Bronze finish







Product Number	Selectable Lumen Output*	Watts*	Efficacy*	Selectable CCT	Length (in)	Width (in)	Height (in)
EFS-CP-10L-LKFS	10,500 lumens 8,250 lumens 6,950 lumens	69 51 43	150 lm/W 160 lm/W 165 lm/W	3000K/4000K/5000K	10.5"	9.6"	3.4" (with sensor)



DUSK-TO-DAWN LIGHT

- Universal voltage 120-277V
- Power factor >0.90
- CRI >80
- L70 = 163,000 hours
- NEMA photocell standard
- Polycarbonate lens







Product Number	Lumen Output	Watts	Efficacy	CCT	Length (in)	Width (in)	Height (in)
EFS-DDAL-5L-5K-PC	4,900 lumens	37	133 lm/W	5000K	10"	7"	6"



LED LIGHTPIPE EXIT COMBO

- Dual 120/277 voltage
- Premium, injection-molded thermoplastic
- 4.8V long life, rechargeable NiCd battery
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	Letter Color	Housing Color	Options
EFS-CLP	Single Double Universal Single/ Double	Red Green	White Black	Self-Diagnostic Custom Wording



EDGE-LIT EXIT SIGN

- Dual 120/277 voltage
- Premium, extruded aluminum housing
- Internal automatic switching to emergency battery mode
- Mounting canopy for top, end or back mounting
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	Letter Color	Panel Color	Housing Color	Battery	Options
EFS-XEU	Single Double	Red Green	Clear Mirror White	White Black Aluminum	AC-Only EM-Battery Back-up	Self-Diagnostic Dual Circuit (120V or 277V) Special Wording Assembled in USA



SLIM PROFILE THERMOPLASTIC EXIT SIGN

- Dual 120/277 voltage
- Red/Green Selectable available
- Engineering grade, 5VA flame retardant Thermoplastic
- Internal automatic switching to emergency battery mode
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	LED /Letter Color	Housing Color	Battery	Options	Housing Style
EFS-EZR	Red Green Red/Green Selectable	White Black	AC-Only EM-Battery Back-up	Self-Diagnostic Dual Circuit Custom Wording Assembled in USA	SL- Low Profile

TWO-HEAD THERMOPLASTIC COMBO UNIT

- Standard 120Vac input
- Dual 120/277 voltage
- Red/Green Selectable available
- 1.5-watt (3 LEDs x 0.50 watt) per head;
- 3.6V Long-life rechargeable NiCad battery;
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Mounting Canopy for top or side mounting or Universal KO for wall mount
- Meets UL924, NFPA 101 Life Safety code



Product Number	No. of Faces	LED /Letter Color	Housing Color	Options
EFS-CEM	Universal Single/Double	Red Green RED/GREEN Selectable	White Black	Remote Capacity Self-Diagnostic Assembled in USA



REDUCED PROFILE ADJUSTABLE TWO-HEAD EMERGENCY UNIT

- Dual 120/277 voltage
- 1.5-watt (3 LEDs x 0.50 watt) per head;
- 3.6V Long-life rechargeable NiCad battery;
- Internal automatic switching to emergency battery mode
- Engineering grade, 5VA flame retardant Thermoplastic
- Meets UL924, NFPA 101 Life Safety code



Product Number	Housing Color	Options
EFS-EM	White Black	Self-Diagnostic Remote Capacity



DECORATIVE OUTDOOR AC EMERGENCY UNIT

- 4.8V long life, rechargeable NiCad Battery
- Automatic Emergency on switch
- 90 minutes illumination
- Self-Diagnostic monthly, bi-annual and annual testing
- Photocell standard
- Optional internal heater for extreme cold weather
- CEC Title 20 certified optional
- Meets UL924, NFPA 101 Life Safety code



Product Number	Housing Color	Voltage	Wattage	Output (Lumens)
EFS-ETD-ACEM	White Black Dark Bronze Nickel	Universal 120- 277V	12W	1,286 (AC mode) 350 (DC mode)



MICRO/MINI/LARGE INVERTER
EMERGENCY POWER SYSTEM

Electrical inverter systems for powering up to 1150W of incandescent, fluorescent, induction or LED lighting loads. Pulse width modulated (PWM) output design provides clean, 60 Hz, sinusoidal emergency power to loads.




Product Number	Capacity	Mounting	Options
EFS-MPS	20 Watts 32 Watts 35 Watts 55 Watts	Surface Recessed Ceiling T-Grid	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel
EFS-PINV	55 Watts/125VA 110 Watts/125VA 110Watts/250VA 220Watts/250VA	Surface Recessed Ceiling T-Grid	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel 4C- 4-output Circuit Switching AO-Adjustable Output/Dimmer Bypass
EFS-LPS	375 Watts 600 Watts 750 Watts 950 Watts 1150 Watts	Surface	Self-Diagnostics CEC-Title 20 Compliant Remote Test Switch Panel 4C- 4-output Circuit Switching 4AO-Adjustable Output/Dimmer Bypass Input Circuit Breaker Output Circuit Breaker



EMERGENCY DRIVER FOR LED LAMPS

Our dependable emergency driver provides regulated power to LED lamps during a power outage. Our emergency driver has versatile mounting options: inside, on-top or remote mount. Includes a push to test indicator standard.

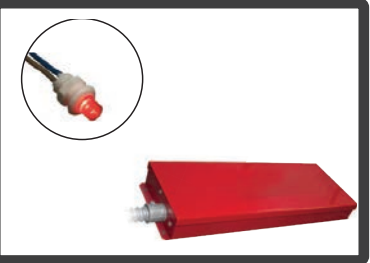

Product Number	Output Voltage	Output Wattage
EFS-LEDEM-BP/DM-20W-E	180VDC	20 Watts



MICRO/MINI/LARGE INVERTER
EMERGENCY POWER SYSTEM

Electrical inverter systems for powering up to 1150W of incandescent, fluorescent, induction or LED lighting loads. Pulse width modulated (PWM) output design provides clean, 60 Hz, sinusoidal emergency power to loads.



Product Number	Current (mA)	Output Voltage (VDC)	Output Wattage (W)	Lumens (Lm)
EFS-LEDEM-CP-1200	390-156	20-50	7.8	1200
EFS-LEDEM-CP-2400	850-340	20-50	17.0	2400

Product Number	Current (mA)	Output Voltage (VDC)	Output Wattage (W)	Options
EFS-BLEM-CP-5	250-100	20-50	5	-C = Provided with 2' flex conduit on each end
EFS-BLEM-CP-10	535-214	20-50	10.7	
EFS-BLEM-CP-13	685-274	20-50	13.7	



MICRO-WAVE OR DAYLIGHT
HARVESTING / OCCUPANCY SENSOR

EFS-HD406VRH-D

- Multi-volt: 120-277V
- Rated up to 3A @120V
- Operating Temperature of -35°C to 60°C
- Mounts up to 49ft
- Requires remote to adjust factory settings (HD03R)



360° HIGH BAY OCC SENSOR

EFS-FL-OSFHU-RG

- Passive Infrared Technology:
- Turn lights ON in response to the heat generated energy
- Mounts directly onto a luminaire
- Operational Mode: Auto ON, Auto OFF
- Time Delay: Adjustable (15 seconds up to 30 minutes)
- Coverage Range: High Bay mounting heights up to 25' mounting / 360° field
- 120/277VAC, 60Hz Voltage
- Load Requirements: 800VA at 120VAC



EXTERNAL SCREW-IN PIR SENSOR

EFS-HD07VR-PH-1

- 12VDC Input Power
- Screw in RCA Jack compatible with most standard receptacles
- Operating temperature of -20°C to 60°C
- Mounts up to 39ft
- Requires remote to adjust factory settings (HD05R)



EXTERNAL SCREW-IN MICROWAVE
SENSOR

EFS-HD07VR-MH-B-1

- 12VDC Input Power
- Screw in RCA Jack compatible with most standard receptacles
- Operating temperature of -20°C to 60°C
- Mounts up to 49ft
- Requires remote to adjust factory settings (HD05R)



CEILING MOUNTED PIR OCC
SENSOR

EFS-CMS-YM2301

- Replaces a standard light or fan switch
- Time-delay adjustment from 10 seconds up to 30 minutes
- Sensitivity adjustment
- Light level sensing adjustment sets brightness value upon activation



RF CONTROL

EFS-PPA401S

- Multi-volt: 120-277V
- 0-10V Dimming
- Operating Temperature of 0° - 40°C
- Rated up to 1200W
- Remote Required



BLUETOOTH CONTROL

EFS-PPA102S

- Multi-volt: 120-277V
- 0-10V Dimming
- Rated up to 13.1A
- Bluetooth Mesh
- App controlled



3-PIN NEMA PHOTOCELL

EFS-JL-205C23-IP65

- Multi-volt: 120-277V
- Turns on at 6 lux, turns off at 50 lux
- Operating Temperature of -40°C to 70°C
- Rated up to 1800W
- Preset 5-30 second time delay



480V NEMA PHOTOCELL

EFS-26WA86

- Input Voltage of 480V
- Turns on at 10-20 lux, off at 30-60 lux
- Operating Temperature of -40°C to 70°C
- Rated up to 1800W



PHOTOCELLS

EFS-JL-403C
EFS-JL-404C

- Multi-volt: 120-277V
- Turns on at 10-20 lux, turns off at 30-80 lux
- Operating Temperatures of -40°C – 70°C
- Rated for up to 5A
- Preset 3-10 second time delay



ACCESSORIES

180° PIR WALLBOX VACANCY & OCC SENSOR

EFS-SOVS-WH-MV

- PIR detects motion from heat-emitting source
- Replaces a standard light or fan single-pole switch
- Automatic ON/OFF and manual ON / Automatic OFF operation
- Neutral wire required
- LED Indicates motion was sensed
- Adjustable time delay from 15 seconds - 30 minutes
- Multi-volt



DIMMERS

EFS-DWS-010V-T
EFS-DWS-010V-D


- Multi-volt: 120-277V
- 0-10V Dimming
- Rated up to 600W
- Compatible with LED/CFL/Incandescent Lamps and Luminaires
- Single pole and 3 Way applications



Product Number

GFCI

EFS-GFCI-ST-20TR-WH-K	20 amp Self Testing Tamper
EFS-GFCI-ST-20TRWR-WH-K	20 amp Self Testing Tamper/WR
EFS-GFCI-ST-15TR-WH-K	15 amp Self Testing Tamper
EFS-GFCI-ST-15TRWR-WH-K	15 amp Self Testing Tamper/WR



Product Number

Switches

EFS-DS115	Single Pole Decora Switch 15 Amp
EFS-DS3115	3-way Decora Switch 15 Amp
EFS-DS415	4-way Decora Switch 15 Amp
EFS-TS115	Single Pole Toggle Switch 15 Amp
EFS-TS215	2-Way Toggle Switch Side 15 Amp
EFS-TS315	Duplex Horizontal Toggle Switch

Product Number

Receptacles

EFS-115R-S-WH	15 amp Duplex Single Recep.
EFS-120R-S-WH	20 amp Duplex Single Recep.
EFS-15R-D-WH	15 amp Decora Recep.
EFS-15R-D-TR-WH	15 amp Decora Recep. Tamper
EFS-15R-S-WH	15 amp Duplex Recep.
EFS-15R-S-TR-WH	15 amp Duplex Recep. Tamper
EFS-20R-D-WH	20 amp Indust Decora Recep.
EFS-20R-D-WH-TR	20 amp Indust Decora Recep. Tamper
EFS-20R-S-WH	20 amp COM Stand Duplex Recep.
EFS-DD30A-4S	Dryer/Range Receptacle, 30A
EFS-DD50A-4S	Dryer/Range Receptacle, 50A
EFS-TR20-DC	20 amp Tamper Decora Recep.
EFS-TR20-SC	20 amp Tamper Duplex Recep.
EFS-USB-15-TR	15 amp Receptacle USB Tamper
EFS-USB-20R-TR	20 amp Receptacle USB Tamper



ACCESSORIES

Product Number

Face Plates

EFS-1T-WH	1 Gang Phone Jack
EFS-1J-WH	1 Gang Coaxial Jack
EFS-1RP-WH	1 Gang Single Recep. Plate
EFS-BP1-WH	1 Gang Blank Plate
EFS-BP2-WH	2 Gang Blank Plate
EFS-DDR-PL2-SS	Dryer Stainless Steel Plate
EFS-DP1-WH	1 Gang Decorative Plate
EFS-DP2-WH	2 Gang Decorative Plate
EFS-DP3-WH	3 Gang Decorative plate
EFS-DP4-WH	4 Gang Decorative Plate
EFS-DRP1-WH	1 Gang Duplex Recep. Plate
EFS-DRP2-WH	2 Gang Duplex Recep. Plate
EFS-TP1-WH	1 Gang Toggle Plate
EFS-TP2-WH	2 Gang Toggle Plate
EFS-TP3-WH	3 Gang Toggle Plate



WIRE CONNECTORS

Broad offering of popular, standard types including Barrel, Winged and Winged Easy-turn and Push-in connectors:



Barrel

Product Number	Color
EFS-P6001	Red
EFS-P2001	Baby Blue
EFS-P4001	Yellow
EFS-P3001	Orange

Winged/Winged Easy

Product Number	Color
EFS-P1301	Red
EFS-N1001	Yellow (Easy)
EFS-P1101	Yellow
EFS-N2001	Red (Easy)
EFS-P1501	Big Grey
EFS-P1701	Big Blue
EFS-P9901	Green
EFS-P1201	Tan

Push-In


Product Number	Ports / Color
EFS-PC25201	2-port Red
EFS-PC25301	3-port Orange
EFS-PC25401	4-port Yellow

Product Number

EFS-6T-O-RING

GOOF RINGS

- 50 pack
- High quality white plastic goof rings for can lights and down lights
- Outside diameter: Approx. 7 7/8" or 20 cm
- Inside diameter: Approx. 5 7/8" or 15 cm
- Replaces the ring of a 6 inch baffle trim can light

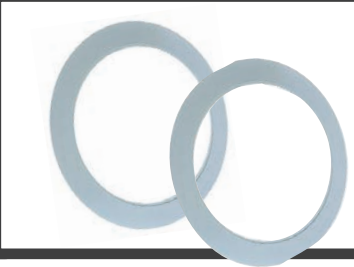

CABLE TIES

- 100 Pieces per bag
- Operating Temp: -4F ~ 185F
- 50lb tensile strength



Product Number	Description	Color	Length (in.)	Width (in.)
EFS-850-SMN	Screw Mount Plenum Cable Tie	Natural	8	0.19
EFS-850-N100	UV Rated Plenum Cable Ties	Natural	8	0.19
EFS-1150-N100	UV Rated Plenum Cable Ties	Natural	11	0.19
EFS-1450-N100	UV Rated Plenum Cable Ties	Natural	14.5	0.19
EFS-850-B100	UV Rated Plenum Cable Ties	Black	8	0.19
EFS-1150-B100	UV Rated Plenum Cable Ties	Black	11	0.19
EFS-1450-B100	UV Rated Plenum Cable Ties	Black	14.5	0.19

RMPAC Electrical
206 Cashmere Court
Centerville, GA 31028

FEDERAL LEVEL SERVICE FOR YOUR EVERY DAY NEEDS



RMPAC GROIUP is a rapidly growing Veteran Owned Small Business (VOSB) with its main office in Georgia and distribution nationwide. We focus on providing a full range of services, including Real Estate Management, Construction, and Manufacturing to, not only the Federal government, but to state and local agencies as well and commercial businesses.

rmpacgroup.com/electrical

855-777-6277

Save up to 65% on your monthly power bill by switching to RMPAC Electricals LED lighting solutions!