



ATN RM11 1-3k

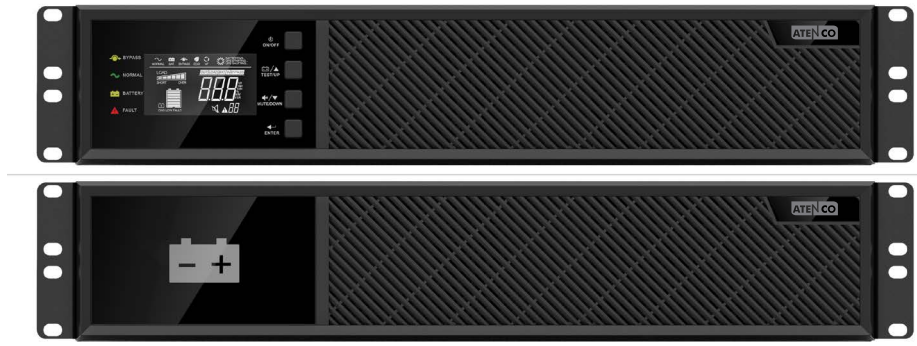




Key features

- True double-conversion design with high adaptability to harsh mains conditions
- 0.9 output power factor with up to 12.5% more power offer than traditional 0.8pf.
- 2U short depth compact size for space saving.
- Programmable LCD display for quick UPS parameters configuration
- Optional 2U EBM (Extended Battery Module) available for battery expansion
- Various communication for easy management: RS232/USB, EPO, mini slot
- Certificates cTUVus, FCC

Typical application

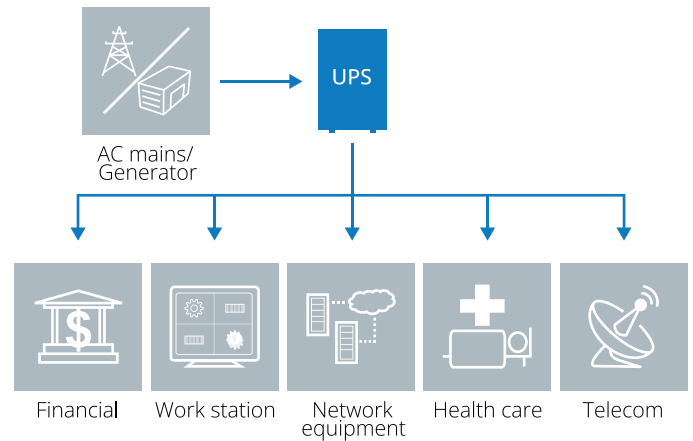

Rear panel

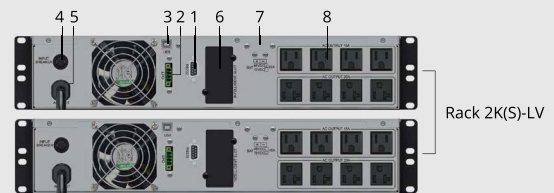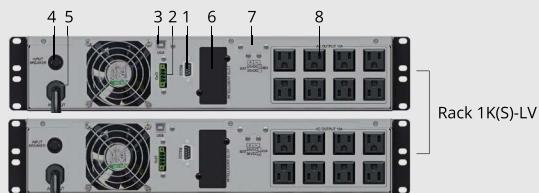

1. RS232
2. EPO/ROO
3. USB

4. Input circuit breaker
5. Ac input
6. Intelligent card slot

7. External battery connector
8. Ac output

Product specification

MODEL	Product Line	ATN RM11 1-3KVA					
		1K	1KS	2K	2KS	3K	3KS
CAPACITY	VA/W	1000VA/900W		2000VA/1800W		3000VA/2700W	
INPUT	Rated Voltage	110/115/120/125VAC, Default 120VAC					
	Input Voltage Range	100 ~ 300 VAC					
	Frequency Range	45~55 Hz/54~66 Hz					
	Input Wiring	Single Phase with Ground					
OUTPUT	Output Power Factor	0.9					
	Nominal Output Voltage	110/115/120/125VAC, Default 120VAC					
	Voltage Regulation	±1%					
	Frequency Range (Battery Mode)	50/60Hz ±0.05Hz					
	Over Load	100%~105% continuous. 60Sec.@105%~130% Rated Load					
	Voltage Distortion (THDv)	<2% @ linear load					
	Output Waveform	Pure Sine Wave					
Parallel Operation	N/A						
EFFICIENCY	Inverter Mode	88%		89%		90%	
BATTERY	Battery Type	VRLA	VRLA	VRLA	VRLA	VRLA	VRLA
	Battery	12V / 7Ah	N/A	12V / 7Ah	N/A	12V / 7Ah	N/A
	Number of Internal Battery	2	N/A	4	N/A	6	N/A
	Rated Battery Voltage	24VDC	36VDC	48VDC	72VDC	72VDC	72VDC
	Charging Current	1A	4A	1A	4A	1A	4A
	Recharging time (90%)	5 hours	N/A	5 hours	N/A	5 hours	N/A
TRANSFER TIME	Battery Mode <-> Inverter Mode	0ms					
	Inverter Mode <-> Bypass Mode	<4ms					
	ECO Mode <-> Battery Mode	<10ms					
DISPLAY		Segment LCD					
AUDIBLE ALARM		Yes					
DIMENSION	W x H x D (mm)	439x88x388			439x88x640		439x88x388
ENVIRONMENT	Operating Temperature	0~40 °C					
	Regulation	cTUVus, FCC					
	Noise Level	<55dB (ISO 7779&At front 1m distance, without buzzer)					
INTERFACE	RS232/USB	Yes					
	External Slot	Yes, for optional NMC Card/CMC Modbus Card/AS400 Card					
	Emergency Power Off	Yes					

* Due to continuous product improvement programs, specifications are subject to change without notice.

ATENCO POWER TECH CO., LTD
 2F-7, No. 14, Xiwei Street, Sanzhong district, New Taipei City.
 24155, Taiwan, R.O.C.
 Tel.: +886 2 22807098
 Fax.: +886 2 22802939
 Website: www.atenco.com.tw

