



(12) **United States Patent**  
**Rhyan**

(10) **Patent No.:** **US 10,888,682 B2**  
(45) **Date of Patent:** **Jan. 12, 2021**

(54) **PORTABLE RETRACTABLE REELING SYSTEM AND METHOD FOR OXYGEN TUBING MANAGEMENT**

A61M 16/0672; A61M 16/08; A61M 16/0875; A61M 2202/0208; A61M 2209/06; A61M 2209/08; A61M 2209/088  
USPC ..... 137/355.19, 355.26  
See application file for complete search history.

(71) Applicant: **D'Andre Rhyan**, Waukegan, IL (US)

(72) Inventor: **D'Andre Rhyan**, Waukegan, IL (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 222 days.

(21) Appl. No.: **15/946,705**

(22) Filed: **Apr. 5, 2018**

(65) **Prior Publication Data**

US 2018/0289915 A1 Oct. 11, 2018

**Related U.S. Application Data**

(60) Provisional application No. 62/481,682, filed on Apr. 5, 2017.

(51) **Int. Cl.**

**A61M 16/06** (2006.01)  
**B65H 75/44** (2006.01)  
**B65H 75/40** (2006.01)

(52) **U.S. Cl.**

CPC ..... **A61M 16/0672** (2014.02); **B65H 75/40** (2013.01); **B65H 75/446** (2013.01); **B65H 75/4471** (2013.01); **B65H 75/4478** (2013.01); **B65H 75/4492** (2013.01); **A61M 2202/0208** (2013.01); **A61M 2209/06** (2013.01); **A61M 2209/088** (2013.01); **B65H 2701/33** (2013.01)

(58) **Field of Classification Search**

CPC .... B65H 75/40; B65H 75/406; B65H 75/446; B65H 75/4471; B65H 75/4478; B65H 75/4492; B65H 2701/33; A61M 16/0666;

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,083,621 A \* 4/1978 Davidson ..... H02G 11/02  
439/501  
4,384,688 A \* 5/1983 Smith ..... B65H 75/4434  
191/12.2 R  
4,467,979 A \* 8/1984 Koehler ..... B65H 75/40  
191/12.4  
10,221,037 B1 \* 3/2019 Blasbalg ..... B65D 25/2802  
2002/0195143 A1 \* 12/2002 Paplow ..... A61M 16/0672  
137/355.2  
2003/0146332 A1 \* 8/2003 Vinding ..... A61M 16/0672  
242/378.4  
2016/0304311 A1 \* 10/2016 Buck ..... B65H 75/4471  
2017/0239011 A1 \* 8/2017 Lucas ..... A61M 39/08

\* cited by examiner


*Primary Examiner* — Joseph D. Boecker

(74) *Attorney, Agent, or Firm* — Christopher Mayle; Thomas E. LaGrandeur; Bold IP, PLLC

(57) **ABSTRACT**

A portable retractable oxygen tubing reel providing improved portability and mechanical reeling functionality. The portable retractable oxygen tubing reel includes tubing wrapped around an inner circular component stored within an outer storage compartment whereby a handle attached to the inner circular component may be rotated to wind or unwind tubing from the portable retractable oxygen tubing reel. Tubing may then be connected to a medical oxygen storage device at one end and a nasal oxygen cannula positioned near in proximity to a patient's nose for breathing oxygen at the other end.

**6 Claims, 6 Drawing Sheets**

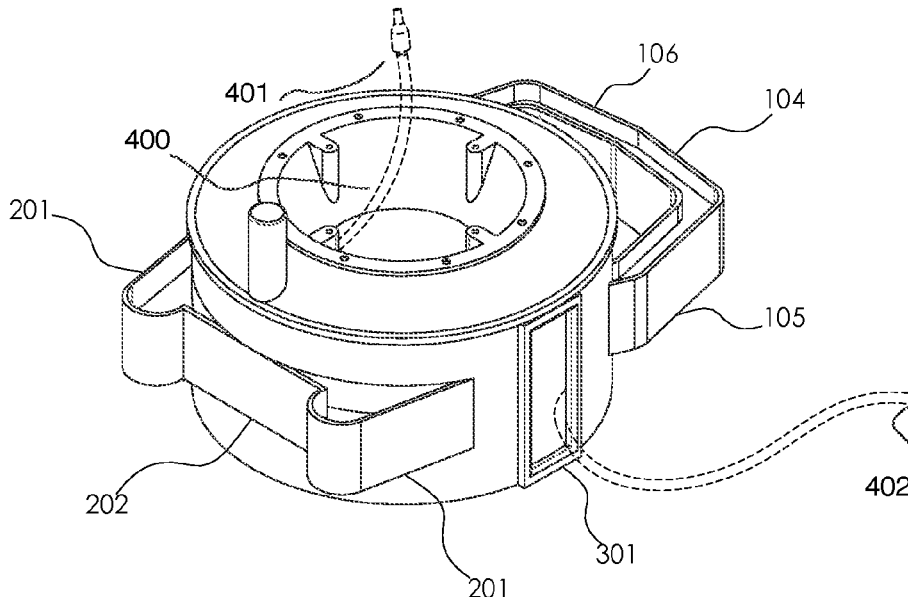

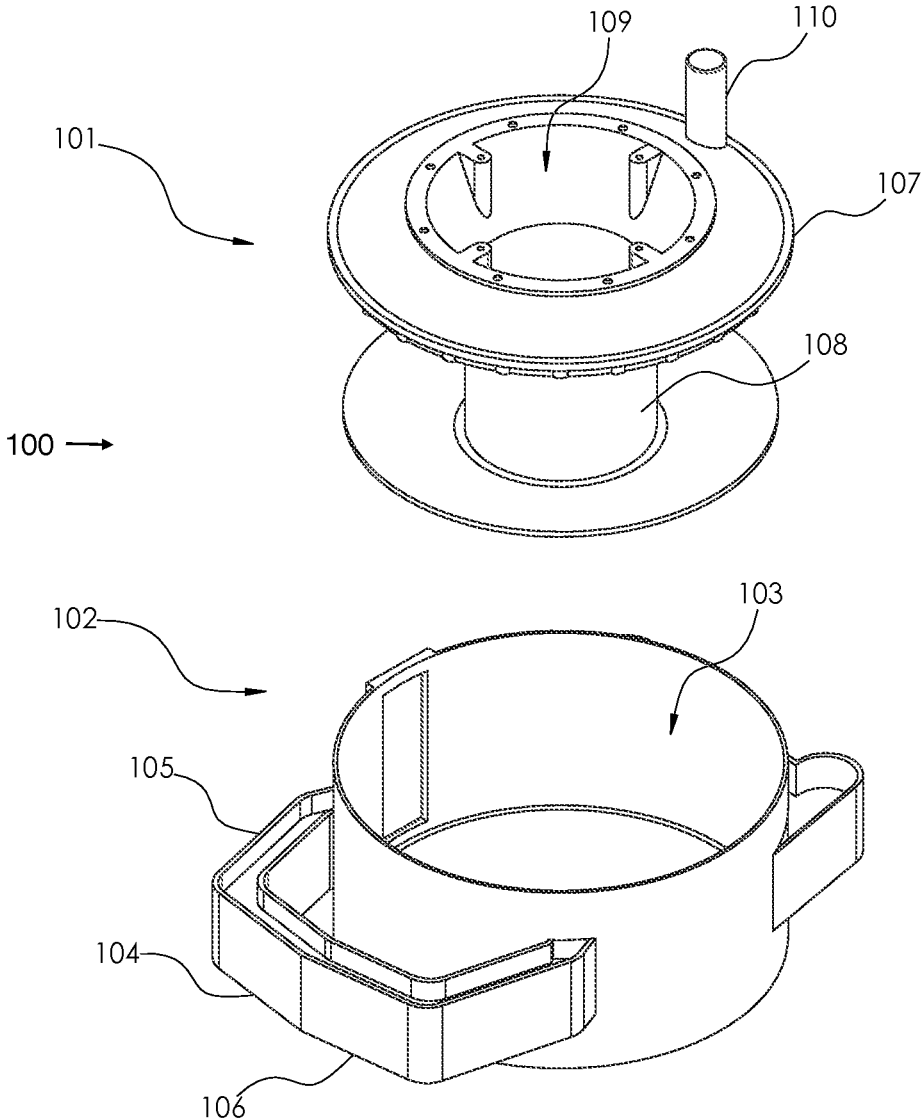


Figure 1

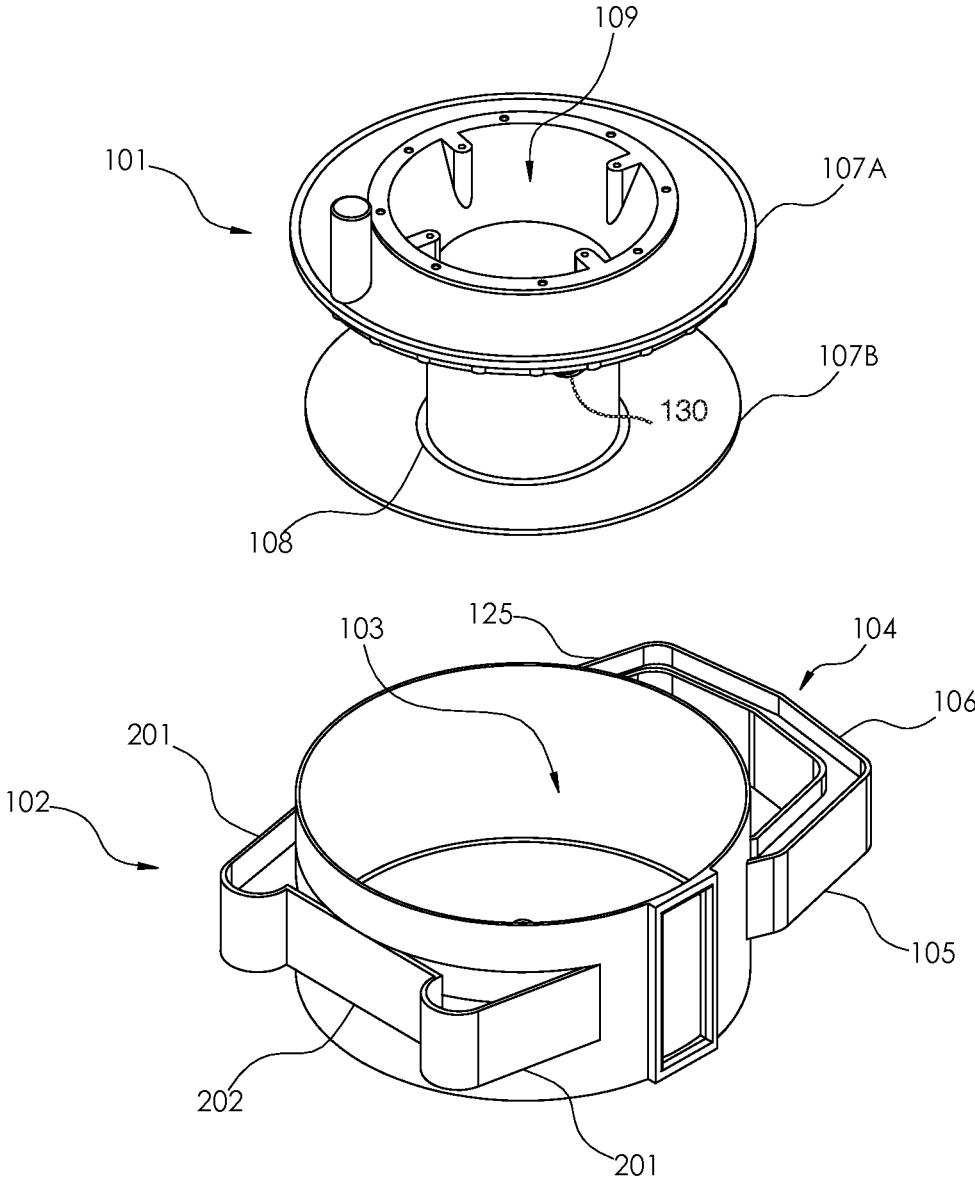


Figure 2

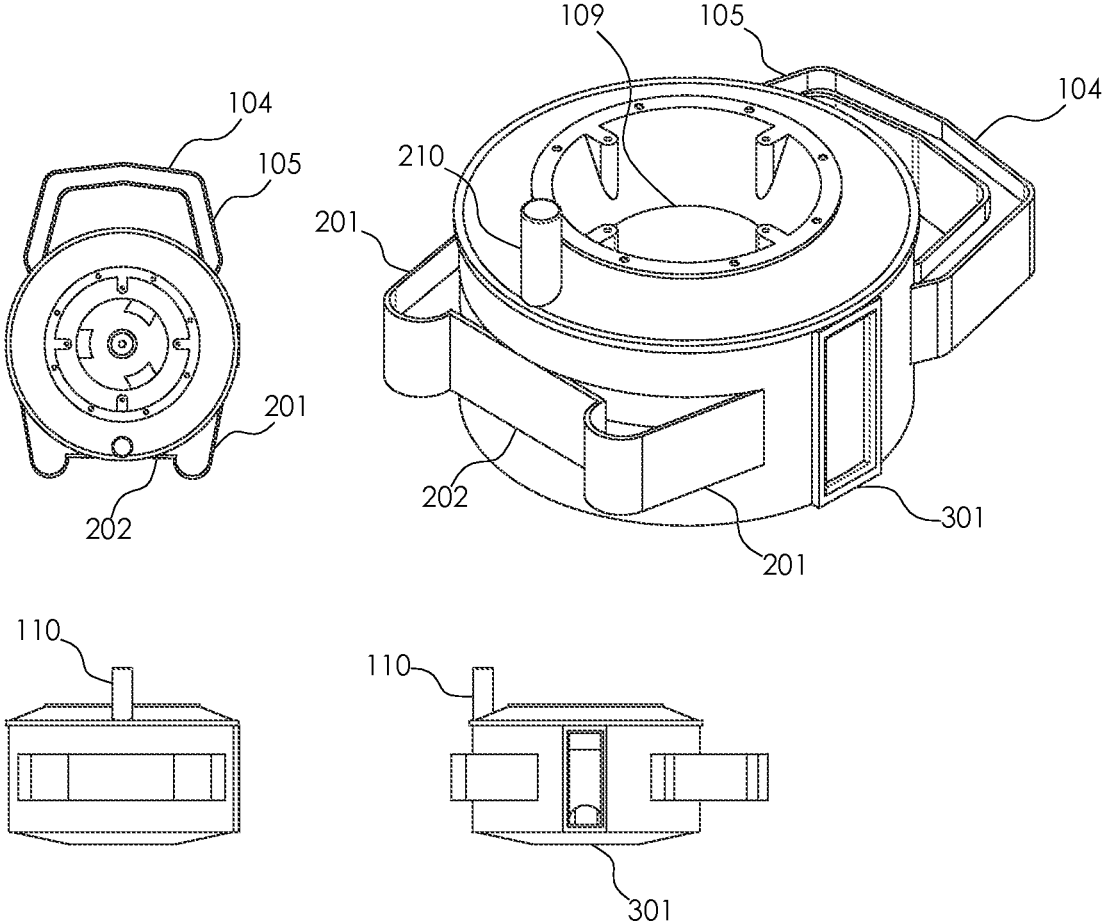


Figure 3

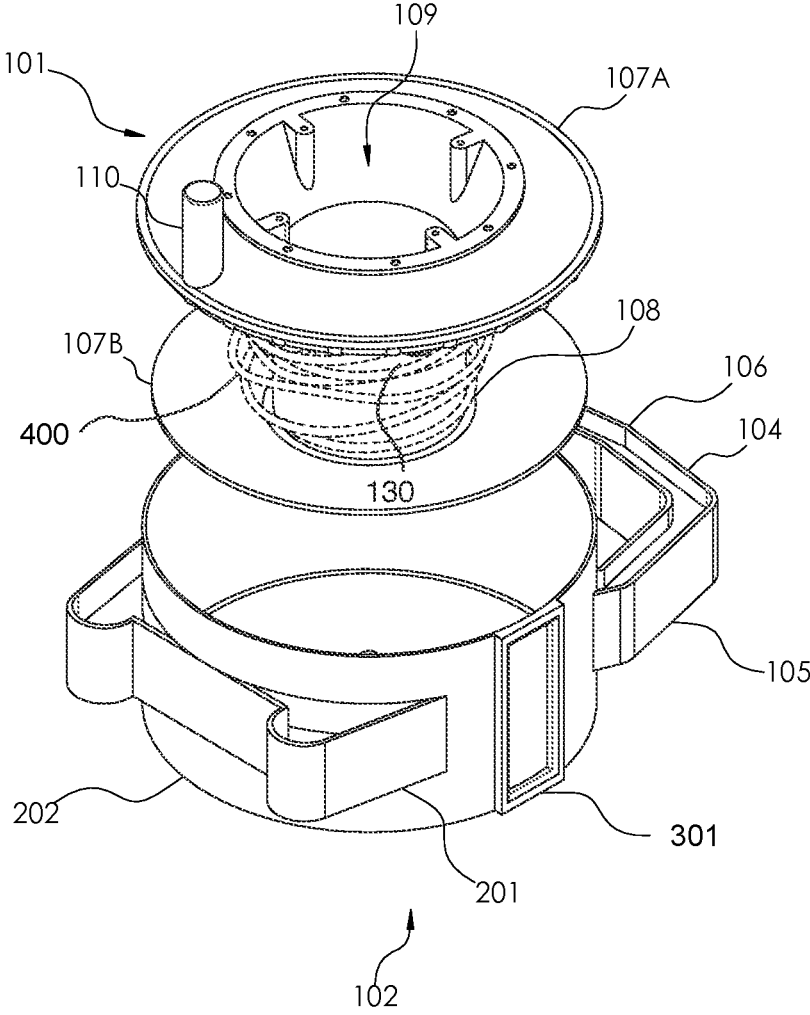


Figure 4

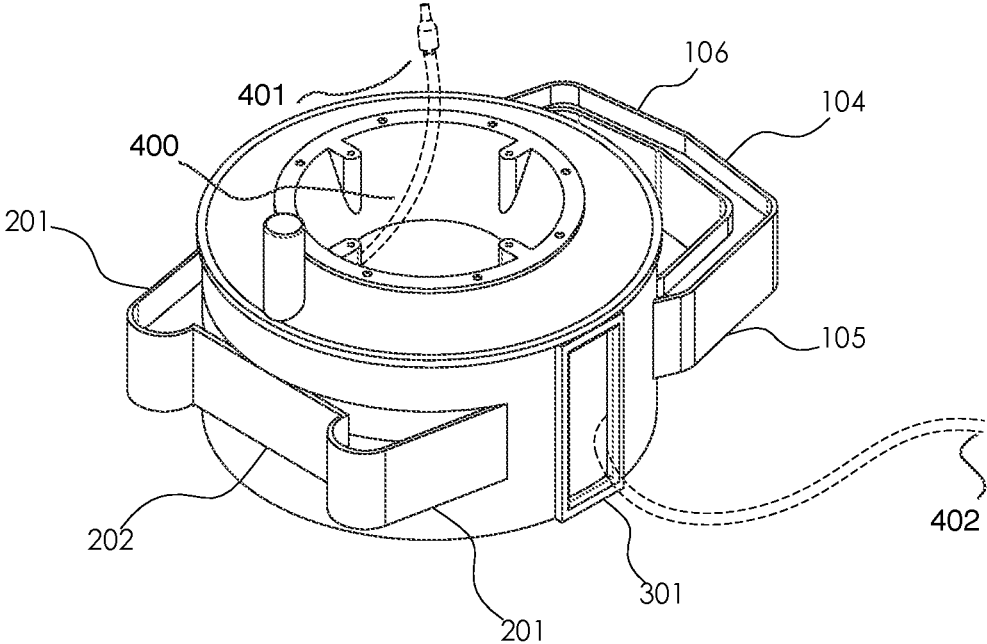


Figure 5

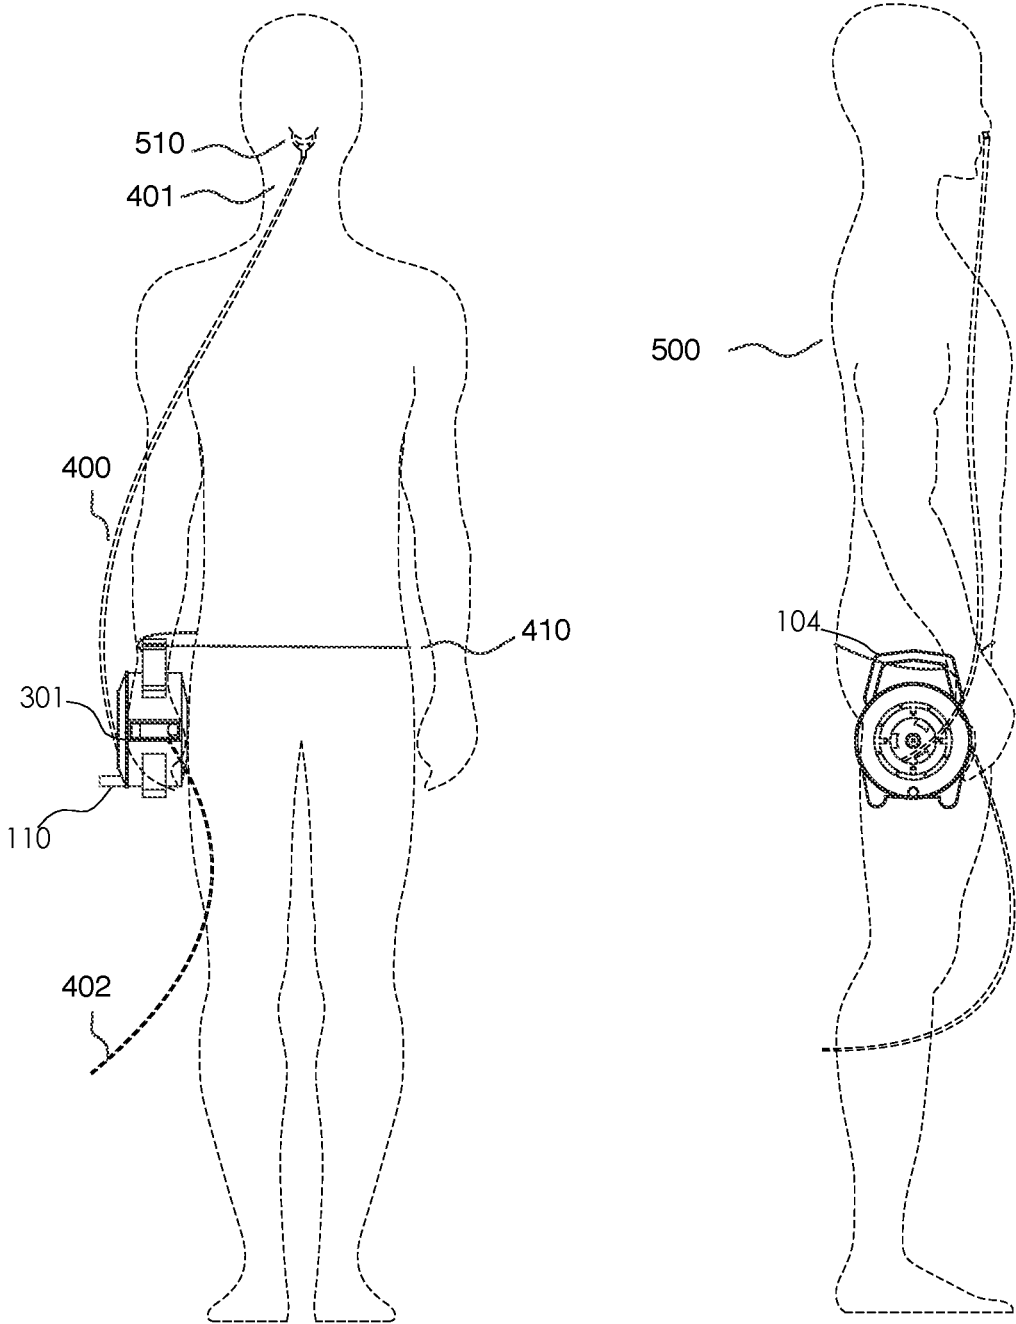


Figure 6

1

**PORTABLE RETRACTABLE REELING  
SYSTEM AND METHOD FOR OXYGEN  
TUBING MANAGEMENT**

CROSS-REFERENCE TO RELATED  
APPLICATIONS

This application claims priority to U.S. Provisional Application No. 62/481,682, filed on Apr. 5, 2017. The content of the above application is hereby expressly incorporated by reference herein in its entirety.

FIELD OF DISCLOSURE

The overall field of this invention is a system and method for a tubing reel. More particularly, the invention is directed to a convenient oxygen tubing reel capable of attachment to a medical oxygen storage device to provide for increased mobility to a patient as well as to have the patient no longer encumbered by excessive slack when walking around the surrounding area.

BACKGROUND

One of the most often administered hospital treatments is oxygen therapy. Oxygen therapy is a treatment that delivers oxygen gas to assist a patient in breathing. Oxygen therapy may be provided from tubes resting in one's nose, via a face mask, or via a tube placed in one's trachea, or windpipe. This treatment may increase the amount of oxygen received in a one's lungs receive and delivered through one's blood. Oxygen therapy may be prescribed for a wide variety of reasons including chronic obstructive pulmonary disease (COPD), which is a progressive chronic inflammatory lung disease that causes obstructed airflow from the lungs. Other reasons may include chronic bronchitis, emphysema, major trauma, anaphylaxis, major hemorrhage, shock, convulsions, and hypothermia. To provide the patient with more oxygen, large medical oxygen storage devices that are usually in the form of tanks holding compressed oxygen may be taken home when the patient leaves the hospital to continue treatment.

These tanks are usually large and awkward to carry around and can drastically decrease the patient's quality of life by limiting their mobility since continued treatment requires proximity to the medical oxygen storage device. Smaller more portable tanks have also been used, but these smaller tanks need to be refilled every few hours, which can be a bother. As well, many older patients in their increased age found the tanks difficult to move even with lesser weight.

Long lengths of tubing connected to the oxygen tank have also been used to extend one's range of movement, thus letting the patient be at a greater distance from the oxygen tank. However, tears, bends, and kinks appear quite frequently in the tubing, which is a problem. Additionally, the tubing can easily become wrapped around furniture or other objects located throughout a patient's home or other surrounding area that the patient is located, thereby restricting the airflow within the tubing and preventing optimal oxygen delivery to the patient. Patients also have been reported to trip and fall over such large, added lengths of tubing.

Multiple methods and systems are currently available that allow the tubing to be spooled and unspooled so that only a minimal amount of tubing necessary is unreeled and exposed through the patient's home or other surrounding area. U.S. Pat. No. 6,591,858 uses a complicated array of

2

ratcheting mechanisms, springs, and gears to coil and uncoil the tubing and proving to be far too mechanically complicated and bulkier. U.S. Pat. Nos. 6,889,688 and 5,826,608 are likewise large in size and have a complicated spring loaded spooling reel mechanism. The large size and complicated machinery of these devices decrease portability while increasing the device's price and repair costs. Other devices currently on the market use electricity to power their spooling mechanisms. The required proximity to an electrical source further decreases the portability of these units. Electric parts also lead to a higher price higher base and repair costs with more components that may become easily damaged.

Thus, a need for a system and method of using a truly portable tubing spooling providing storage with a manual retraction mechanism that can be produced and repaired cheaply exists.

SUMMARY

The present invention will be described by way of exemplary embodiments, but not limitations, illustrated in the accompanying drawings in which like references denote similar elements, and in which:

According to one embodiment, a portable retractable oxygen tubing reel that includes an inner component and an outer storage compartment, the inner component insertable within the outer storage component. Further, the inner component may be rotatable within the outer storage component. The outer storage compartment may have an opening. The inner component may include an upper and lower disc that may be connected by a cylinder, with the cylinder positioned in between the upper and lower discs. In one embodiment, the cylinder, upper, and lower disc may have a hole pass through, as well as tubing that is configured to be wound around the cylinder of the inner component and fed through the hole and the opening. The portable retractable oxygen tubing reel may include a first handle, whereby the handle may be attached to the upper disc and may protrude in an outward direction. Further, an embodiment of the portable retractable oxygen tubing reel may include a second handle, the second handle being attached to an outer surface of outer storage component.

According to one embodiment, a method of dispensing and retracting oxygen tubing may include connecting a first end of a length of tubing to a nasal oxygen cannula, winding tubing around a portable retractable oxygen tubing reel, the portable retractable oxygen tubing reel having an inner component and an outer storage compartment, the outer storage compartment having an opening and the inner component including an upper and lower disc connected by a cylinder. The cylinder may be positioned in between the upper and lower discs, whereby the cylinder, upper and lower disc may have a hole pass through. The portable retractable oxygen tubing reel, in one embodiment, may further include a handle, the handle being attached to the upper disc, which may protrudes outwardly, with the tubing wound around the cylinder of the inner component. The inner compartment may be inserted into the outer storage component, and the tubing fed through the opening in the outer storage compartment. The method may further include connecting a second end of the tubing to a medical oxygen storage device, connecting nasal oxygen cannula to a user's nose, including at least one of steps of the user moving forward, pulling on the tubing, rotating the handle in one direction causing the tubing to unspool from the cylinder, rotating the handle in a direction opposite of the first



direction causing the tubing to spool around the cylinder, disconnecting the nasal oxygen cannula from the user's nose, and disconnecting the second end of the tubing from the medical oxygen storage device.

### BRIEF DESCRIPTION OF DRAWINGS

The present invention will be described by way of exemplary embodiments, but not limitations, illustrated in the accompanying drawings in which like references denote similar elements, and in which:

FIG. 1 is a perspective, top-view illustration, showing a portable retractable reeling spool for medical line management in accordance with an illustrative embodiment.

FIG. 2 shows an exploded perspective view of the portable retractable reeling spool in accordance with an illustrative embodiment.

FIG. 3a is front-view illustration, showing the assembled portable retractable reeling spool in accordance with an illustrative embodiment.

FIG. 3b is a perspective illustration, showing the assembled portable retractable reeling spool in accordance with an illustrative embodiment.

FIG. 3c is top-view illustration, showing the assembled portable retractable reeling spool in accordance with an illustrative embodiment.

FIG. 3d is side-view illustration, showing the assembled portable retractable reeling spool in accordance with an illustrative embodiment.

FIG. 4 is a perspective, top-view illustration, showing the tubing wrapped around the central hub of the portable retractable reeling spool in accordance with an illustrative embodiment.

FIG. 5 is a perspective, top-view illustration, of an inner component assembled together with the outer storage component of the portable retractable reeling spool, and further shows the tubing of the portable retractable reeling spool exiting through a center opening and exiting out the portable retractable reeling spool through another hole in accordance with an illustrative embodiment.

FIG. 6 is an illustration, showing the portable retractable reeling spool in use on a patient in accordance with an illustrative embodiment.

### DEFINITIONS

**Longitudinal axis:** An imaginary generally straight line that runs through the center of the portable retractable reeling spool intersecting the square handle and the generally straight portion that connects the generally curved portions.

**Latitudinal axis:** An imaginary generally straight line that runs through the center of the portable retractable reeling spool perpendicular to the longitudinal axis and intersects both of the openings.

### DETAILED DESCRIPTION

In the Summary above and in this Detailed Description, and the claims below, and in the accompanying drawings, reference is made to particular features of the invention. It is to be understood that the disclosure of the invention in this specification includes all possible combinations of such particular features. For example, where a particular feature is disclosed in the context of a particular aspect or embodiment of the invention, or a particular claim, that feature can also be used, to the extent possible, in combination with

and/or in the context of other particular aspects and embodiments of the invention, and in the invention generally.

Where reference is made herein to a method comprising two or more defined steps, the defined steps can be carried out in any order or simultaneously (except where the context excludes that possibility), and the method can include one or more other steps which are carried out before any of the defined steps, between two of the defined steps, or after all the defined steps (except where the context excludes that possibility).

"Exemplary" is used herein to mean "serving as an example, instance, or illustration." Any aspect described in this document as "exemplary" is not necessarily to be construed as preferred or advantageous over other aspects.

Throughout the drawings, like reference characters are used to designate like elements. As used herein, the term "coupled" or "coupling" may indicate a connection. The connection may be a direct or an indirect connection between one or more items. Further, the term "set" as used herein may denote one or more of any item, so a "set of items," may indicate the presence of only one item, or may indicate more items. Thus, the term "set" may be equivalent to "one or more" as used herein.

In the following detailed description, numerous specific details are set forth in order to provide a more thorough understanding of the one or more embodiments described herein. However, it will be apparent to one of ordinary skill in the art that the invention may be practiced without these specific details. In other instances, well-known features have not been described in detail to avoid unnecessarily complicating the description.

The present disclosure recognizes the unsolved need for a portable retractable reeling spool providing storage with a manual retraction mechanism. Unlike conventional devices, the portable retractable reeling spool does not need electricity, lacks mechanical complication, and is small enough in size that anyone can easily carry it around the house. Oxygen tubing enters from medical oxygen storage device through one side of the portable retractable reeling spool. Tubing then wraps around the central hub of the portable retractable reeling spool such that it lies flush with the central hub and exits through another hole where the tubing may be attached to a nasal oxygen cannula or other apparatus. To use the portable retractable reeling spool, the patient may easily pull on the oxygen tubing which is able to reel out of the portable retractable reeling spool. To return the tubing back into the portable retractable reeling spool **100**, the patient can manually wind up the device using an attached handle.

FIG. 1 depicts a non-limiting embodiment of portable retractable reeling spool **100**. Portable retractable reeling spool **100** may include an inner circular component such as inner component **101** and an outer storage component such as outer storage component **102**. Outer storage component **102** may have a hollow central circular portion such as hollow central circular portion **103**. Central circular portion **103** may be connected to a handle such as handle **104**. Handle **104** is depicted to be square in shape, however this is non-limiting and handle **104** may be a rectangle, circle, semicircle, hexagon, octagon, prism, horseshoe, rod, trapezoid, or any other suitable shape. For example, in some embodiments an arcuate handle may be used.

Handle **104** may have two generally straight portions such as portions **105** extending from central circular portion **103** parallel to portable retractable reeling spool's **100** longitudinal axis. Portions **105** may be parallel to portable retractable reeling spool's **100** longitudinal axis and may be

connected by a generally straight portion such as portion **106** that runs parallel to portable retractable reeling spool's **100** latitudinal axis. In some embodiments, straps (not shown) may also be used to tie portable retractable reeling spool around the patient's waist or to hang portable retractable reeling spool **100** from the patient's shoulder to further secure portable retractable reeling spool **100** to the patient and reduce the needed effort in carrying portable retractable reeling spool **100** around the surrounding area.

At the bottom of central circular portion **103** may be at least two generally curved portions such as portions **201**, as best seen in FIG. 2, that allow portable retractable reeling spool **100** to stand upright on a horizontal surface such as a table for storage and stability. At least one of portions **201** may extend generally parallel to portable retractable reeling spool's **100** latitudinal axis, from each side of the bottom of portable retractable reeling spool **100**. Portions **201** are connected by a generally straight portion such as portion **202** that runs generally parallel to portable retractable reeling spool's **100** latitudinal axis. Other methods to keep portable retractable reeling spool **100** upright on a horizontal surface may be used such as fastening plurality of studs or knobs on the bottom of central circular portion **103**. Studs may be of any shape and size including being in the shape of a cube, pyramid, prism, cylinder, or sphere. The bottom side of portion **202** may include an additional gripping surface material or any suitable adhesive, so that either the surface material or adhesive may prevent slippage between portable retractable reeling spool **100** and another surface.

Inner component **101** may have two circular disc sections such as circular disc sections **107A** and **107B** connected by a circular tubular section such as circular tubular section **108**. Circular disc sections **107A**, **107B** may extend radially past central circular tubular section **108** on the upper and lower ends of central circular tubular section **108**. Central circular tubular section **108** may extend vertically upwards between circular disc sections **107A** and **107B**, which are respectively oriented horizontally.

FIG. 3a, 3b, 3c, 3d shows the inner component **101** inserted into outer storage component **102** or in an assembled view. As shown in FIG. 3a, 3b, 3c, 3d, only circular disc section **107A** is visible after inner component **101** is inserted into outer storage component **102**. In one embodiment, circular disc section **107A**, may have an opening such as opening **109**. In one embodiment, opening **109** may be 5 inches in diameter, although those of ordinary skill in the art will appreciate that any suitable diameter may be used. A tubular handle, such as tubular handle **110**, may rotate inner component **101**. Tubular handle **110** may be attached to the periphery of circular disc **107A** and may extend outwardly and parallel to the axis of rotation. Tubular handle **110** extends from the non-hollow portion of circular disc section **107A** perpendicularly to portable retractable reeling spool's **100** longitudinal and latitudinal axes.

In one embodiment, the length between circular disc sections **107A** and **107B**, and thus the length of central tubular section **108**, may be five inches. Additional exemplary dimensions for the inner component **101** may be  $3 \times 5\frac{1}{4} \times 5\frac{3}{8}$  inches. Outer storage component **102** may preferably be  $2 \times 3\frac{3}{8} \times 5\frac{1}{2}$  inches. Further, it may be preferable for there to be enough space between inner component **101** and the outer storage component **102** to facilitate the ease of reeling. It is noted that the above-listed dimensions are non-limiting and any size or dimension may be used based on the specific needs of the oxygen delivery requirements as well as the size of the oxygen tubing and medical oxygen storage device.

Inner component **101** may be connected to outer storage component **102** using a swivel or other suitable connector, allowing inner component **101** to spin freely. One opening such as opening **301** (e.g. as shown in FIG. 3d) may exist on each of the side walls of central circular portion **103** along with opening **109** on the top face of circular disc section **107A** of the inner component **101**.

In one embodiment, tubing, such as tubing **400**, shown in FIG. 4, may enter through opening **301** and wrap around central tubular section **108** (e.g. as shown in FIG. 2 and FIG. 4) before exiting through opening **109** (e.g. as shown in FIG. 5) in top face of circular disc section **107A**. In one embodiment, only 2 to 3 inches of tubing **400** protrudes out of opening **109**. At least one guide, such as guide **130** (e.g. as shown in FIGS. 2 and 4), may be present on central tubular section **108**, keeping tubing **400** flush against central tubular section **108**.

Tubular handle **110**, extending away from the top face of circular disc section **107A**, is configured to turn inner component **101** and to retract tubing **400** into portable retractable reeling spool **100**. Both the front and back of portable retractable reeling spool **100** may be enclosed except for opening **301** and opening **109** where tubing **400** enters and leaves portable retractable reeling spool **100**.

Portable retractable reeling spool **100** components may be made from any suitable material known in the art. In one embodiment, portable retractable reeling spool **100** may be made out of plastic, which may be sterilized through systems such as an autoclave, having elevated steam temperature and pressure different from ambient air pressure to kill bacteria, spores and germs resistant to boiling water and powerful detergents. Alternatively handle **104**, portions **20**, and portion **202**, may be made of any material suitable to provide structural stability needed for the portable retractable reeling spool **100**. In one, exemplary embodiment, it may be preferable for portable retractable reeling spool **100** to weigh less than two pounds. Further, it may be beneficial for portable retractable reeling spool **100** is no larger than 30 inches across to be less of a hindrance while being carried by a patient. These dimensions and weight are however non-limiting and may be varied and altered in any way as needed to suit the user. Further considerations may include the specific needs of the oxygen delivery requirements as well as the size of the tubing and medical oxygen storage device.

FIG. 6 may show portable retractable reeling spool **100** and one exemplary method of its use. As shown in FIG. 6, a first end such as first end **401** of the tubing **400** is pulled through opening **109** with first end **401** connected to a nasal oxygen cannula or other apparatus such as nasal oxygen cannula **510** suitable for being positioned near in proximity to a patient, such as patient's **500**, for purposes of assisting patient **500** in breathing oxygen. Nasal oxygen cannula **510** may be any suitable type of nasal oxygen cannula as known in the art. Nasal oxygen cannula **510**, in one embodiment, may include plastic tubing that fits behind the ears of patient **500** and further includes a set of prongs that are placed in the nostril of patient **500**. A nasal oxygen cannula, such as **510**, helps to provide supplemental oxygen to patient **500**.

Continuing with a method of using portable retractable reeling spool **100**, in one embodiment, the rest of tubing **400** is then wrapped around central tubular section **108**. Inner component **101** is then inserted into outer storage compartment **102**. Once inner component **101** is inserted into outer storage compartment **102**, the second end such as second end **402** of tubing **400** is threaded through opening **301** suitable for being connected to a medical oxygen storage

device (not shown). Nasal oxygen cannula 510 is then positioned near in proximity to a patient's 500 nose for breathing oxygen. Patient 500 may fasten a strap such as strap 410 around handle 104 of portable retractable reeling spool 100 and patient's 500 waist to further secure portable retractable reeling spool 100 to patient 500.

When patient 500 wishes to extend tubing 400 to provide more slack, patient 500 may either move forward and tubing 400 will naturally unspool, pull on tubing 400 as it exits the portable retractable reeling spool 100, or rotate inner component 101 using tubular handle 110. To retract tubing 400 into portable retractable reeling spool 100, tubular handle 110 may be rotated in the opposite direction from the direction used to unspool tubing 400.

Portable retractable reeling spool 100 may be removed from patient 500 after use by detaching nasal oxygen cannula 510 from patient's 500 nose, removing tubing 400 from the medical oxygen storage device, and reeling in tubing 400 by rotating inner component 101 using handle 110 in the opposite direction from the direction used to unspool tubing 400. Portable retractable reeling spool 100 may then be placed on a horizontal surface or stored for subsequent use.

Tubing 400 may be replaced by detaching nasal oxygen cannula 510 and reeling in tubing 400 by rotating inner component 101 using tubular handle 110 in the opposite direction from the direction used to unspool tubing 400. Inner component 101 is then removed from outer storage compartment 102. Tubing 400 is then pulled out of opening 109 and unwound from central tubular section 108. Tubing 400 then may be replaced by new tubing. Cleaning of tubing 400 should not be attempted without proper guidance or the necessary equipment.

Embodiments for a portable retractable spooling reel have been provided herein, which may allow for a patient to receive oxygen from a medical oxygen storage device at a greater distance and with less difficulty than conventional devices. Further, the embodiments provided herein offer a mechanically advantageous way to dispense and retract the length of the tubing from one or more embodiments of a portable retractable spooling reel that allows for greater free movement to the patient as well as prevents excess tubing from being caught or restricted by objects in the surrounding area.

The foregoing description of the invention has been presented for purposes of illustration and description and is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best use the invention in various embodiments and with various modifications suited to the use contemplated. The scope of the invention is to be defined by the above claims.

What is claimed is:

1. A portable retractable oxygen tubing reel comprising: an inner component and outer storage compartment, the inner component removably insertable within an aperture through the outer storage compartment, the inner component rotatable within the outer storage compartment, the outer storage compartment having an opening, the inner component comprising an upper and a lower disc, the upper disc and the lower disc connected by a cylinder, the cylinder positioned in between the upper disc and the lower disc, a hole passing through the upper disc and the lower disc and the cylinder; the

upper disc accessible and viewable when the inner component is inserted into the outer storage compartment;

tubing configured to be wound around the cylinder of the inner component and fed through the hole and the opening;

a nasal oxygen cannula, the nasal oxygen cannula removably connected to a first end of the tubing, a second end of the tubing configured to be connected to a medical storage device; and

one or more straps, the straps configured to be fastened to a holding handle attached to an outer surface of the outer storage compartment, wherein the inner component is configured to rotate causing the tubing to unspool when a user moves forward.

2. The portable retractable oxygen tubing reel of claim 1, further comprising a handle, the handle attached to the upper disc, the handle protruding outward from the upper disc.

3. The portable retractable oxygen tubing reel of claim 1, further comprising a stand, the stand attached to the outer surface of the outer storage compartment, the stand having gripping surface material to prevent slippage.

4. The portable retractable oxygen tubing reel of claim 1, the portable retractable oxygen tubing reel further comprising a guide on the cylinder.

5. The portable retractable oxygen tubing reel of claim 1, the portable retractable oxygen tubing reel being smaller than thirty inches across a length of the outer storage compartment.

6. A portable retractable oxygen tubing reel comprising: an inner component and an outer storage compartment, the inner component removably insertable within an aperture of the outer storage compartment, the inner component rotatable within the outer storage compartment, the outer storage compartment having an opening therethrough, the inner component comprising an upper disc and a lower disc, the upper disc and the lower disc connected by a cylinder, the cylinder positioned in between the upper disc and the lower disc, a hole passing through the upper disc and the lower disc and the cylinder, the outer storage compartment an open cylinder, the upper disc accessible and viewable when the inner component is inserted into the outer storage compartment;

tubing configured to be wound around the cylinder of the inner component and fed through the hole and the opening;

a holding handle, the holding handle attached to the upper disc, the holding handle protruding outward from the upper disc;

a stand, the stand attached to an outer surface of the outer storage compartment, the stand having gripping surface material to prevent slippage;

a tubular handle, the tubular handle attached to an outer surface of the outer storage compartment;

a nasal oxygen cannula, the nasal oxygen cannula removably connected to a first end of the tubing;

a medical oxygen storage device, the medical oxygen storage device removably connected to a second end of the tubing; and

one or more straps, the straps configured to be fastened to the holding handle attached to the outer surface of the outer storage compartment, wherein the inner component is configured to rotate causing the tubing to unspool when a user moves forward.