



TORGINOL® WOOD is manufactured from a range of premium quality natural and engineered wood veneer species. Reclaim your environment with the holistic serenity of organic wood. TORGINOL® WOOD will enhance your environment with ecological simplicity. This innovative wood flooring solution combines the hygienic benefits of seamless flooring with nature’s elegant wood grains, sustaining a timeless appeal for the life of your floor.

PERFORMANCE SPECIFICATIONS

Color (Natural)	Visual Evaluation (ASTM D4086)	Pass
Dry Film Thickness	Micrometer (ASTM D1005)	6 - 8 mils
Shape	Visual Evaluation (ASTM D4086)	Random
Odor	Olfactory (ASTM D1296)	Odorless
Moisture Content (< 5%)	Moisture Meter (ASTM D4442)	Pass
Size Distribution (~3/8")	Normal Sieve Analysis (ASTM C136)	Pass

COVERAGE RATE GUIDELINES

Type	Size	Full Coverage
All	~ 3/8"	15 - 20 SF / LB

Coverage rates may vary depending on customer preferences and application techniques.

WOOD SPECIES



W1010 / HONEY MAPLE



W1015 / WINTER BIRCH



W1030 / WHITE OAK



W1090 / TOBACCO WALNUT



W2015 / AGED HICKORY



W2120 / BLACK OAK




W2140 / RUSTIC CHESTNUT



4617 South Taylor Drive
Sheboygan, WI 53081 | USA
(920) 694-4800
service@torginol.com | www.torginol.com

TYPICAL WOOD SYSTEM

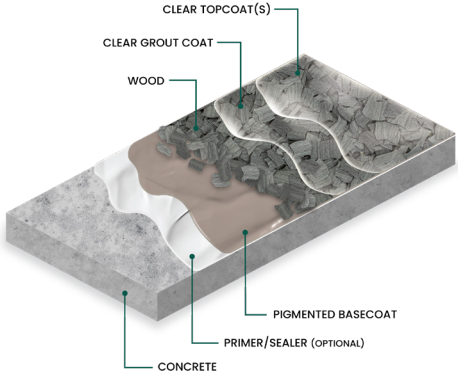

*For best results, a sanding coat is recommended prior to applying the final topcoat(s).

LIMITATIONS

A Natural Product

WOOD is a natural material and may not be uniform in appearance. Natural variations in the characteristics of individual pieces should not be considered defects. The color and grain variations contribute to the wood veneer’s unique character and beauty.

Aging and Light Exposure

Wood ages naturally over time as it is exposed to light and other environmental elements. Exposure to artificial lights or natural ultraviolet (UV) light can cause wood veneer to react in different ways.

Natural and lightly stained veneers tend to become darker, while darker stains tend to become lighter. Other natural veneers may yellow over time.

Continued exposure to direct sunlight causes veneer to age more dramatically and should be considered when planning the location of an installation.

Wood veneer should not be used in direct sunlight.

DISCLAIMER: The information set forth in this Product Data Sheet represents typical properties of the product described; the information and the typical values are not specifications. Torginol, Inc. makes no representation or warranty concerning the products, expressed or implied, by this Product Data Sheet.