

## GENERAL NOTES

Precast manhole units shall be manufactured in accordance with CSA A257 and ASTM C478

Precast concrete shall be exposure Class HSe and meet min compressive strength of 30MPA @28d

Air Category: 4.0% - 7.0% (except where zero-slump concrete is used)
Aggregate: CSA/CAN A23.4 Maximum Size: 20mm
Admixtures: CSA/CAN A23.4
Reinforcing: Grade 400W CSA G30.18,
312.0% 5.402.5


3x12 W2.5/W2.5

Inserts/Embeds: As noted in drawing details

Manufacture of precast concrete units shall be in accordance with specification CSA A23.4

\*\* LEKO PRECAST LTD SHALL NOT BE RESPONSIBLE FOR ANY INSTALLATION PRACTICES FOLLOWED ON—SITE UNLESS PERFORMED BY LEKO PRECAST LTD \*\*

830Kg (1,825 LBS)

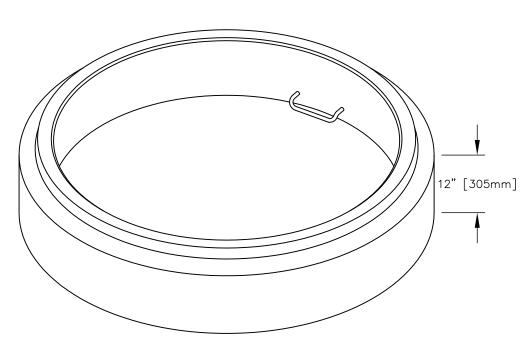



72" x 1ft (1830mm x 305mm) MANHOLE BARREL				
DRAWN BY: JA	CHECKED BY:	APPROVED BY:	DATE: MARCH 2017	
ASSEMBLY DWG.	PREVIOUS DWG.	DRAWING NO.		REVISION
SCALE: 1:20	  SOMETRIC: 1:20	M7201		3
DO NOT SCALE THIS DRAWING				