


**GENERAL NOTES**  
 Precast concrete shall be exposure Class S and meet min compressive strength of 35MPa  
 Cement: Type GU  
 Air Category: 4.0% - 7.0%  
 Aggregate: CSA/CAN A23.4 Maximum Size: 20mm  
 Admixtures: CSA/CAN A23.4  
 Reinforcing: Grade 400W CSA G30.18-09  
 Inserts/Embeds: As noted in drawing details  
 Manufacture of precast concrete units shall be in accordance with specification CSA A23.4  
 \*\* LEKO PRECAST LTD SHALL NOT BE RESPONSIBLE FOR ANY INSTALLATION PRACTICES FOLLOWED ON-SITE UNLESS PERFORMED BY LEKO PRECAST LTD \*\*

**ASSEMBLED HEIGHT TO:**  
 INLET: 1.545m (60-3/4")  
 OUTLET: 1.495m (58-3/4")  
 TOS: 1.965m (77-3/8")

**ASSEMBLED WEIGHT:**  
 LID: 3,045Kg (6,715lb)  
 CENTER: 4,721Kg (10,386lb)  
 BOTTOM: 4,100Kg (9,026lb)

**TOTAL WEIGHT: 11,866Kg (26,105lb)**

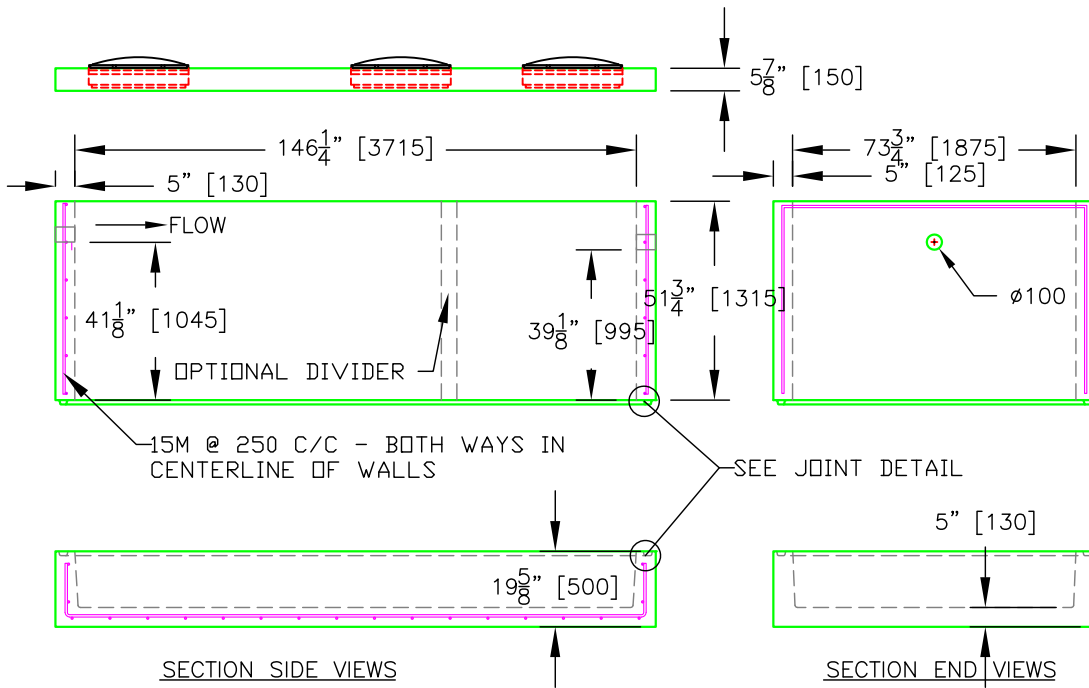

TOTAL VOLUME OF MIDDLE  
 6910 LITRES -OR-  
 1830 U.S. GALLONS

TOTAL VOLUME OF BOTTOM  
 2590 LITRES -OR-  
 685 U.S. GALLONS

**TOTAL APROX COMBINED VOLUME:**  
 APPROX. 9,500 LITRES  
 OR 2500 U.S. GALLONS (2110 iGAL)



**2500 US GAL TANK SINGLE COMPARTMENT**

DRAWN BY: JA	CHECKED BY:	APPROVED BY:	DATE: August 2016
ASSEMBLY DWG.	PREVIOUS DWG.	DRAWING NO. S0207B	REVISION 3
SCALE: 1:50	ISOMETRIC: N/A		
DO NOT SCALE THIS DRAWING			