



PEDESTAL TOP VIEW

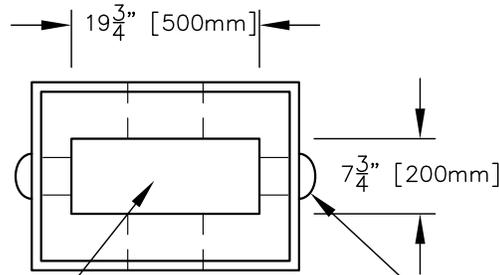

CONDUIT VOID

LIFTING CABLES

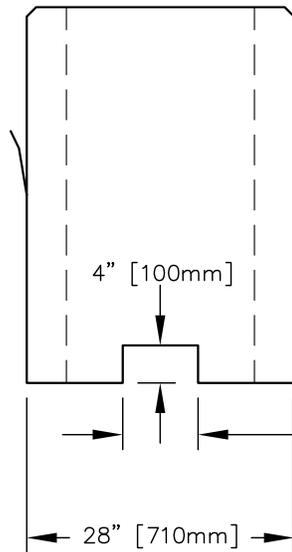


39 1/4" [1000mm]

4" [100mm]

7 3/4" [200mm]

28" [710mm]

PEDESTAL FRONT VIEW

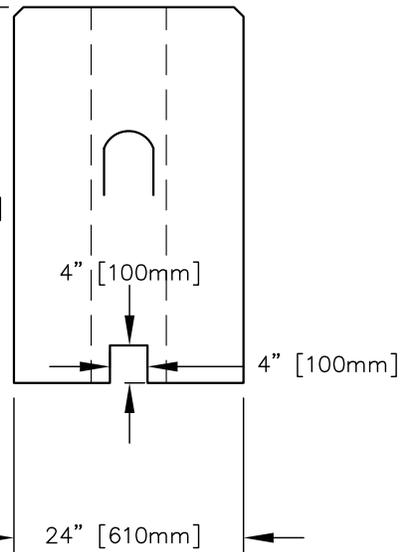

39 1/4" [1000mm]

4" [100mm]

4" [100mm]

24" [610mm]

PEDESTAL SIDE VIEW

GENERAL NOTES

Precast concrete shall be exposure Class HSe and meet min compressive strength of 30MPa @28d

Air Category: 4.0% - 7.0% (except where zero-slump concrete is used)
Aggregate: CSA/CAN A23.4 Maximum Size: 20mm

Admixtures: CSA/CAN A23.4
Reinforcing: Grade 400W CSA G30.18, 3x12 W2.5/W2.5
Inserts/Embeds: As noted in drawing details

Manufacture of precast concrete units shall be in accordance with specification CSA A23.4

** LEKO PRECAST LTD SHALL NOT BE RESPONSIBLE FOR ANY INSTALLATION PRACTICES FOLLOWED ON-SITE UNLESS PERFORMED BY LEKO PRECAST LTD **

600Kg (1300 LBS)



IRRIGATION PEDESTAL (Valid DSKA60-24)

DRAWN BY: JA	CHECKED BY:	APPROVED BY:	DATE: OCT 2022
ASSEMBLY DWG.	PREVIOUS DWG.	DRAWING NO. L2017b	REVISION 0
SCALE: 1:20	ISOMETRIC: 1:20	DO NOT SCALE THIS DRAWING	