


# TESTRONIX



## Regulated DC Power Supplies

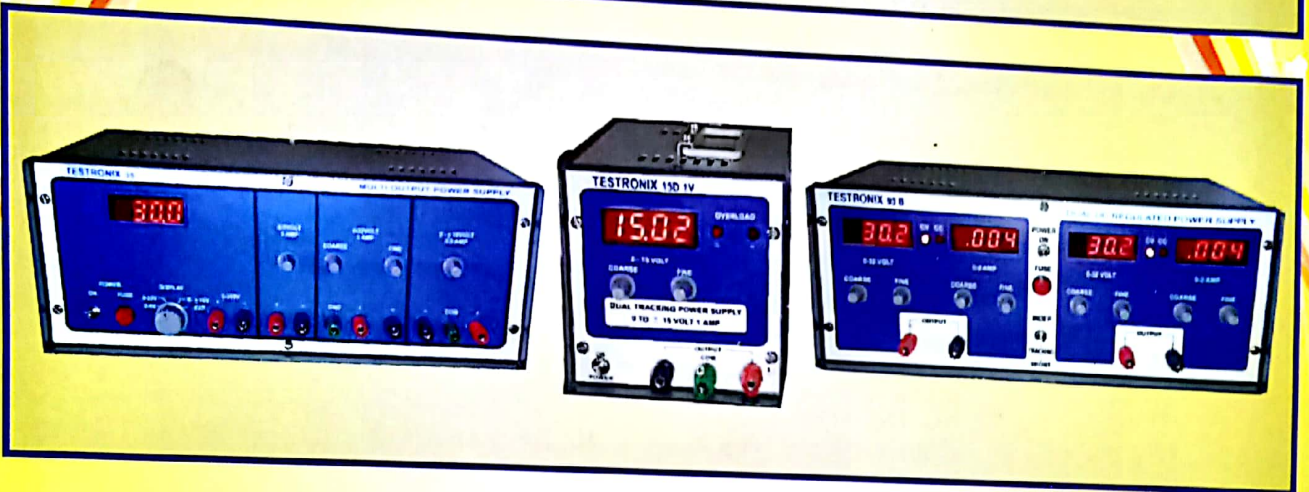

# SINGLE OUTPUT VARIABLE POWER SUPPLIERS

DC Output		MODEL No.	DISPLAY FOR VOLTS	DISPLAY FOR AMPS	SIZE IN MM H x W x D	WEIGHT IN KGS APPROX
VOLTS	AMPS					
0 - 5 V	0 - 2 A	30 B	3 Digit	3½ Digit	125 x 125 x 270	3.0
0 - 5 V	0 - 5 A	30 C	3 Digit	3 Digit	125 x 125 x 270	3.5
0 - 5 V	0 - 10 A	30 D	3 Digit	3½ Digit	135 x 195 x 270	5.5
0 - 16 V	0 - 2 A	34 B	3½ Digit	3½ Digit	125 x 125 x 270	3.5
0 - 16 V	0 - 5 A	34 C	3½ Digit	3 Digit	135 x 195 x 270	5.5
0 - 16 V	0 - 10 A	34 D	3½ Digit	3½ Digit	135 x 360 x 270	10
0 - 32 V	0 - 1 A	92 A	3 Digit	3½ Digit	125 x 125 x 270	3.5
0 - 32 V	0 - 2 A	92 B	3 Digit	3½ Digit	135 x 195 x 270	5.5
0 - 32 V	0 - 5 A	92 C	3 Digit	3 Digit	135 x 360 x 270	10
0 - 32 V	0 - 10 A	92 D	3 Digit	3½ Digit	255 x 255 x 300	14
0 - 65 V	0 - 1 A	36 A	3 Digit	3½ Digit	135 x 195 x 270	5
0 - 65 V	0 - 2 A	36 B	3 Digit	3½ Digit	135 x 195 x 270	5.5
0 - 65 V	0 - 5 A	36 C	3 Digit	3 Digit	255 x 255 x 300	14

## DUAL OUTPUT VARIABLE TRACKING FOUR DIGITAL METERS

0±16 V	0 - 2 A	35 B	3½ Digit	3½ Digit	135 x 245 x 270	6.5
0±32 V	0 - 2 A	93 B	3 Digit	3½ Digit	135 x 360 x 270	10
0±32 V	0 - 5 A	93 C	3 Digit	3 Digit	255 X 255 X 300	15

## DUAL OUTPUT VARIABLE TRACKING ONE DIGITAL METERS

0±15 V	1 A	15 D	3½ Digit	No	125 X 125 X 270	3.5
--------	-----	------	----------	----	-----------------	-----

### MULTI OUTPUT POWER SUPPLY

Testronix - 35

Output One : 0 to 5v - 5 AMP

Output Two : 0 to 32v - 2 AMP

Output Three : 0 to ±16v - 0.5 AMP

Size 135mm (H), 360mm (W), 270mm (D)

Weight 10 kgs approx.

### STANDARD SPECIFICATION OF POWER SUPPLY

Power Requirement - 230 V ± 10% Volts AC 50 HZ Power Consumption is 1.5 Time

Multipul of Maximum Voltage & Rating and Load Current drawn

Regulation : ±0.05% from no load to full load and for ±10 % variation in input main Voltage.

Ripples : Less then 3 mv RMS

Display : Accuracy ±0.5% ±2 Least Counts.

Standard Accessories : Test Leads and Instruction Manual.