

BT with Torrium®2 Home Pressure System

DAVEY

| OPERATING LIMITS | |
|--|----------|
| Capacities to | 45 gpm |
| Maximum total head to | 50 psi |
| Cut-in pressure – Adapts to 80% of last shut-off head pressure | |
| Cut-out flow rate | 0.26 GPM |
| Maximum liquid temperate (Torrium®2) | 158° F |
| Maximum ambient temperature (Torrium®2) | 120° F |
| Inlet size | 1¼" F |
| Outlet size | 1" M |
| Maximum pump casing pressure | 116 psi |
| Maximum system pressure | 100 psi |


| MATERIALS OF CONSTRUCTION | | |
|--------------------------------|---------------------------------|---|
| Part | Material | |
| Impellers | 304 stainless steel | |
| Lock nut | 304 stainless steel | |
| Pump casing | 304 stainless steel | |
| Pump backplate | 304 stainless steel | |
| Pump shaft | 316 stainless steel | |
| Neckrings | Teflon | |
| Seal ring (stationary) | Ceramic | |
| Seal ring (rotating) | Carbon (synthetic) | |
| Seal spring | 304 stainless steel | |
| Orings | Nitrile rubber | |
| Stage body | 304 stainless steel | |
| Torrium®2 check valve | Stem assembly Spring Seal | Nylon 304 stainless steel Nitrile |
| Torrium®2 body | Glass filled nylon | |
| Priming plug | 304 stainless steel | |
| Motor shell | Marine grade aluminum | |
| Lantern / DE endshield | Marine grade aluminum | |
| Shell & lantern bracket finish | Baked polyester | |

INSTALLATION AND PRIMING


- On installations with suction lifts a good quality foot valve should be installed
- The system is primed by filling the pump and suction line with water through the priming port, and replacing priming plug prior to switching on
- The PRIME button on the Torrium®2 unit should be held in while the pump is establishing prime



| Model | A | B | C | D | E | F | Inlet | Outlet | Net Weight (lbs) | G Hole Diameter @ Centres | |
|---------|-------|------|------|------|------|------|-------|--------|------------------|------------------------------|------|
| BT30-30 | 16.14 | 4.72 | 5.67 | 4.76 | 2.00 | 5.83 | 1¼" F | 1" M | 16.25 | 0.35 | 5.51 |

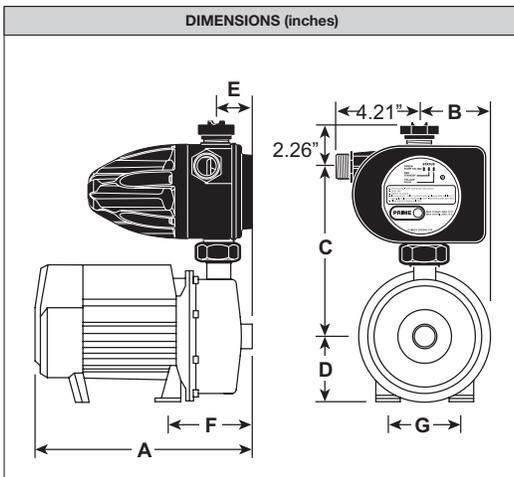

| ELECTRICAL DATA | |
|--------------------------|---------|
| Model | BT30-30 |
| Supply voltage/phase | 220V/1 |
| Supply frequency | 60hz |
| Input power (P1) (kW) | 1.44 |
| Output power (P2) (kW) | 1.12 |
| Full load current (A) | 7.00 |
| Locked rotor current (A) | 23.71 |
| Starting | PSC |
| Insulation class | Class F |
| Horsepower | 1.5hp |

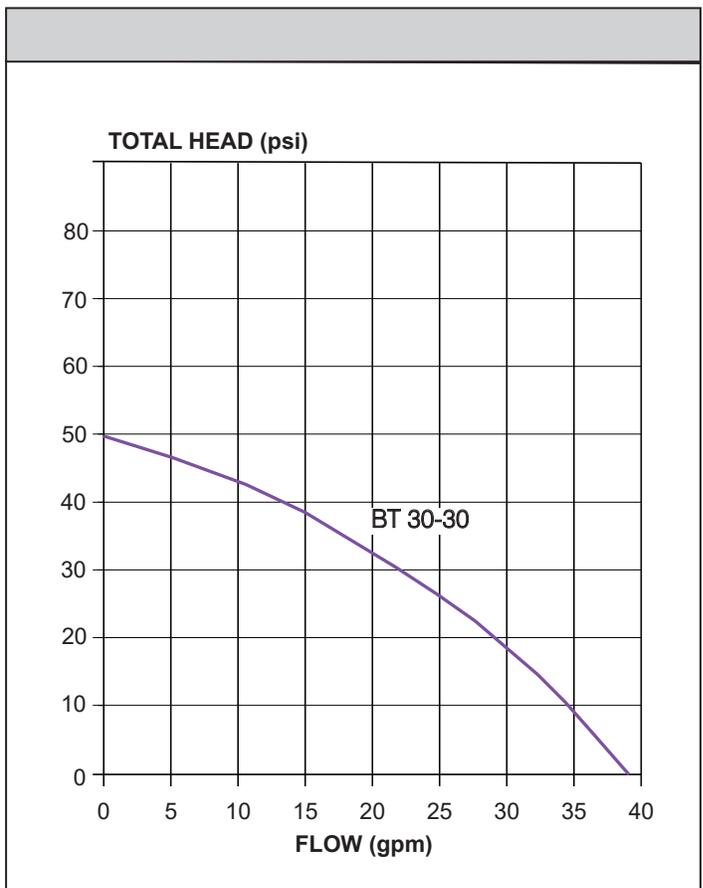

Add incoming pressure to maximum pump boost for shut off pressure.

DAVEY



BT 30-30



WHY CHOOSE THE DAVEY BT Home Pressure System?

WATER PRESSURE SYSTEM

The Davey BT booster pressure system consists of a robust centrifugal pump fitted with the intelligent Davey Torrium@2 water pressure controller to deliver boosted water pressure to your home or other application. Consumers can enjoy strong and seemingly constant water pressure due to Torrium@2's constant flow operation.

Due to large water pathways, Torrium@2 operates with a lower head loss than comparable water pressure controllers to provide superior hydraulic performance with less wasted energy.

TORRIUM@2 CONTROLLER

Pressure Boosting

Torrium@2 boosts low or fluctuating mains water pressure to give you strong, even water pressure for your comfort and convenience. Torrium@2 can also pressure boost water from rainwater tanks.

Constant Flow and Even Water Pressure

To prevent annoying fluctuations in water temperature during showers, Torrium@2 uses its intelligence to provide households with constant flow to provide even water pressure. It does this with its innovative pressure and flow sensors to start the pump on a pressure drop and to stop it on low flow (~0.26 gpm). This avoids pump cycling when there is continuing household demand for water.

Quick Cut-in for Even Pressure

To give you strong pressure right from the start, Torrium@2 is designed to cut in quickly when it senses demand for water. It cuts in when the pressure has dropped to 80% of the previous top (shut-off) pressure. Torrium@2 automatically sets this cut-in pressure each time the pump stops. In doing so, Torrium@2 automatically adapts to variations in pump performance or site conditions.

Economical, Quiet, Easy to Install

Efkay Sales

PH: 800-515-2021 • orders@efkaysales.com

www.EfkaySales.com