


High Speed Leak Detector

Model: D-P-1

- 150CM LENGTH* 80-140 CM HEIGHT (5' LENGTH * 31.5" – 55" HEIGHT)
- 20CM (8") WIDTH, PVC CONVEYOR BELT WITH SPEED CONTROL.
- DUAL MOTOR ELECTRICAL HEIGHT ADJUSTABILITY.
(INCLUDING 3 POSITIONS MEMORY)
- 2 GATE CYLINDERS (PROGRAMABLE).
- DOUBLE GUARDRAIL.
- HEIGHT MEASUREMENT SYSTEM.
- POSSIBILITY OF MULTIPLE TESTS BEFORE REJECTION.
- 2 REJECTION POSSIBILITIES. (AIR BLOW AND PNEUMATIC CYLINDER).
- REJECTION CONFIRMATION SYSTEM.
- DROPPED BOTTLE DETECTOR.
- EQUIPPED WITH VACUUM FAN.
- 4 VACUUM GATES ALONG THE CONVEYOR.
- KEYENCE LASER SENSOR
- USING BALL GRIP POSITIONING ARM FOR SENSOR'S MOUNTING BRACKET.
- EASY SETTING AND SELF-CHECK SYSTEM.
- EASY CONVEYOR REPLACEMENT.
- A HIGH SPEED OMRON PLC WITH 4 ANALOG CHANNELS.
- 5 INCHES TOUCH SCREEN HMI
- INCLUDE A WI-FI CAMERA WITH INTERNAL MEMORY.

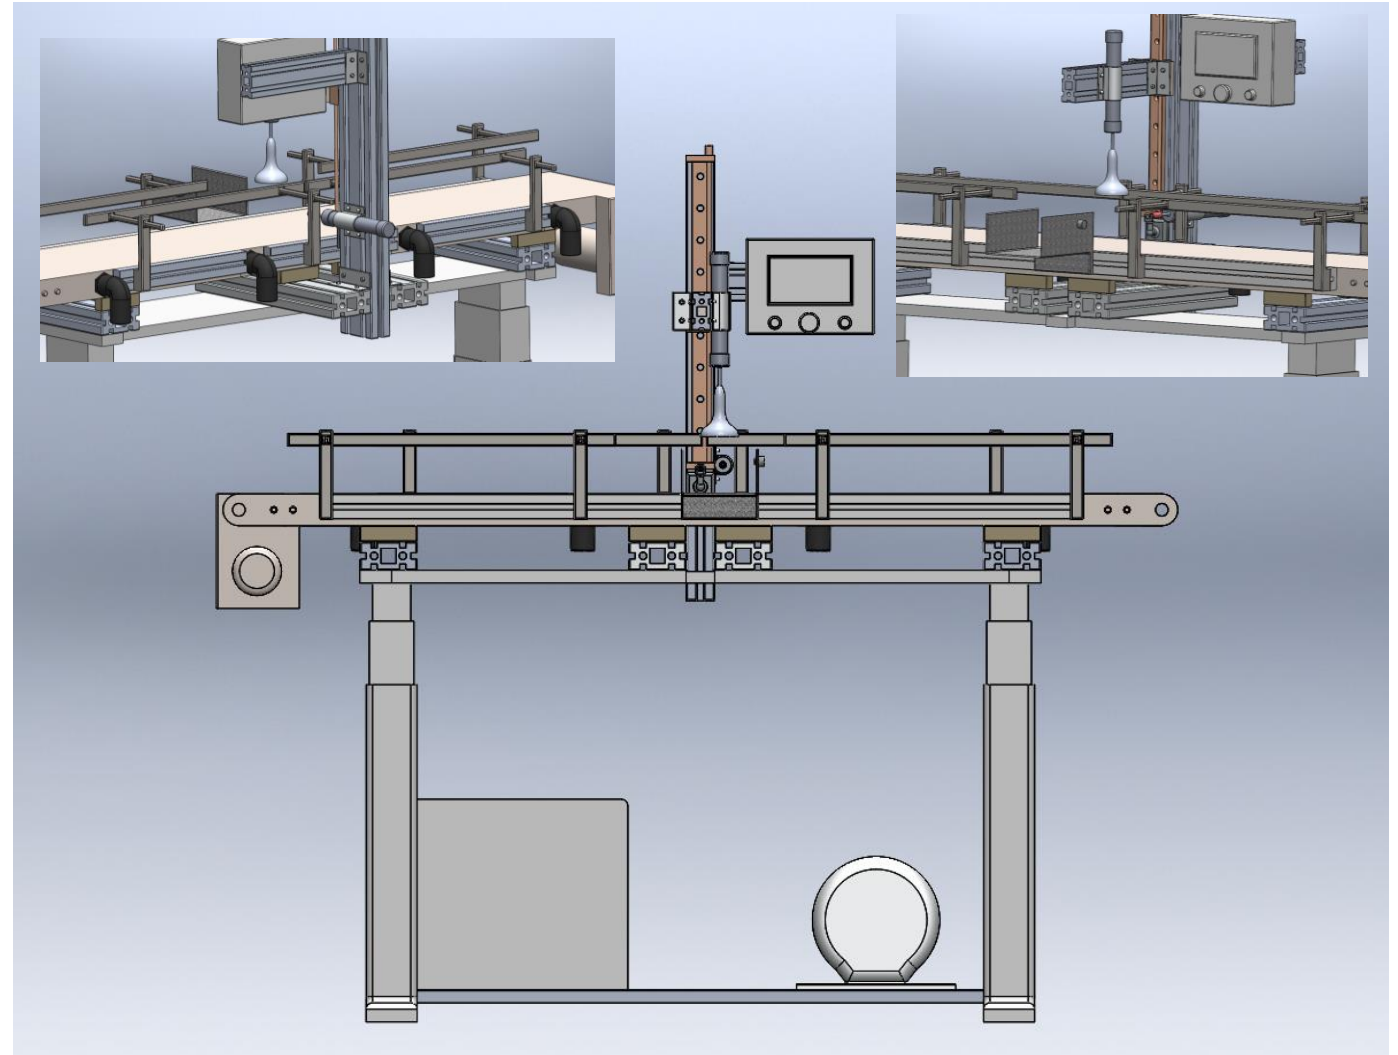

High Speed Leak Detector

Model: D-P-1

Bottle Height
measurement system




High-load and accurate
positioning slide



Keyence laser sensor



Dual Motor
Electrical Height
Adjustability.
(including 3
positions memory)

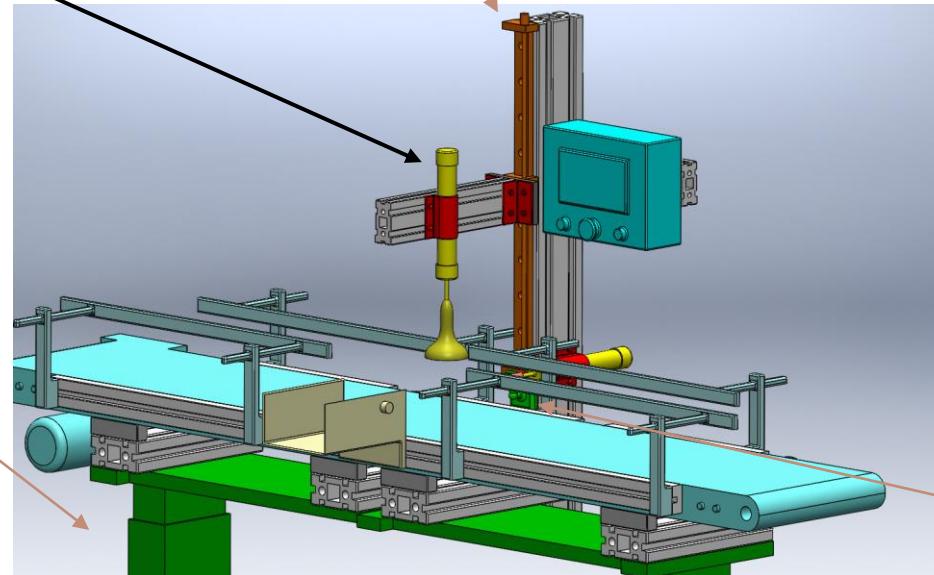

centrifugal
vacuum
blower



ball grip positioning
arm for sensor's
mounting bracket

