



VALENCIA















KEY ADVANTAGES

Recessed, trimless rectangle downlight for indoor use

High efficiency with 20W power and up to 900 lm output

Multiple CCT options: 2700K / 4000K / 6000K

High CRI ≥90 for excellent color rendering

Low glare (UGR <19) – suitable for workspaces

Long lifetime: 50,000 hours

Die-cast aluminium housing, powder-coated

Black reflector for optimal light distribution

Bridgelux LED chip with SDCM ≤ 3 consistency

5-year warranty

TYPES OF APPLICATION

- OFFICES & WORKSPACES
- RETAIL STORES & SHOWROOMS
- HOTELS & HOSPITALITY
- RESIDENTIAL SPACES
- CONFERENCE ROOMS & EDUCATIONAL SPACES















ROOMS & EDUCATIONAL

VALENCIA CHARACTERISTICS



GENERAL INFORMATION

Driver included	Yes
Туре	Indoor, recessed, trimless rectangle downlight
Housing	Die-cast aluminium, powder-coated white
Reflector	Black
IP Rating	IP20 (for indoor use only)
Warranty	5 years

ELECTRICAL INFORMATION

Driver	ON/OFF optional Dali
Power	20W
Rated Voltage	27-39V _{dc}
Rated Current	600mA
Input Voltage	AC 220-240 , 50Hz

LED PERFORMANCE


ССТ	2700K / 4000K / 6000K
CRI	>90 (high color rendering)
Lumen	800lm / 850lm / 900lm
Lifetime	50,000h
Consistency	50,000h SDCM ≤ 3


OPTIC

Beam Angle	24°
UGR	<19 (low glare, suitable for workspaces)

STANDARD VERSION

20W

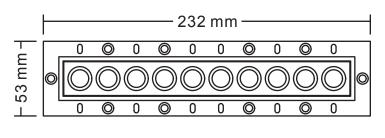



fluencesys.com LED Downlight |