
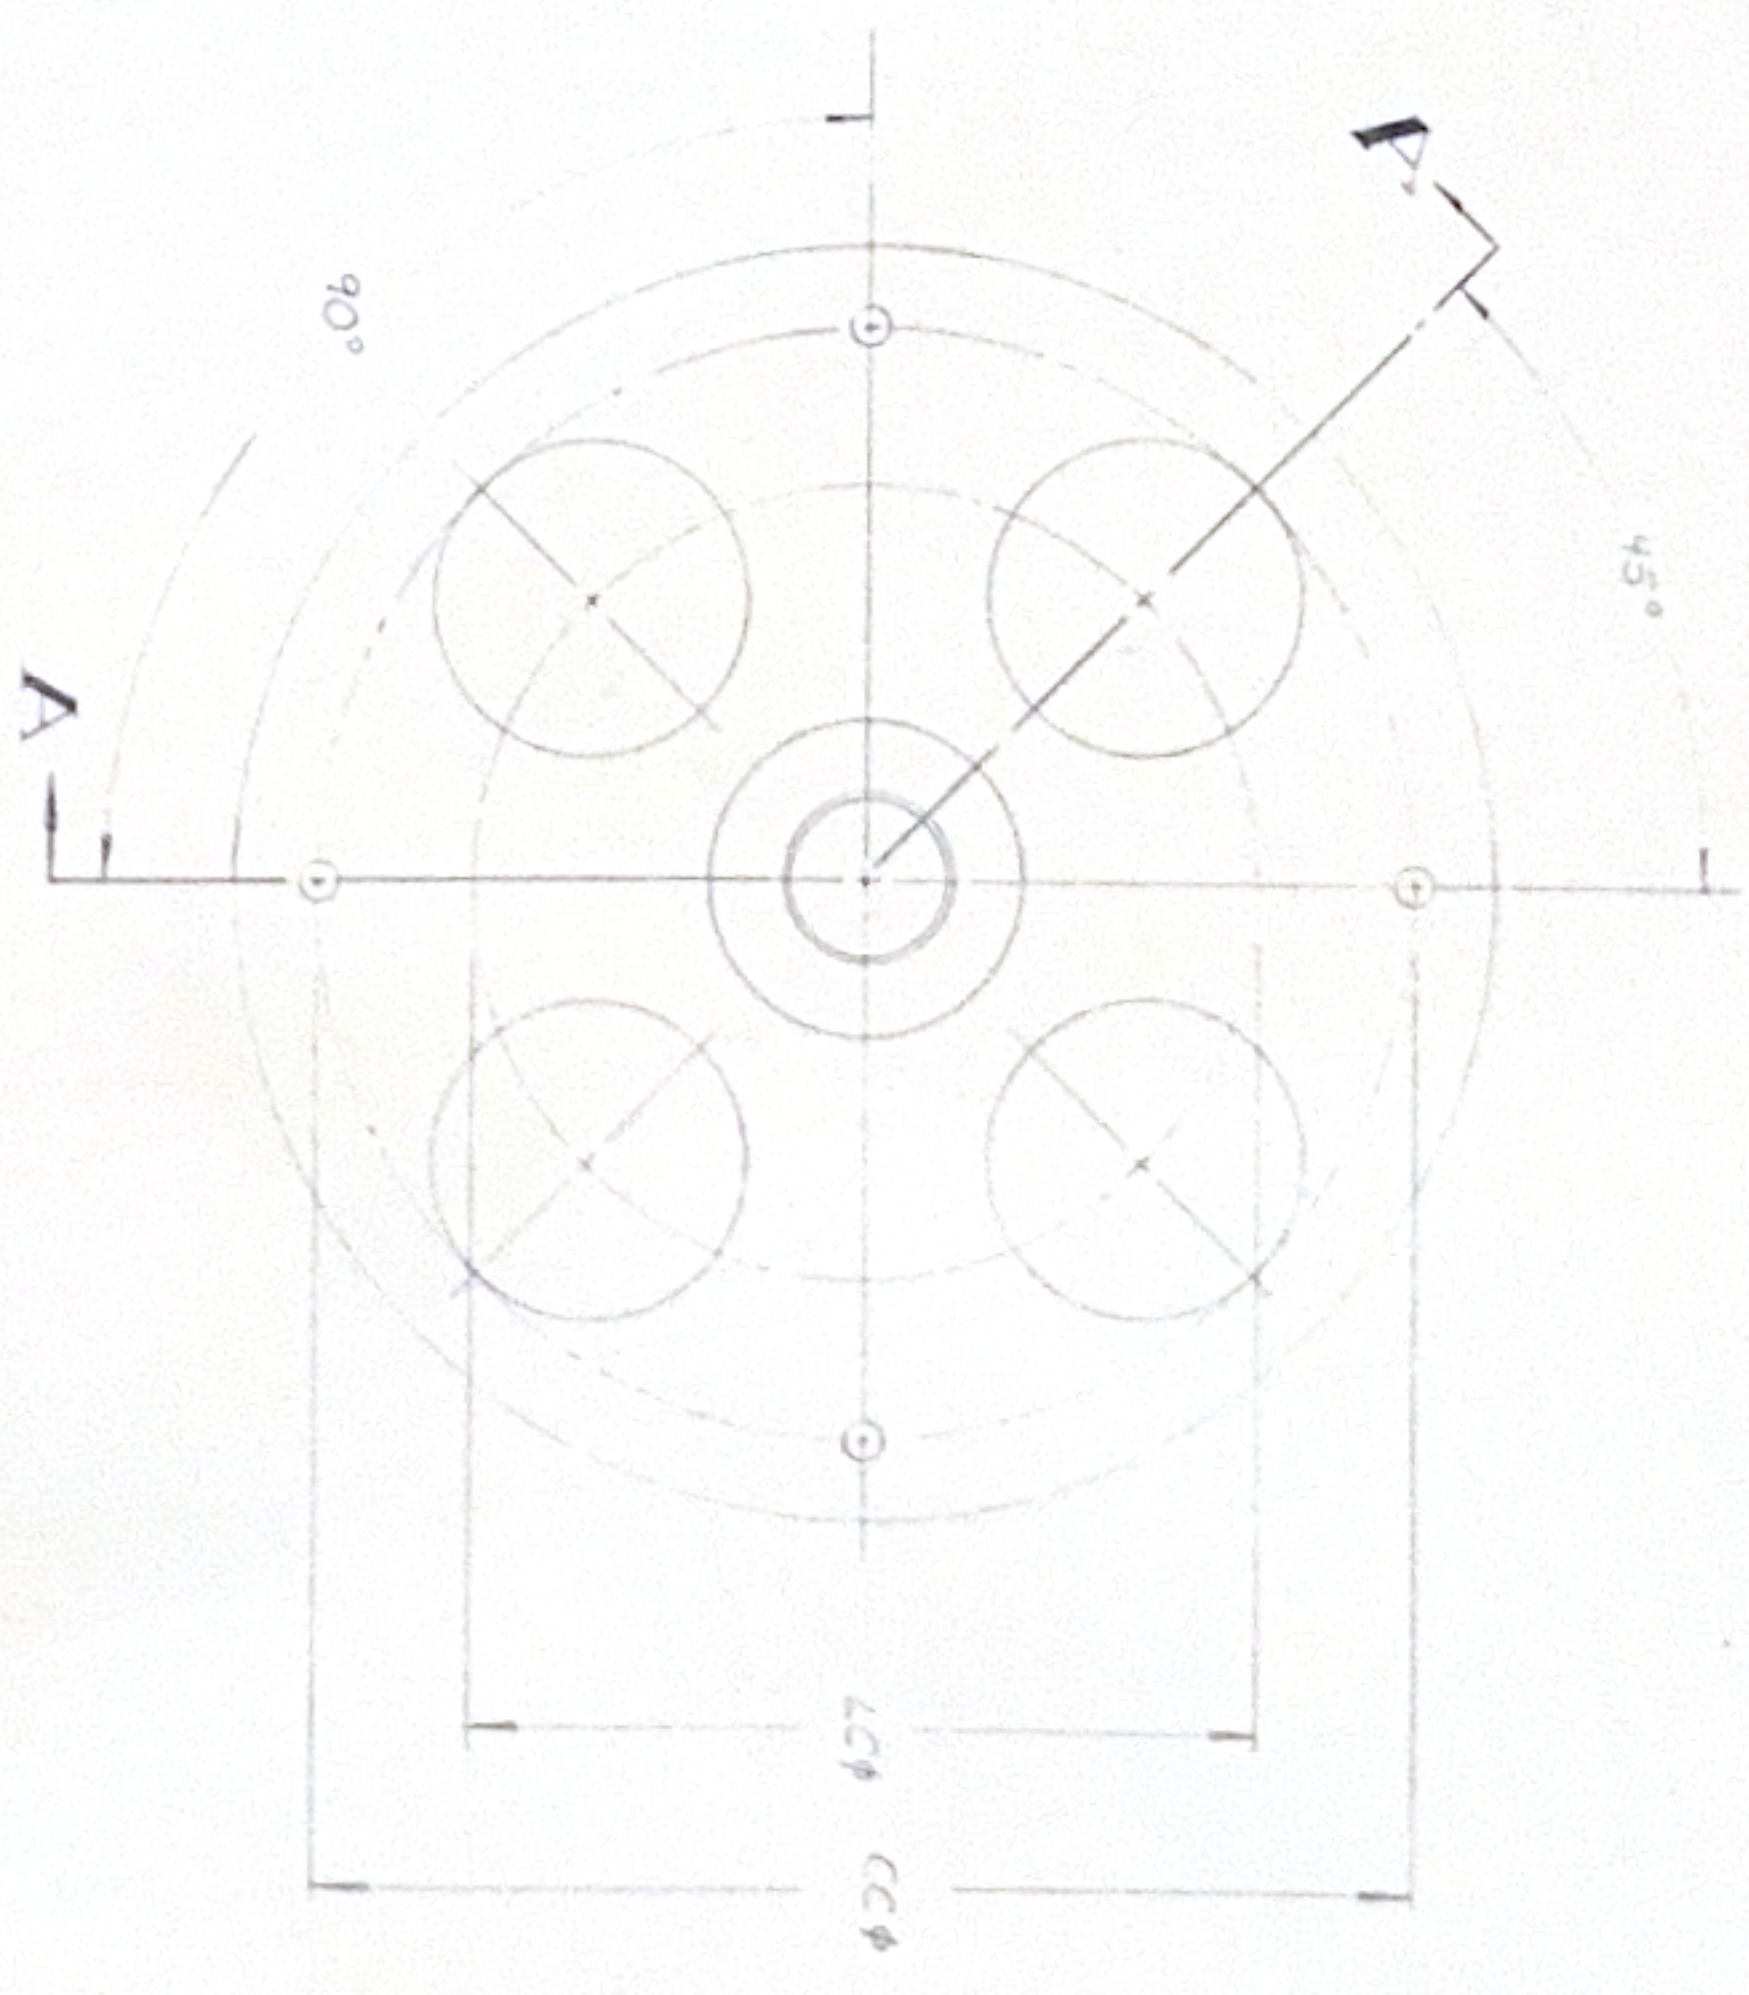


LETTER	DESCRIPTION	1	2	3	4	5	6	7	8	9	10
BR	BALL RADIUS	.3750									
CC	CONTROL CIRCLE Ø	.089									
CC	CONTROL CIRCLE	2.625									
FR	FLANG. RADIUS	.13									
FT	FLANG. THICKNESS	.125									
ID	INSIDE DIA.	.306									
IT	INSIDE Ø THICKNESS	.19									
LC	LIGHTENING Ø	.169									
LH	LIGHTEN. HOLE	.75									
OD	OUTSIDE DIA.	2.98									
RO	RADIUS OFFSET	+125									
SO	SOCKET OFFSET	.313									
SR	SOCKET RADIUS	.125									
T	THICKNESS (TOTAL)	.14									
Z	CHAMFER	.03									

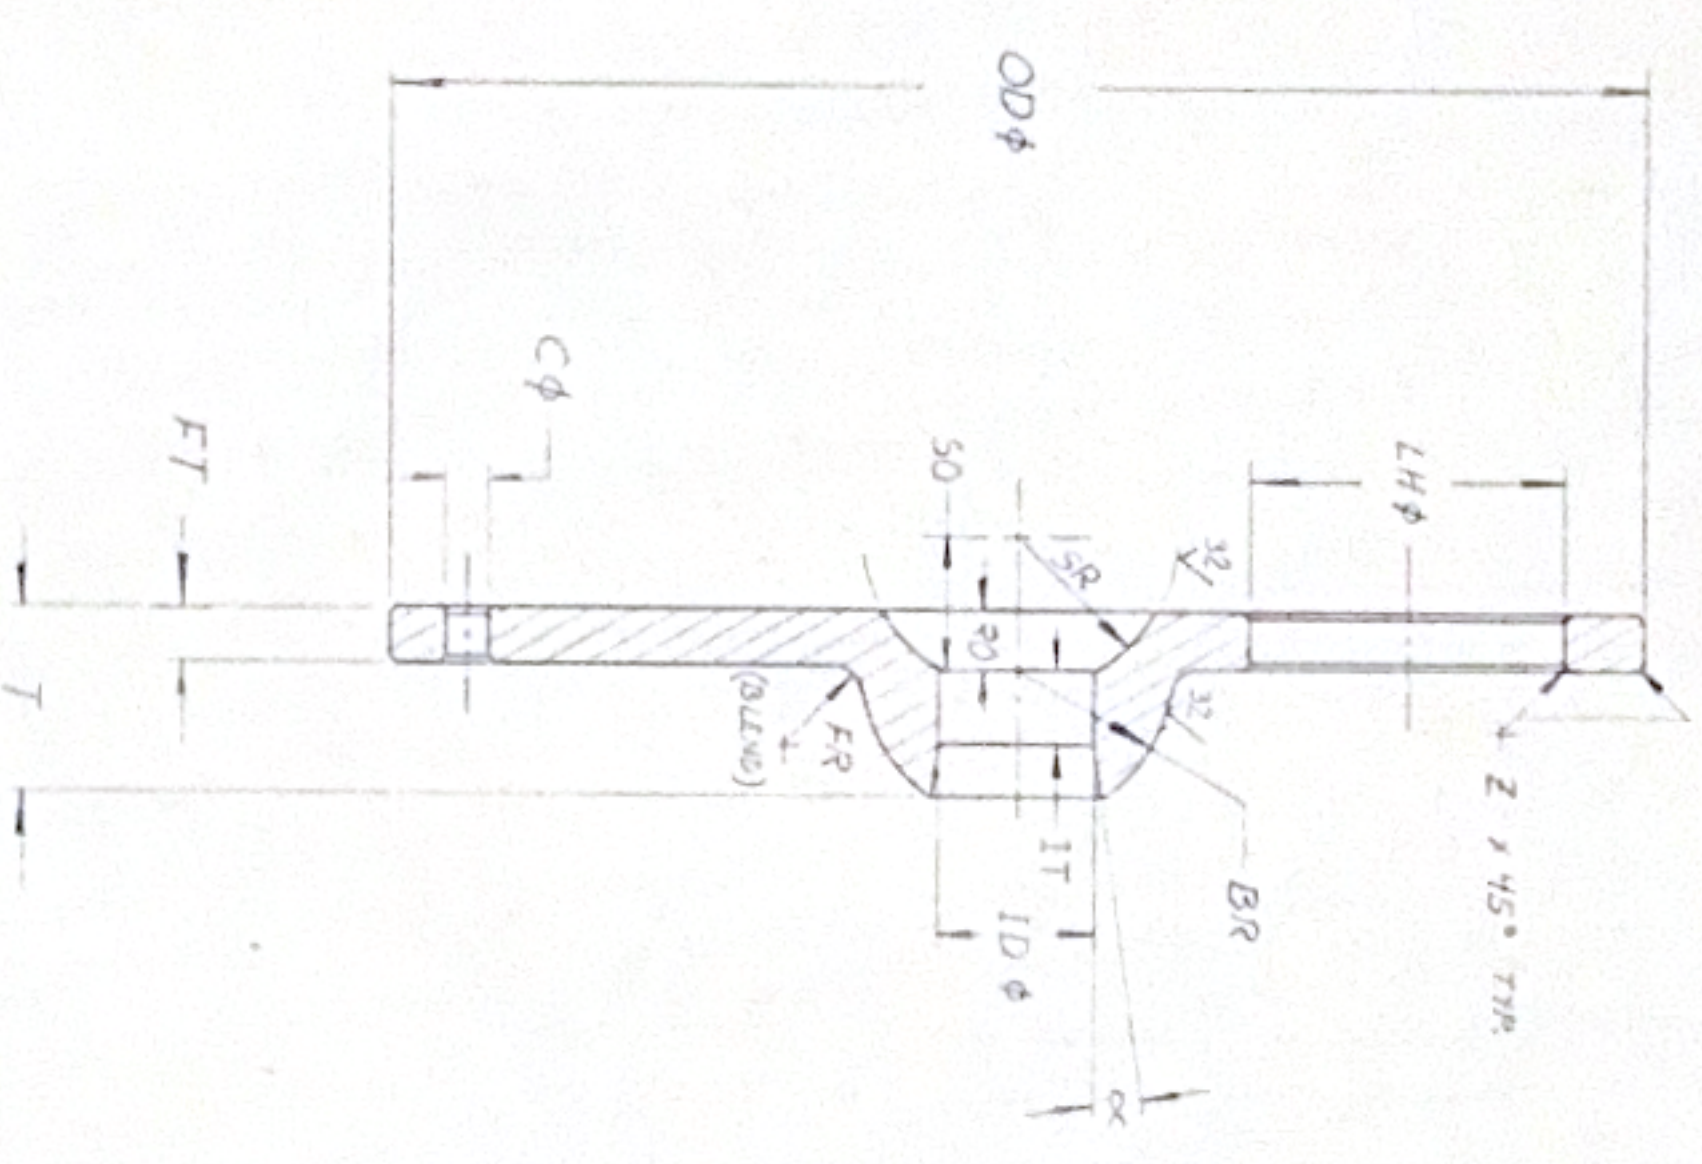

A-A
SECTION

MATL: DELRIN #250 (EXTRUDED),
COLOR: NATURAL

TOL:
XX ± .020
XX ± .010
XX ± .005
XX ± .001

TOLERANCES				REVISIONS				R.B. ROBOT CO.			
NO.	DATE	BY	REVISION	NO.	DATE	BY	REVISION	NO.	DATE	BY	REVISION
1	10/21/83	6/6		1	10/21/83	6/6		1	10/21/83	6/6	
2				2				2			
3				3				3			
4				4				4			
5				5				5			
6				6				6			
7				7				7			
8				8				8			
9				9				9			
10				10				10			