

Wall Mount Cabinet: 15U Double Section



DESCRIPTION


A complete enclosure featuring a tempered glass front door with locks, removable side and back access panels.

FEATURES

- 19" standard installation inside
- Double section structure
- Front door opens past 180 degrees
- Rear section and body opens to 120 degrees
- Built in Fan tray with 2 UL listed fans
- 6 Port Power distribution unit
- 2 network shelves
- Removable side doors
- Cable entry from top and bottom
- Secure Locking

APPROVAL

- ANSI/EIA Compliance
- RS-310-D Compliance
- IEC297-2 Compliance
- DIN41491: Part 1 Compliance
- DIN41494: Part 7 Compliance
- GB/T3047.2-92 Standard
- IP20 Protection Grade Rating

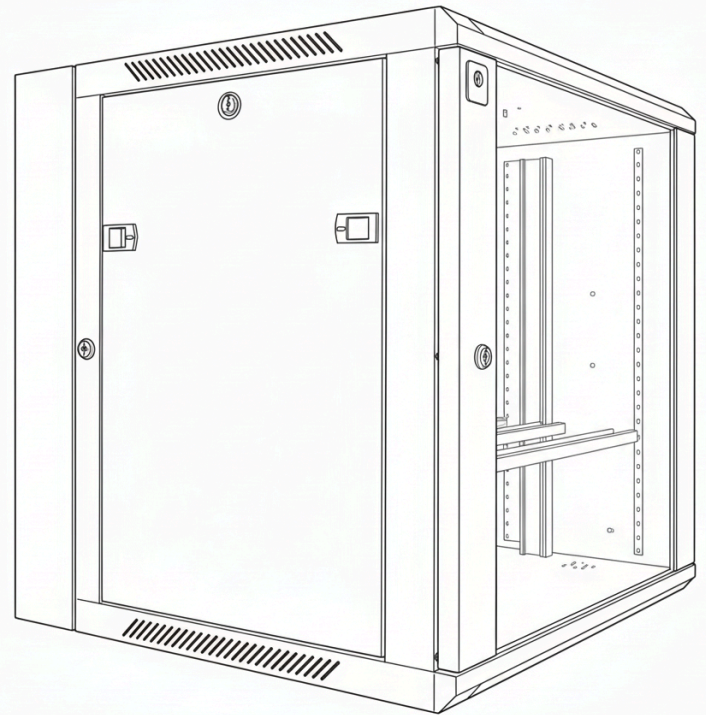

TECHNICAL DATA

Rack Height	15U
Material	SPCC 1.44 mm Cold Rolled Steel
Structure	Welded Steel Frame
Door	5mm Tempered Glass
Height	30.5 inches / 774.7 mm
Width	23.50 inches / 596.90 mm
Depth	24 inches / 609.60 mm
Mounting Depth	15.70 inches / 398.78 mm
Cable Entry	Top and Bottom
Power Distribution Unit	6 Port- 15 amp
Color	Powder Coated Black or White
Security	Locking Front Door and Panels
Static Load Capacity	75KG

BELLCOM TECHNOLOGIES

www.bellcomt.com