

DESCRIPTION

Bellcom 24-Port Blank Patch Panel is a 1 RMU rack-mount panel designed for modular keystone installations. The front pull-out keystone module blocks support easy labeling, access and organized structured cabling management.

KEY FEATURES


- Universal 19 in. rack/cabinet mounting standard
- Durable cold-rolled steel panel with black powder coating
- Includes integral label holder with clear window
- High capacity housing for up to 24 keystone modules
- Supports up to 24 optical fibers using SC SX adapters or 48 optical fibers using LC DX adapters
- Front-retractable keystone-module blocks with toolless mechanism
- Efficient rear cable management compatibility; cable management accessories sold separately
- Weight: 0.63 lb (0.3 kg) without keystone modules

APPLICATIONS

- Telecommunication rooms and network cabinets
- Structured cabling systems
- Copper keystone module terminations
- Optical fiber adapter mounting
- Commercial LAN and data center installations

PRODUCT SUMMARY

Property	Specification
Product Type	Blank Rack-Mount Patch Panel
Form Factor	1 RMU / 24-Position
Mounting Standard	19 in. rack/cabinet mounting
Panel Material	0.06 in. (1.5 mm) 16-GA CRS
Finish	Black powder coating, RAL 9005
Adapter Orientation	Key / Latch Up
Module Blocks	Front-retractable, toolless mechanism
SKU	BC-BPP24

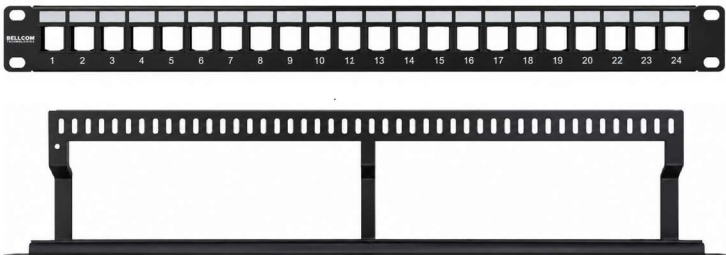


CONSTRUCTION & CHARACTERISTICS

Component	Property	Specification
Form Factor	Mounting Standard	19 in. rack/cabinet mounting standard (EIA-ECA-310-E)
Adapter Orientation	Orientation	Key / Latch Up
Keystone Module Blocks	Mechanism	Front-retractable, patented toolless mechanism
Panel	Material	0.06 in. (1.5 mm) 16-GA CRS
Panel	Finish	Black powder coating, RAL 9005 jet black
Blocks	Material	High-impact-resistant polycarbonate (PC) resin, UL94V-0
Labeling	Holder	Integral to keystone-module block with clear window
Labeling	Medium	Plain-paper inserts with factory-preprinted position numbers

DIMENSIONS

Property	Specification
Height	1.75 in. (44.5 mm) [1 RMU]
Width	19 in. (485 mm)
Depth	3.75 in. (95 mm)
Weight	0.63 lb (0.3 kg) without keystone modules

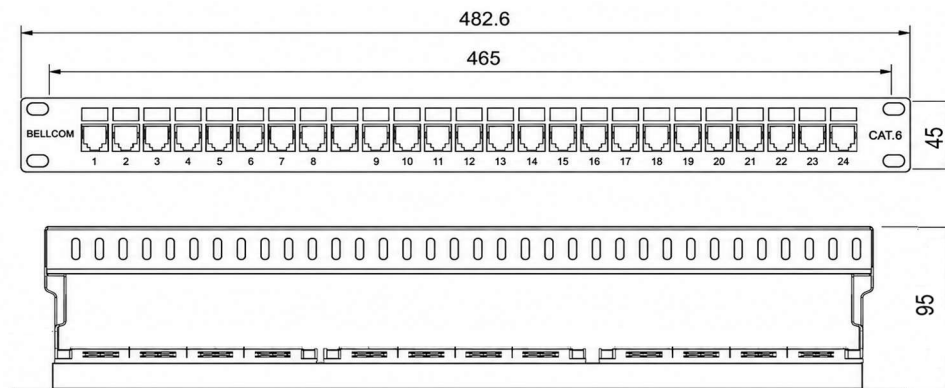

ENVIRONMENTAL & INSTALLATION

Property	Specification
Operating Temperature	-20°C to +70°C (-4°F to +158°F)
Operating Humidity	≤ 95% RH, non-condensing
Rack Mounting	USCU fasteners: #10-32, #12-24 screws and nylon washers included

COMPATIBLE ACCESSORIES

- Cable management bar, general purpose, 3 in. deep
- Cable management bar, optical fiber, 3 in. deep
- Cable management bar, general purpose, 4 in. deep
- Cable management bar, optical fiber, 4 in. deep
- Compatible with keystone inserts for optical fiber and twisted-pair systems

ORDERING INFORMATION

SKU	Product Description
BC-BPP24	24-Port Blank Patch Panel, 1 RMU, 19 in. rack-mount, black

Keystone modules and cable management accessories should be selected separately according to project requirements.

STANDARDS & COMPLIANCE

- 19 in. rack/cabinet mounting standard: EIA-ECA-310-E
- UL94V-0 rated high-impact-resistant polycarbonate module blocks
- Black powder coating finish: RAL 9005 jet black
- Designed for modular copper and fiber structured cabling installations