

DESCRIPTION

Bellcom LC/UPC-to-SC/UPC duplex fiber optic patch cords are high-speed 10 Gigabit OM3 multimode assemblies built with 50/125 μm fiber and a low-smoke zero-halogen jacket. LC and SC connectors provide snap-in connectivity for high-density fiber panels, SFP modules, and XFP transceivers.

KEY FEATURES

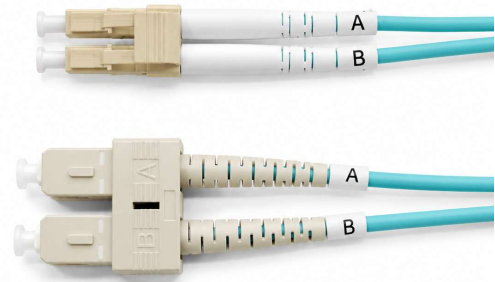
- OM3 50/125 μm multimode fiber for high-speed 10 Gigabit networks
- Duplex LC/UPC and SC/UPC connectors factory terminated at both ends
- Typical insertion loss of ≤ 0.20 dB and maximum insertion loss of ≤ 0.30 dB
- Low-smoke zero-halogen (LSZH) jacket material
- Snap-in LC and SC connectors support quick, reliable installation
- Available in various lengths

APPLICATIONS

- Data centers and enterprise fiber networks
- SFP and XFP transceiver interconnections
- High-density fiber patch panels and distribution units
- LAN / WAN backbone and equipment patching
- 10 Gigabit Ethernet multimode links

PRODUCT SUMMARY

Property	Specification
Product Type	Fiber Optic Duplex Patch Cord
Fiber Mode	OM3 Multimode
Core / Cladding	50/125 μm
Connector A	LC/UPC Duplex
Connector B	SC/UPC Duplex
Jacket	LSZH
Network Rating	10 Gigabit
SKU	BL-LUSU-OM3N

**CONSTRUCTION & CHARACTERISTICS**

Component	Property	Specification
Fiber	Classification	OM3 Multimode
Fiber	Core / Cladding	50/125 μm
Fiber	Configuration	Duplex
Cable	Network Application	High-speed 10 Gigabit multimode links
Connector	End A	LC duplex
Connector	End B	SC duplex
Connector	Polish	UPC
Connector	Format	Snap-in
Jacket	Material	LSZH
Availability	Length	Various
Testing	Geometry	Interferometer inspection
Testing	Optical	Automated insertion loss and reflection testing
Performance	Typical Insertion Loss	≤ 0.20 dB
Performance	Maximum Insertion Loss	≤ 0.30 dB
Compatibility	Interfaces	SFP modules and XFP transceivers
Compliance	Listings	UL Listed (Canada and US); RoHS compliant

CONNECTOR & CABLE CONFIGURATION

Parameter	Configuration
Connector End A	LC/UPC Duplex
Connector End B	SC/UPC Duplex
Fiber	OM3 50/125 μm Multimode
Cable	Duplex
Jacket	LSZH
Availability	Various lengths

Both ends are factory terminated with duplex LC/UPC and SC/UPC connectors. The snap-in format supports high-density patching and plug-and-play interconnection to LC and SC adapter panels, SFP modules, and XFP transceivers.

OPTICAL / TECHNICAL PERFORMANCE

Property	Specification
Fiber Classification	OM3 multimode
Core / Cladding Size	50/125 µm
Connector Configuration	LC/UPC duplex to SC/UPC duplex
Network Capability	10 Gigabit multimode
Typical Insertion Loss	≤ 0.20 dB
Maximum Insertion Loss	≤ 0.30 dB
Jacket Material	LSZH
Quality Control	Interferometer inspection and automated optical testing

INSTALLATION & COMPATIBILITY

Application / System	Configuration	Compatibility	Notes
Data Center Switching	SFP transceiver	Supported	Equipment interconnection
XFP Transceiver Links	LC or SC duplex	Supported	Plug-and-play connection
High-Density Patch Panels	LC or SC adapter ports	Supported	Small-form-factor connectivity
10 Gigabit Ethernet	OM3 50/125 µm	Supported	Multimode network links
LAN / WAN Backbones	Duplex fiber	Supported	Network backbone patching
Telecommunications	LC-to-SC	Supported	Equipment patching
Server & Storage Networks	OM3 duplex	Supported	High-speed optical links
Fiber Distribution Units	LC or SC adapter	Supported	Rack-mounted distribution
Premise Networks	LSZH jacket	Supported	Indoor installations where required
Custom Assemblies	Various lengths	Available	Confirm at time of order

Insertion-loss values are based on the source product specification. Final installed-link performance depends on the complete channel, adapters, and connected equipment.

STANDARDS & APPROVALS

- UL Listed in Canada and the United States
- RoHS compliant
- OM3 50/125 µm multimode fiber
- LC/UPC to SC/UPC duplex connectors
- Low-smoke zero-halogen (LSZH) jacket
- Interferometer geometry inspection
- Automated insertion loss and reflection testing

ORDERING INFORMATION

SKU	Product Description
BL-LUSU-OM3N	LC/UPC-to-SC/UPC OM3 Duplex Fiber Optic Patch Cord, 50/125 µm, LSZH

Available in various lengths. Confirm the required length at time of order.