CLIPSO° so different Stretch Ceilings & Walls Technical Data

CLIPSO® ceiling & wall coverings provide a perfectly smooth and uniform surface. Installation is fast, easy, and clean, without pollution or odors. CLIPSO coverings are made of a polyester knit coated with polyurethane. Thanks to high-tech profiles, CLIPSO can create walls and ceilings with intricate designs and complex shapes.

The CLIPSO System

1. CLIPSO PVC-free Coverings (polyurethane-coated polyester knit)



705S Standard 705C Color 495D Acoustic

495AC Acoustic Color 495AT Acoustic Translucent 307-8-9 T Translucent

705AB-AS Fabric Guard

2. Profiles (or Tracks) more than 18 different profiles to fit every need







Panels and

Lightboxes





Frames





► Widths of up to 16'8"

Highly customizable

► Acoustic optimization

NRC values up to 1.05

Backlighting available

odorless installation

ISO9001 Certification

► 10-year warranty

Class A fire rating

▶ PVC and VOC free

► Environmentally friendly

Water and dirt repellent

Antistatic and antibacterial

Quick, clean, cold, dry, waste-free &

► Printable, paintable & washable



1. Attach Profiles 2. Tuck Fabric 3. Stretch and Trim

Applications



Suspended Clouds

Ceilings






Partitions



CLIPSO Acoustic Polyester Stretch Ceiling Fabric Specifications:

- Wide Span Polyester Acoustic Fabric (Colors to be chosen by Interior Design Team)
- Polyester Knitted Fabric Coated with Polyurethane (495D/705A)
- Noise Reduction Coefficient 0f 0.016 (thickness)
- Track System Thickness of 3/8"
- Stretch Fabric System shall not deflect fixtures in RCP
- Material Width Specification 16' 8"
- Fabric Shall be Humidity Resistant
- Fabric Shall Hold no less than a 10 year guarantee
- Acoustic Stretch Fabric System To Cover Entire Drywall Ceiling with the exception of **Decorative Beams**

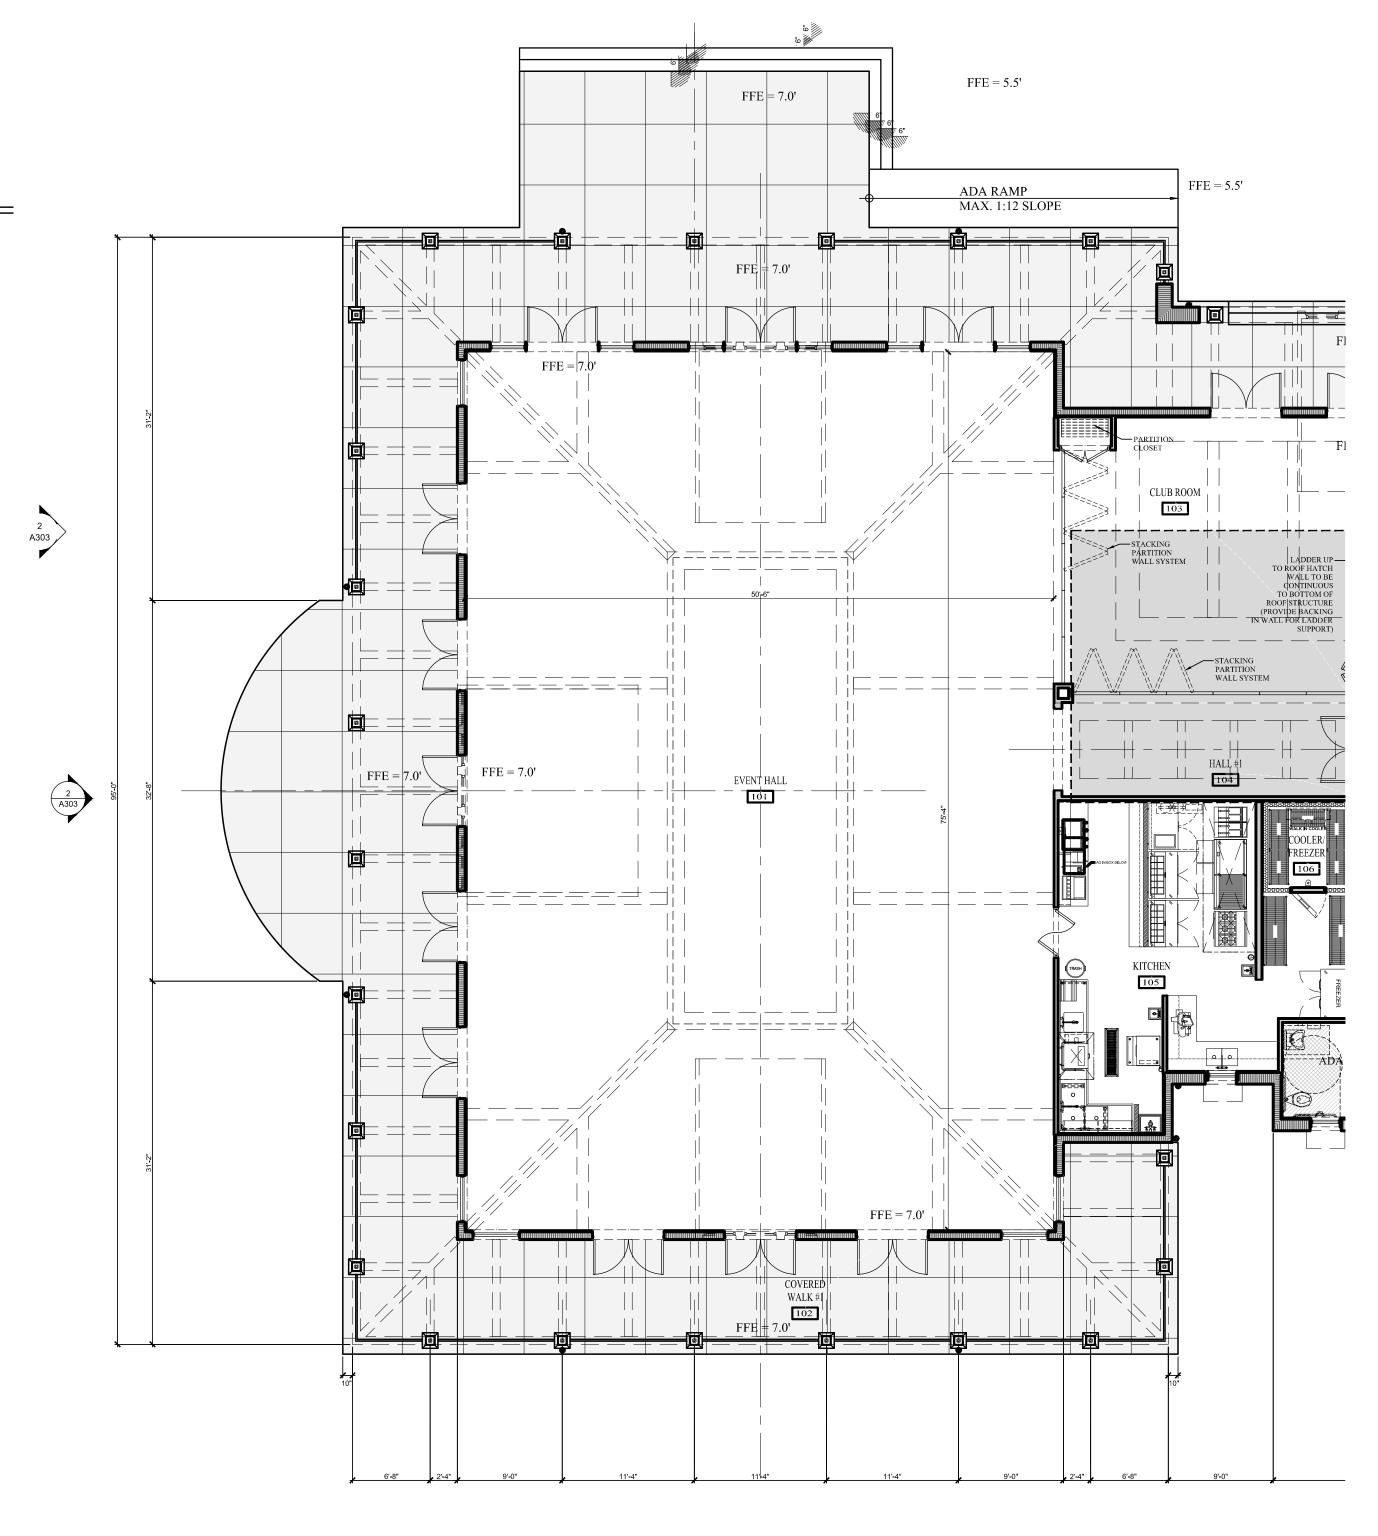



pecificat coustic Ceilling 3/8"

ACOUSTICS