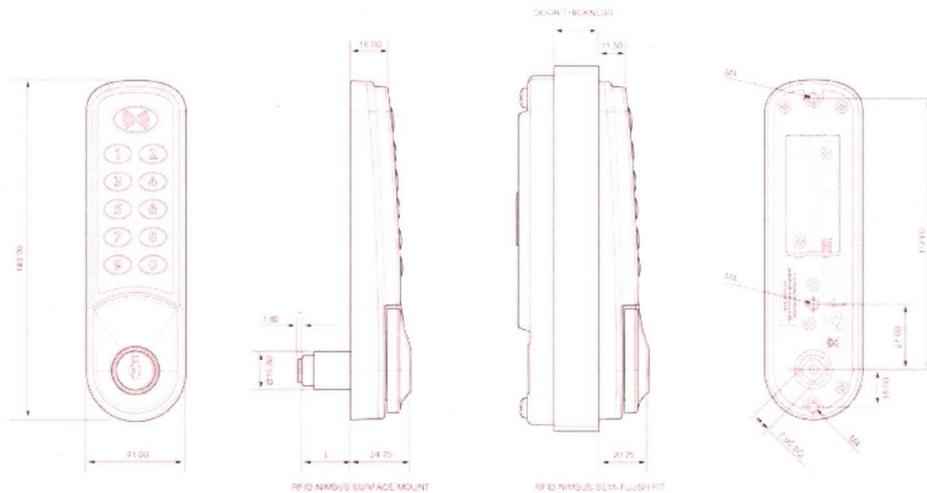# Nimbus RFID Digital Combination Lock

RFID NIMBUS SURFACE MOUNT

RFID NIMBUS SEMI-FLUSH FIT

Product ID: 3963

Standard Features

- Choice of RFID card or keypad use
- Black, silver or white as standard
- Chrome and brushed nickel finishes available on request
- Surface mount and semi-flush fit mounting options (maximum 20mm protrusion)
- Steel override key
- Two or three-point installation
- Wide variety of cams
- LED indicator lights
- Optional audible keypad
- Battery condition indicator

- 8-digit master code
- 6-digit sub-master code
- 4 or 6-digit user code
- Private or public user modes
- Default 24mm spindle length
- Technician mode
- 2 x AAA batteries (included)
- Up to 50,000 cycles per pair of batteries
- Vertical, left and right hand keypads
- Multiple incorrect code timed lock-out protection
- High, normal or low speed detection mode

Programming Features

- Change master card
- Add user card (private mode only)
- Set private mode
- Set public mode
- Set audio

Optional Features

- Available with Remote Allocation System (RAS)
- One or two time RAS mode
- Alternative colors
- Pre-programmed modes and codes
- Customized logo

L&F A Lowe & Fletcher Group Company