




2024 SLi Collection

Table of Contents

SLi5400		PG1
SLi5200		PG2
SLi4500		PG3
SLi4000		PG4
SLi3000		PG5-6
Sli2000		PG7-8
SLi1010		PG9
SLi1000		PG10
Product F	eatures Cross References	PG11-12
Terms &	Conditions	PG13
Warranty	,	PG14

SLi 5400

ONE PIECE INTELLIGENT TOILET

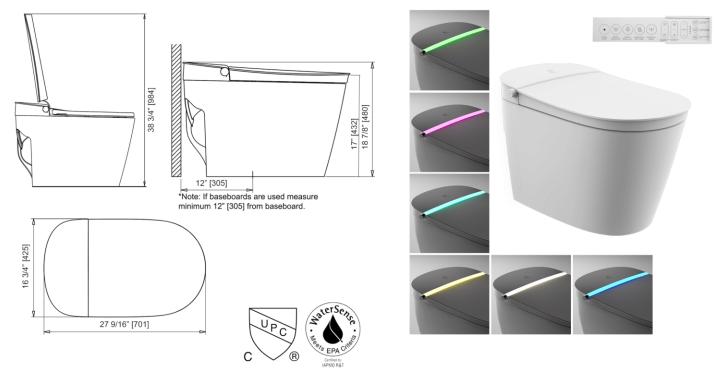

Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In Adjustable Water Temperature (5 Levels)

Floor mounted/ Siphonic Instantly Warm Water Temperature
Elongated Bowl Shape Adjustable Shower and Massaging
ADA Height Toilet Bowl Adjustable Self-Warming Seat (5 Levels)

Pump Operated Programmable User Profiles

Auto Flush Feature

Automated Hands-Free Seat and Lid

Rear/Lady Wash

Warm Air Dryer

Automated Hands-Free Seat and Lid

Micro Shield™ Antibacterial Glaze

ABS Scratch Resistant Seat Lid

Deodorizer Removable SS Wand for Cleaning Customizable LED Light Bar

Codes/Standards


ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®

Details

The SLi5400 Toilet features sharp geometric curves while conveying a modern style. Our SLi5400 Intelligent Toilet is equipped with a fully customizable LED light bar, bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.

SLi 5200

ONE PIECE INTELLIGENT TOILET

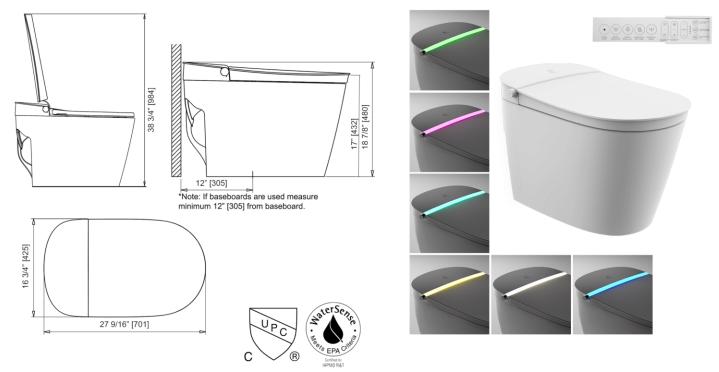

Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In Adjustable Water Temperature (3 Levels)

Floor mounted/ Siphonic
Elongated Bowl Shape
ADA Height Toilet Bowl
Pump Operated
Adjustable Shower and Massaging
Adjustable Self-Warming Seat (3 Levels)
Removable SS Wand for Cleaning
Auto Flush Feature
Micro Shield™ Antibacterial Coating

Rear/Lady Wash

ABS Scratch Resistant Seat Lid

Warm Air Dryer

Customizable LED light bar

Deodorizer

Codes/Standards

ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®


Details

The SLi5200 Toilet features sharp geometric curves while conveying a modern style. Our SLi5200 Intelligent Toilet is equipped with a fully customizable LED light bar, bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.

SLi 4500

ONE PIECE INTELLIGENT TOILET



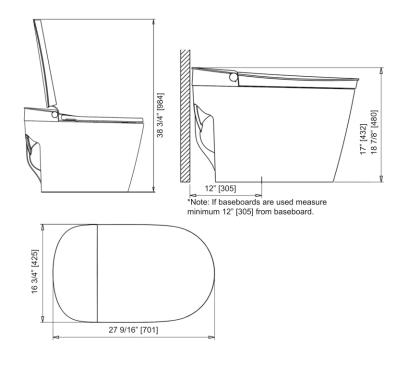



Rear/Lady Wash

Warm Air Dryer

Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In Adjustable Water Temperature (5 Levels)

Floor mounted/ Siphonic Instantly Warm Water Temperature Elongated Bowl Shape Adjustable Shower and Massaging

Auto Flush Feature Automated Hands-Free Seat and Lid ABS Scratch Resistant Seat Lid Micro Shield™ Antibacterial Glaze

Removable SS Wand for Cleaning

Elongated Bowl Shape Adjustable Shower and Massaging Deodorizer ADA Height Toilet Bowl Adjustable Self-Warming Seat (5 Levels) Fragrant Foam Barrier Pump Operated Programmable User Profiles

Codes/Standards

ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®


Details

The SLi 4000 Toilet features sharp geometric curves while conveying a modern style. Our SLi 4000 Intelligent Toilet is equipped with a bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.

SLi 4000

ONE PIECE INTELLIGENT TOILET



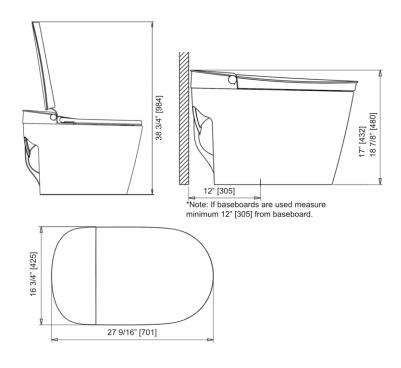



Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In Adjustable Water Temperature (5 Levels)

Floor mounted/ Siphonic Instantly Warm Water Temperature
Elongated Bowl Shape Adjustable Shower and Massaging
ADA Height Toilet Bowl Adjustable Self-Warming Seat (5 Levels)

Pump Operated Programmable User Profiles

Auto Flush FeatureAutomated Hands-Free Seat and LidRear/Lady WashMicro Shield™ Antibacterial GlazeWarm Air DryerABS Scratch Resistant Seat LidDeodorizerRemovable SS Wand for Cleaning

Codes/Standards

ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®


Details

The SLi 4000 Toilet features sharp geometric curves while conveying a modern style. Our SLi 4000 Intelligent Toilet is equipped with a bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.



SLi 3000

ONE PIECE INTELLIGENT TOILET

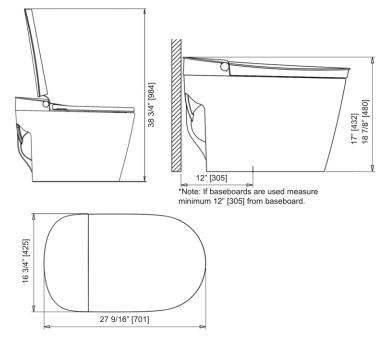



Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In Adjustable Water Temperature (3 Levels)

Floor mounted/ Siphonic

Elongated Bowl Shape

ADA Height Toilet Bowl

Pump Operated

Adjustable Shower and Massaging

Adjustable Self-Warming Seat (3 Levels)

Removeable SS Wand for Cleaning

Auto Flush Feature

Micro Shield™ Antibacterial Glaze

Auto Flush Feature Micro Shield™ Antibacterial Glaze Rear/Lady Wash ABS Scratch Resistant Seat Lid

Warm Air Dryer Deordorizer

Codes/Standards

ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®


Details

The SLi 3000 Toilet features sharp geometric curves while conveying a modern style. Our SLi 3000 Intelligent Toilet is equipped with a bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.



SLi 2000

ONE PIECE INTELLIGENT TOILET

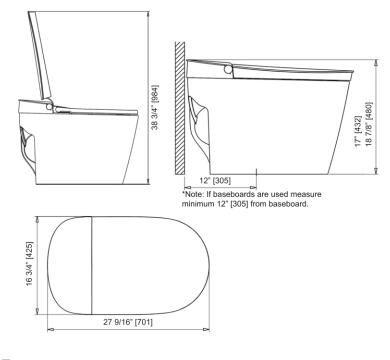



Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In Adjustable Water Temperature (3 Levels)

Floor mounted/ Siphonic Instantly Warm Water Temperature
Elongated Bowl Shape Adjustable Shower and Massaging
ADA Height Toilet Bowl Adjustable Self-Warming Seat (3 Levels)

Pump Operated

Auto Flush Feature

Rear/Lady Wash

Adjustable Sell-Warning Seat (3 Level
Removable SS Wand for Cleaning
Micro Shield™ Antibacterial Coating
ABS Scratch Resistant Seat Lid

Warm Air Dryer Deodorizer

Codes/Standards


ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®

Details

The SLi 2000 Toilet features sharp geometric curves while conveying a modern style. Our SLi 2000 Intelligent Toilet is equipped with a bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.

SLi 1010

ONE PIECE TANKLESS TOILET

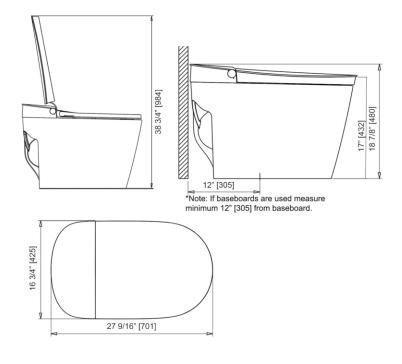





Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial Glaze

Color White

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In ON/OFF Heated seat (Electrical Outlet

Floor mounted/ Siphonic Required)

Elongated Bowl Shape Integrated Night Light

ADA Height Toilet Bowl Battery Operated Pump Auto Flush Feature

Micro Shield™ Antibacterial Glaze ABS Scratch Resistant Seat Lid

Codes/Standards


ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®

Details

The SLi1010 Toilet features sharp geometric curves while conveying a modern style. Our SLi1010 Tankless Toilet is newly upgraded with an integrated night light and a heat seated. The SLi1010 is equipped with a bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.

SLi 1000

ONE PIECE TANKLESS TOILET

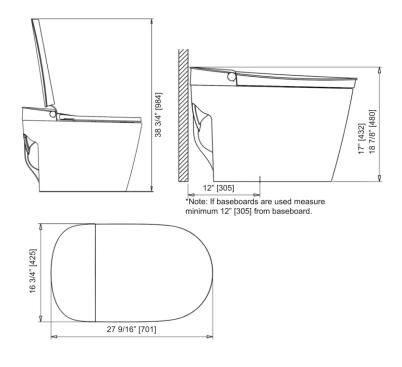





Features

Dimensions L 27 9/16" x W 16 3/4"x H 18 7/8"

Weight 110 lbs (50 kg)

Material Finish Vitreous China, ABS Scratch Resistant Lid and Micro Shield™ Antibacterial

Color Glaze

Water Consumption Siphon Jet Rimless Dual Flush 1.28/1.0 GPF (4.8/3.8 LPF)

Configuration 12" Rough In

Floor mounted/ Siphonic Elongated Bowl Shape ADA Height Toilet Bowl Battery Operated Pump Auto Flush Feature

Micro Shield™ Antibacterial Glaze ABS Scratch Resistant Seat Lid

Codes/Standards

ASME A112.19.2-2013/CSA B45.1-13, ASSE 1002
PREMIUM High-Efficiency toilet (HET)
MAP RATING HIGHLY RECOMMENDED FLUSH PERFORMANCE
EPA WaterSense®

Details

The SLi1000 Toilet features sharp geometric curves while conveying a modern style. Our SLi1000 Intelligent Toilet is equipped with a bottom inlet, vertical outlet, dual flush, Micro Shield™ Antibacterial glaze, a silent seat and 12" rough-in dimension.

PRODUCT FEATURES

FEATURES	Sli 5400	Sli 5200	Sli 4500	Sli 4000
Rear/Lady Wash	Yes	Yes	Yes	Yes
Dual Flush	Yes	Yes	Yes	Yes
Adjustable Water temperature	Yes (5 Levels)	Yes (3 Levels)	Yes (5 Levels)	Yes (5 Levels)
Warm Water	Yes	Yes	Yes	Yes
Adjustable Flow Rate	Yes	Yes	Yes	Yes
Adjsutable Spray Arm Position	Yes	Yes	Yes	Yes
Oscillating Spray	Yes	Yes	Yes	Yes
Pulsating Spray	Yes	Yes	Yes	Yes
Air Dryer	Yes	Yes	Yes	Yes
Pre-Wet (Bowl Surface Pre-wash)	Yes	Yes	Yes	Yes
Heated Seat	Yes	Yes	Yes	Yes
Temperature Control Heated Seat	Yes (5 Levels)	Yes (3 Levels)	Yes (5 Levels)	Yes (5 Levels)
Deoderizer	Yes	Yes	Yes	Yes
		100		
Night Light	Yes	Yes	Yes	Yes
Night Light Programmable User Profiles			Yes Yes	Yes Yes
	Yes	Yes		
Programmable User Profiles	Yes Yes	Yes Yes	Yes	Yes
Programmable User Profiles Removeable Wand for Cleaning	Yes Yes Yes	Yes Yes Yes	Yes Yes	Yes Yes
Programmable User Profiles Removeable Wand for Cleaning Auto Lid/Seat Open and Close	Yes Yes Yes	Yes Yes Yes Yes	Yes Yes Yes	Yes Yes Yes
Programmable User Profiles Removeable Wand for Cleaning Auto Lid/Seat Open and Close Remote Control	Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes	Yes Yes Yes	Yes Yes Yes
Programmable User Profiles Removeable Wand for Cleaning Auto Lid/Seat Open and Close Remote Control Auto Flush	Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes
Programmable User Profiles Removeable Wand for Cleaning Auto Lid/Seat Open and Close Remote Control Auto Flush ABS Scratch Resistant Lid	Yes Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes Yes Yes Yes

Sli 3000	Sli 2000	Sli 1010	Sli 1000
Yes	Yes	No	No
Yes	Yes	Yes	Yes
Yes (3 Levels)	Yes (3 Levels)	No	No
Yes	Yes	No	No
Yes	Yes	No	No
Yes	Yes	No	No
Yes	Yes	No	No
Yes	Yes	No	No
Yes	Yes	No	No
Yes	Yes	Yes	Yes
Yes	Yes	Yes	No
Yes (3Levels)	Yes (3Levels)	Yes	No
Yes	Yes	No	No
Yes	Yes	Yes	Yes
No	No	No	No
Yes	Yes	No	No
No (Remote Only)	No (Remote Only)	No	No
Yes	Yes	No	No
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
No	No	No	No
No	No	No	No

TERMS & CONDITIONS

This order form is not an offer to sell to any person who possesses, nor to anyone else, the products listed here at the prices shown. All prices are in U.S. dollars. These prices do not include freight, shipping and or handling.

TERMS AND CONDITIONS OF SALE

Buyer's acceptance of all or partial goods ordered from seller shall constitute buyer's acceptance of STUDIOLUX's terms and conditions of sale set forth on order confirmation or invoice unless buyer objects in writing prior to acceptance of said goods.

CREDIT APPROVAL

Acceptance of orders, shipments, deliveries and performance of work shall at all times be subject to approval of the Seller's Credit Department, STUDIOLUX, Irvine, California. Seller may at any time decline an order or decline to make any shipment or delivery or perform any work except upon receipt of payment, or security, or upon terms and conditions satisfactory to such department. Seller reserves the right to ship C.O.D. or C.I.A.

TERMS OF PAYMENT

Cash payment terms are Net 30 Days. A delinquency charge, 1.5% per month or 18% per year, computed on the unpaid balance shall be due as liquidated damages on all accounts not paid in full when due. Interest shall be paid with Buyer's next remittance. In addition to late payment charges, Buyer agrees to pay any and all collection costs, including reasonable attorney fees incurred by Seller in collecting balances not paid within terms.

FREIGHT

All orders are FOB California Warehouse. Seller reserves the right to ship merchandise by the method of seller's choosing.

SHIPPING WEIGHTS

Shipping weights are approximate and are not guaranteed, but are shown for customer convenience.

RETURNED MERCHANDISE

Merchandise which has been shipped according to Buyer's specifications cannot be returned for credit without prior written approval from the seller, fully establishing the basis for the credit. Credit will be issued only for items which are found by seller to be of standard manufacture and in saleable condition. Return shipment is at buyer's expense and risk. Buyer must prepay freight and will incur up to a 45% restocking charge when no manufacturing defects or errors are involved. Discontinued merchandise will not be accepted under this return goods program. No merchandise will be accepted for return under this policy after 30 days.

DAMAGE IN TRANSIT/SHORTAGE

Every reasonable precaution is taken against breakage or damage in transit. Seller's risk of loss ceases at the time the goods are placed at the Buyer's disposal. Claims against carriers are to be filed by the Buyer within 7 days. It is the buyer's responsibility to inspect products upon delivery for transit and/or shortage. If damage or shortage is detected, it should be duly noted on the bill of lading before signing for merchandise. An inspection report should be requested by the buyer of the carrier, followed by a settlement claim to the carrier.

WARRANTY

See STUDIOLUX's product warranty for details. If you do not have a copy of the product warranty, please request in writing to: STUDIOLUX
3 Musick

Irvine, CA 92618

DESIGN CHANGES

Seller reserves the right to make revisions without notice in the design of its products and packaging.

DELAY

If any shipping dates have been specified, they are approximate and seller shall not be bound thereby, but every effort will be made to ship in accordance with them. All shipments are subject to contingencies of manufacturer and other causes beyond seller's control such as fires, strikes, delays in transportation, or government regulations.

VITREOUS CHINA & FINE FIRE CLAY WARRANTY

STUDIOLUX Limited Warranty

Limited Warranty applies to all STUDIOLUX products.

STUDIOLUX warrants its products to be free of manufacturing defects in material and workmanship for a period of 5 years on Vitreous China and 3 year on tank trim / seats and from the date of purchase. Please visit http://eepurl.com/gdt5fX to register within 30 days after purchase. The limited warranty is to the original purchaser only. The limited warranty is not transferable to any third party. The limited warranty applies to all products sold in the United States and Canada. STUDIOLUX is not responsible for any installation costs.

STUDIOLUX will at its election replace or make appropriate adjustments where STUDIOLUX inspection discloses any such defects occurring in normal residential usage within one year after purchase.

This warranty does not apply to the following items

- Damage or loss sustained in a fire, earthquake, storm or any natural disaster etc....
- Damage or loss resulting from any unreasonable use, misuse, abuse, negligence or improper care, improper cleaning or maintaining of the product.
- Damage or loss resulting from any sediments or foreign matter contained in the water system
- Damage or loss from improper installation, harsh environment, improper removal and water pressure in excess of 80 PSI.
- Damage or loss resulting from electrical surges, lightning strikes or other acts which are not considered normal or the fault of STUDIOLUX.
- Damage or loss resulting from normal wear and tear, such as gloss reduction or dulling, scratching or fading over time due to normal use, cleaning practices, water or atmospheric conditions including but not limited to: bleach, alkali, acid cleaners, dry powdered cleaners or any other abrasive cleaning agents or abrasive cleaning tools or aids.
- The use of any product in a manner outside of the product instructions / owner's manuals
- STUDIOLUX shall not be liable for any failure caused by Chloramines in the public treated waters or cleaners containing chlorine (calcium hypochlorite). Please Note that use of high concentrate chlorine or chlorine related products can damage fittings. This damage can cause leakage resulting in property damage.

This limited warranty gives you specific legal rights. You may have other rights which may vary from state to state, province to province or country to country

To obtain warranty service you may contact STUDIOLUX through your dealer, plumbing contractor or by writing STUDIOLUX, Attn. customer service department, 3 Musick, Irvine, California 92618 or by calling 1-800-769-4857.

IMPLIED WARRANTIES, INCLUDING THAT OF MERCHANTABILITY, ARE EXPRESSLY LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. STUDIOLUX DISCLAIMS ANY RESPONSIBILITY FOR CONSEQUENTIAL DAMAGES.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of special, incidental or consequential damages, so this limitation and exclusion may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state to state.

Vitreous China and Fine Fire Clay - Care

Clean the outside surface of your toilet or lavatory with mild soap and warm water. Wipe the entire surface completely dry with a clean soft cloth. You may use soft abrasive cleaners when necessary to clean your vitreous china and fine fire clay product. Do not use strong abrasive cleaners, as they will scratch and dull the surface. Wipe any splashes of cleaning solutions from plastic or plated surfaces immediately. Use toilet bowl cleaners on the inside of the toilet bowl only.

If the surface becomes excessively dirty, use a general purpose cleaner such as Fantastick®, All Purpose Lysol®, Basin Tub and Tile Cleaner®, Soft Scrub® Multi Surface, Scrub Free® Disinfectant Bathroom Cleaner, Clorox Clean-Up®, Spic and Span Liquid, Comet® Liquid Bathroom Cleaner, Scrubbing Bubbles® Bathroom Cleaner, BarKeeper's Friend ®, or Bon Ami.

Over time, hard water deposits may clog the toilet rim washing holes and trap ways. To clean, use a commercial cleaner that is recommended for removing hard water deposits. Be sure to follow the cleaner's manufacturer's instructions.

WARNING Risk of property or product damage. Do not use in-tank cleaners in your toilet. Products containing chlorine (calcium hypochlorite) can seriously damage tank fittings. The damage can cause leakage and severe property damage.

US Office
30131 Town Center Dr.
Sutie 298
Laguna Niguel, CA 92677
(949) 900-4353
support@studioluxcorp.com
www.studioluxcorp.com







