


THIS DRAWING IS FOR SPATIAL CONSIDERATION ONLY, AND SUBJECT TO CHANGE W/O PREVIOUS NOTICE, DO NOT PRE-PLUMB TO THESE DIMENSIONS

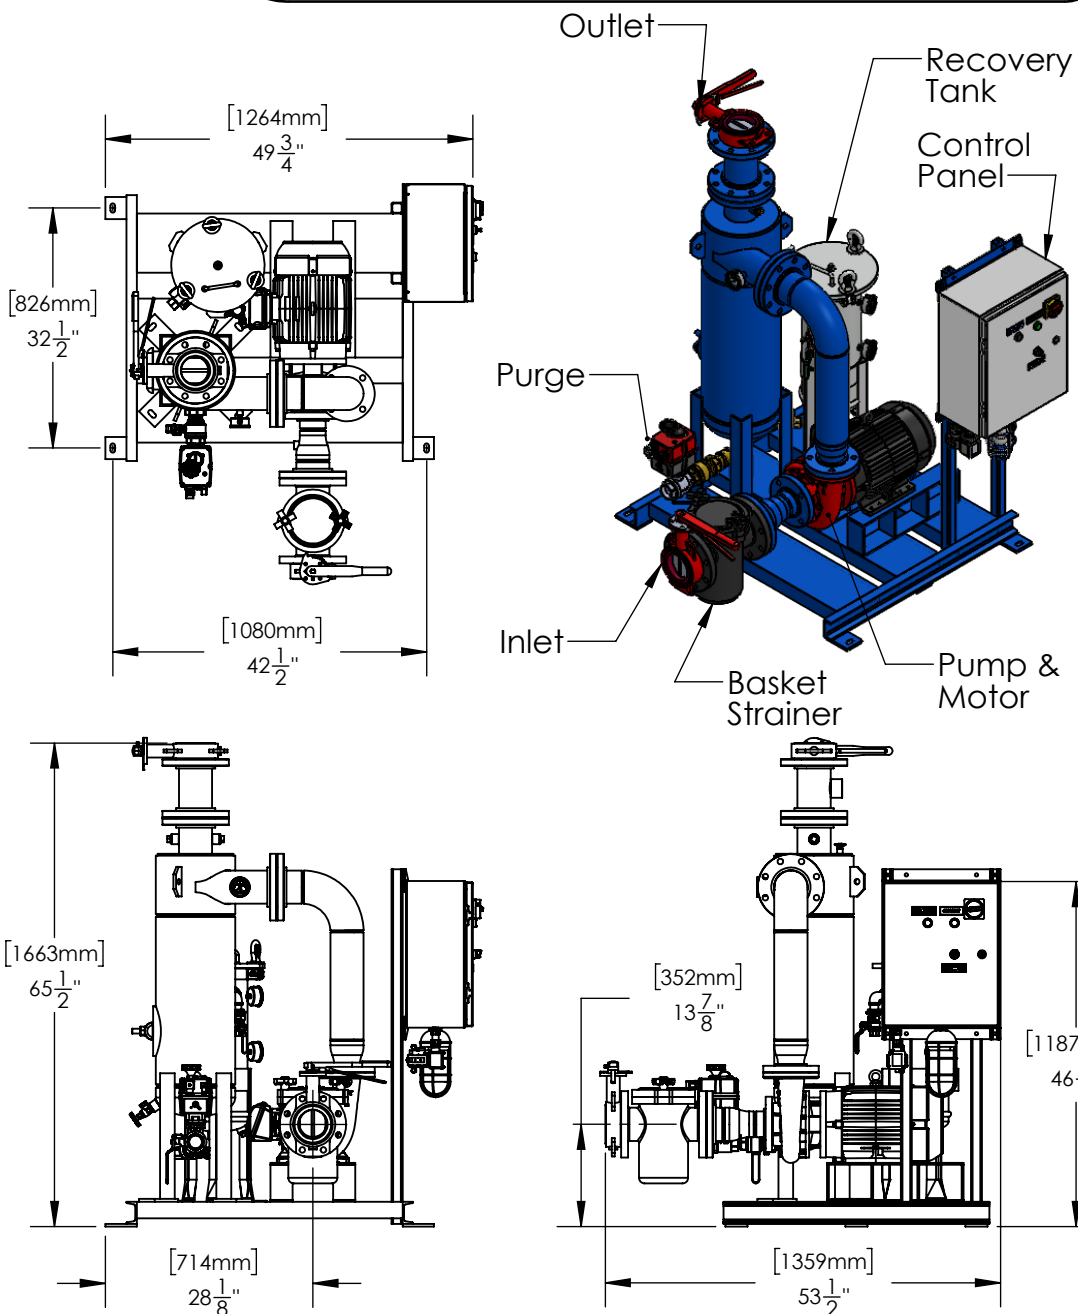

CSH401-HH

Operating Point	475 GPM (US) @ 80' TDH		
Mainstream Flowrate	380		
Sidestream Flowrate	95		
Separator - Size & Style	CS-4T-FLG, Carbon Steel, Powder Coated		
Frame Construction	Carbon Steel (Welded), Powder Coated		
Pipe Assy - Construction	Carbon Steel (Welded), Powder Coated		

ELECTRICAL - Motor & System			
Horsepower (HP)	15		
Power - Volts / Hz	460/60	575/60	230/60
RPM	3500	3500	3500
Motor Amperage	21	17	42
System Total Amperage	23	19	44

PUMP	
Installation	Flooded Suction Required
Case Material	Cast Iron
Impeller Material	Cast Iron
Mechanical Seal	Buna - Carbon / Ceramic

BASKET STRAINER (Optional)	
Body Construction	Cast Iron
Strainer Mesh	Stainless Steel with 1/4" perforations
Connection - Type & Size	4" FLG (150#)

CONTROL PANEL (UL Listed & Labeled. Manufactured to UL 508A)	
Enclosure (UL listed & CSA approved)	NEMA 4 (STD) - Carbon Steel, Powder Coated NEMA 4X (Optional) - 304
Electrical Components (UL listed & CSA approved)	Thermal Overload Starter, HOA, XFMR, "RUN" Light, Door Disconnect, Contactor, Purge Timer

PROCESS INLET	
Connection - Type & Size	4" FLG (150#) - Butterfly Valve

PROCESS OUTLET	
Connection - Type & Size	4" FLG (150#) - Butterfly Valve

PURGE - MBV(motorized ball valve) & RT (Recovery Tank)	
Actuator Motor	24-240V AC/DC
MBV Connection Type	Female NPT 1.5"
RT Size	RT-1
RT Connection Type	RTM-10

PRESSURE - Maximum Operating	
Pump Inlet	100 psi (6.9 bar)
Vessel	150 psi (10.3 bar)

TEMPERATURE - Maximum Operating	
System	34°F - 122°F (1°C - 50°C)

WEIGHTS	DRY	SHIPPING	OPERATING
lbs (kg)	1102(500)	1290(585)	1304(592)

PREPARED BY: PEI-CHI (JASON) WU	PAGE: 1
RELEASED BY: BOB KAZANJY	DATE: 01/09/2018

REV: A	*UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES
------------------	--