


THIS DRAWING IS FOR SPATIAL CONSIDERATION ONLY, AND SUBJECT TO CHANGE W/O PREVIOUS NOTICE, DO NOT PRE-PLUMB TO THESE DIMENSIONS

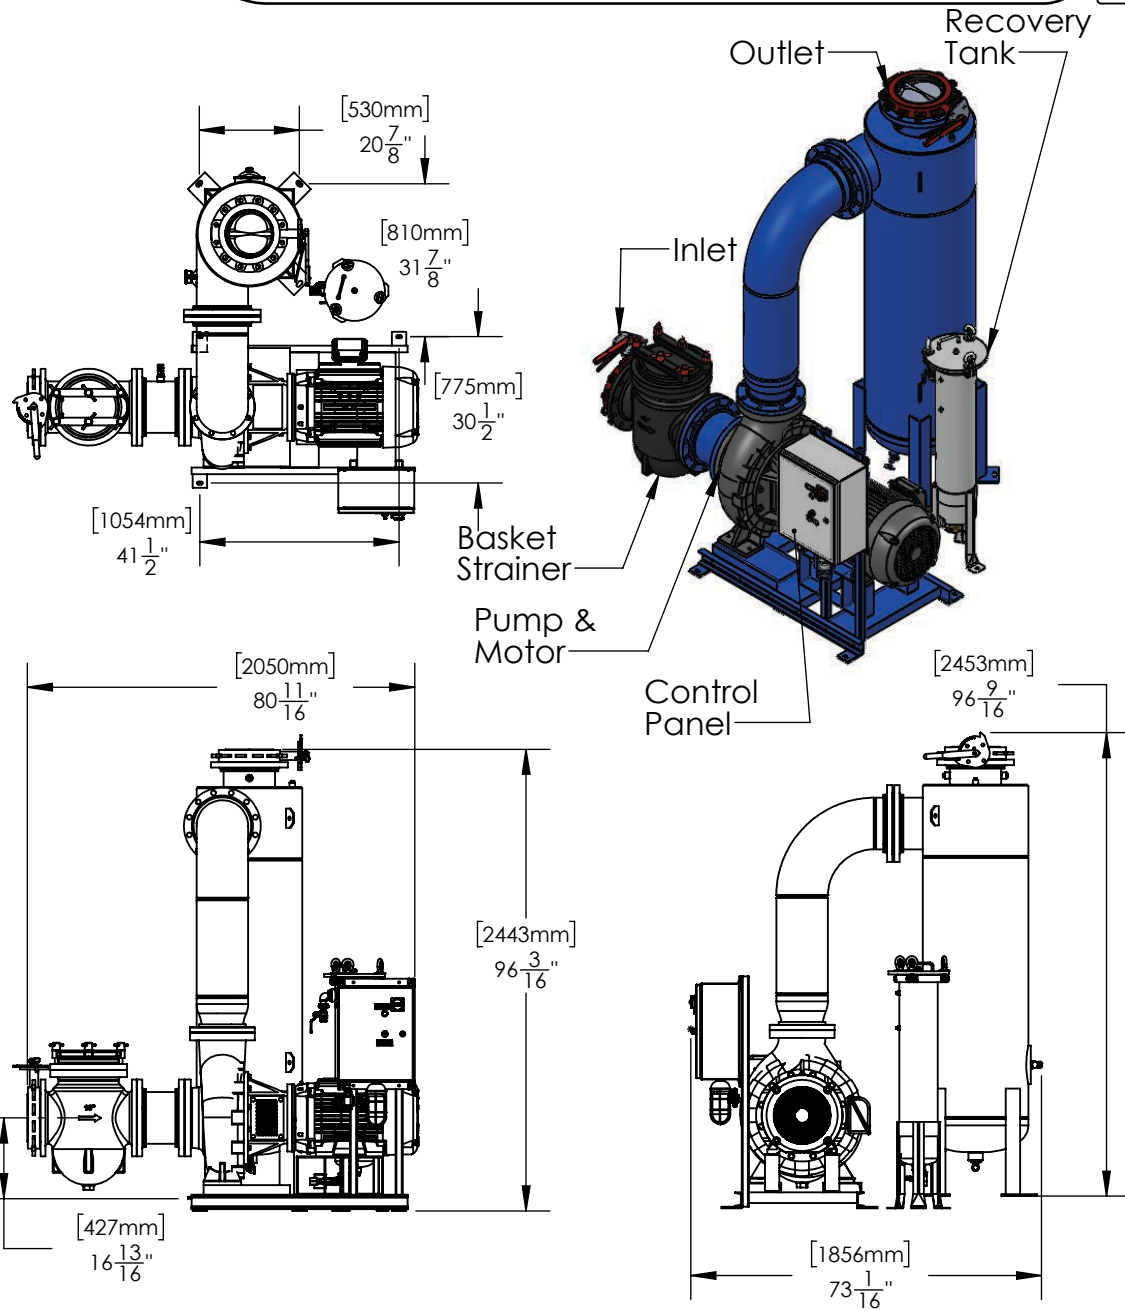

### CSR1000-HH

Operating Point	2300 GPM (US) @ 80' TDH		
Separator - Size & Style	CS-10T-FLG, Carbon Steel, Powder Coated		
Frame Construction	Carbon Steel (Welded), Powder Coated		
Pipe Assy - Construction	Carbon Steel (Welded), Powder Coated		

#### ELECTRICAL - Motor & System

Horsepower (HP)	60		
Power - Volts / Hz	460/60	575/60	230/60
RPM	1750	1750	1750
Motor Amperage	77	62	154
System Total Amperage	79	64	156

#### PUMP

Installation	Flooded Suction Required		
Case Material	Cast Iron		
Impeller Material	304		
Mechanical Seal	EPDM - Carbon / Ceramic		

#### BASKET STRAINER (Optional)

Body Construction	Cast Iron		
Strainer Mesh	Stainless Steel 1/4" perforations		
Connection - Type & Size	10" FLG (150#)		

#### CONTROL PANEL (UL Listed & Labeled. Manufactured to UL 508A)

Enclosure (UL listed & CSA approved)	NEMA 4 (STD) - Carbon Steel, Powder Coated NEMA 4X (Optional) - 304		
Electrical Components (UL listed & CSA approved)	Thermal Overload Starter, HOA, XFMR, "RUN" Light, Door Disconnect, Contactor		

#### PROCESS INLET

Connection - Type & Size	10" FLG (150#) - Butterfly Valve		
--------------------------	----------------------------------	--	--

#### PROCESS OUTLET

Connection - Type & Size	10" FLG (150#) - Butterfly Valve		
--------------------------	----------------------------------	--	--

#### PURGE - RT (Recovery Tank)

Recovery Tank	RT-1.5		
Connection Type	RTM-20		

#### PRESSURE - Maximum Operating

Pump Inlet	100 psi (6.9 bar)		
Vessel	150 psi (10.3 bar)		

#### TEMPERATURE - Maximum Operating

System	34°F - 122°F (1°C - 50°C)		
--------	---------------------------	--	--

WEIGHTS	DRY	SHIPPING	OPERATING
lbs (kg)	3721 (1688)	4171 (1892)	5235 (2375)

\*UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES

PREPARED BY: JASON) WU PAGE: 1  
 RELEASED BY: BOB KAZANJY DATE: 12/19/2018 REV: A



General Water Systems | P. O. Box 444 | Desert Hot Spring | CA | 92204  
 www.gwslp.com | info@gwslp.com | 951.213.9506 | 386.255.3909

### CSR1000-HH