

6-INCH SUBMERSIBLE TURBINE STAINLESS STEEL




6L SERIES

Each pump is personally built by our expert craftsmen and then passed through our world-class testing facility to ensure your exact specifications are met.


- Produces up to 320 GPM
- Open or closed stainless steel impeller
- Durable in high-corrosive and harsh pumping environments
- Perfect for municipal, off-shore, chemical and mining applications

In most cases, Wolf can take an order and ship within 48 hours, truly delivering on our promise: Right Pump. Right Now.

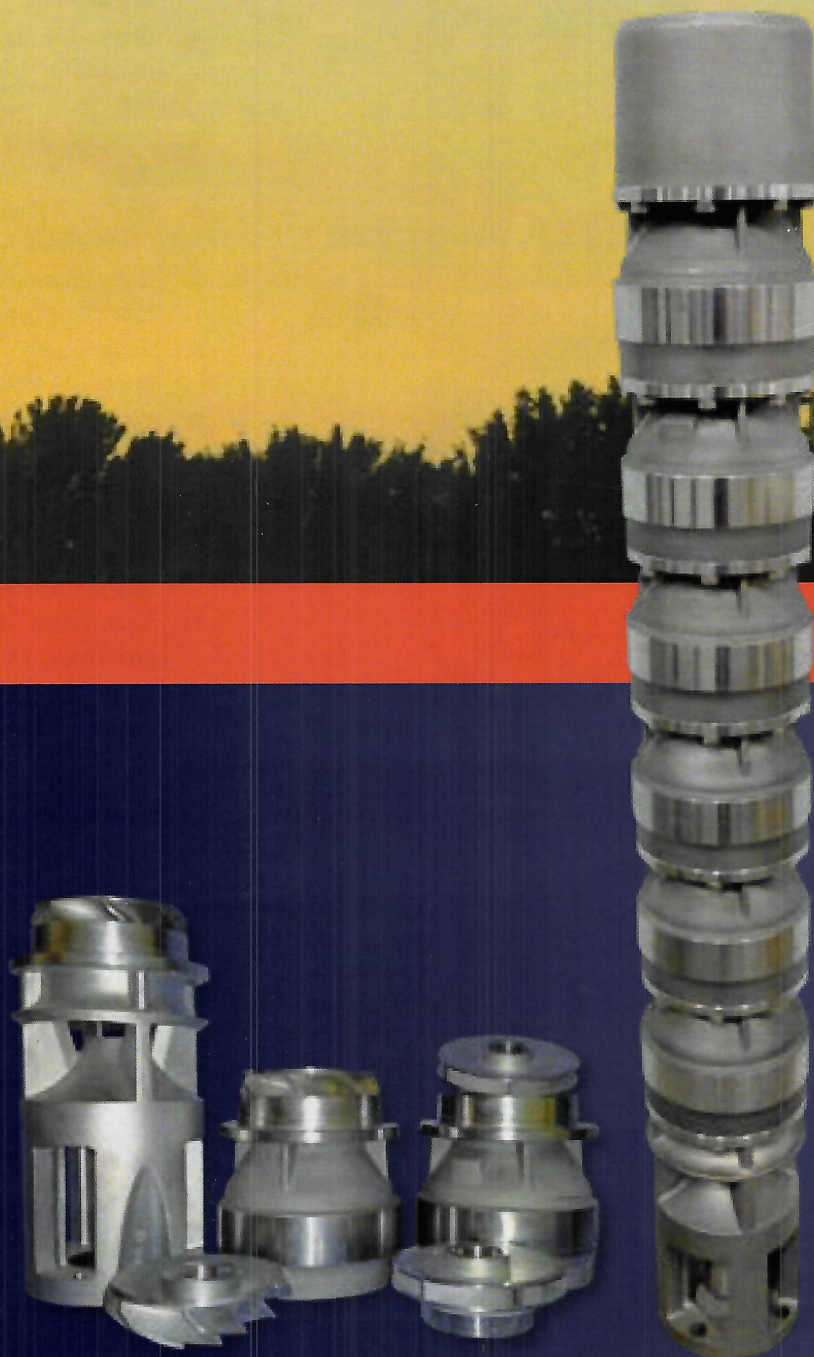


See our Pump Selector at:

www.wolfpumps.com


WOLF 
CUSTOMIZED PUMPS
Right Pump. Right Now.®

FEATURES AND BENEFITS

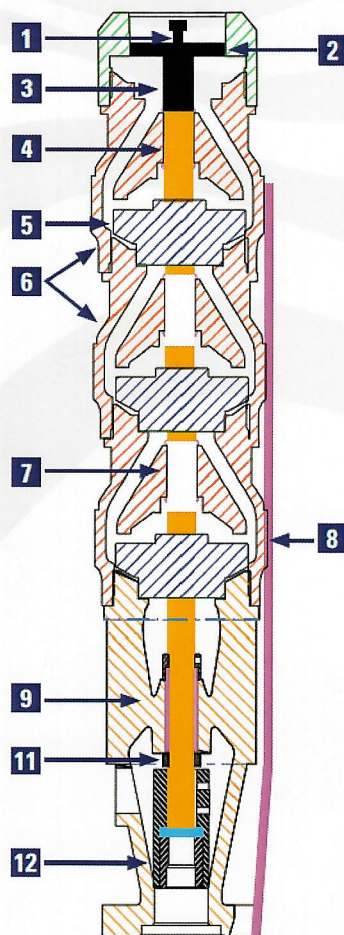


1. Discharge - Optimized for high, efficient production
2. Upthrust Protection - Standard on all pumps three stages or less. Available as an option on all others. Preset at the factory. Available in discharge assembly or bumper model.
3. Discharge Bearing – Vesconite construction available for increased wear resistance. Other material options may be available for specific applications.
4. Shaft - 416 stainless steel, 316 stainless steel, and 17-4 are standard options for this pump. Other materials are available on request. Contact factory.
5. Impeller - Long-wearing, cost-effective 316 stainless steel or 304 stainless steel.
6. Bowls - Designed to last. 316 stainless steel - designed for high production / high efficiency performance.
7. Bowl Bearing - Available in vesconite, nitrile rubber (BunaN), or other material selected specifically per application.
8. Cable Guard - Stainless steel - provides corrosion-resistant protection for the motor lead.
9. Suction / Motor Bracket – 316 stainless steel for 6" NEMA motor. Designed with a strong, steady bearing to support high torque and high flow demands.
10. Intake Screen - Corrosion-resistant 304 stainless steel material. Fitted to maximize protection against unwanted objects entering the pump during operation. (Not shown).
11. Sand Collar – UHMW or stainless steel (application specific) with posiloc positioning screws.
12. Motor Coupling - 416 stainless steel - manufactured to fit NEMA standard design.

6L SERIES 1-STAGE FULL-TRIM PERFORMANCE CURVE RANGE

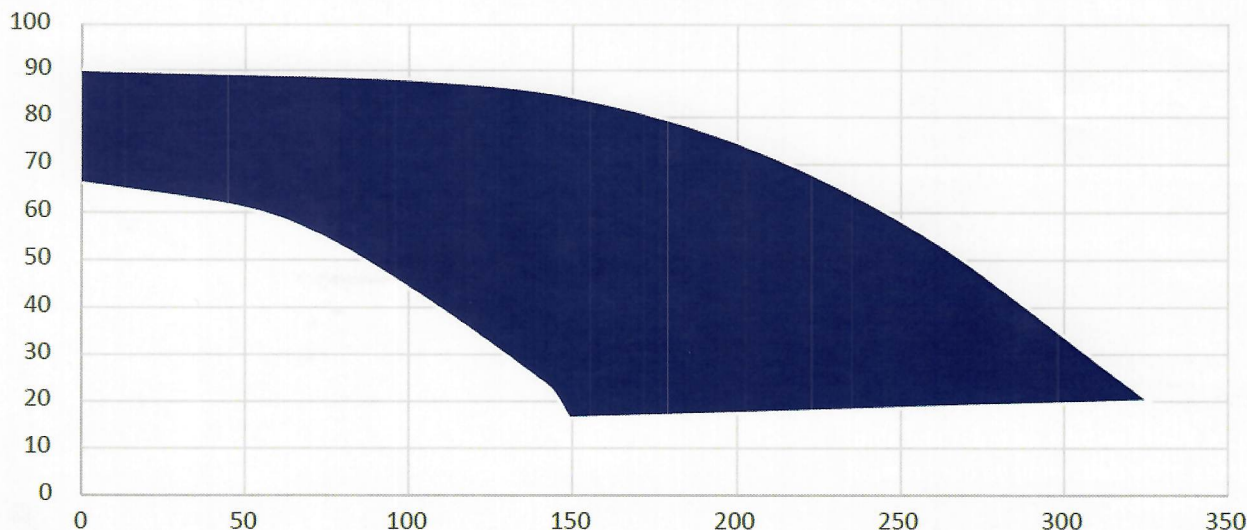

DOE Compliance

PUMP MODEL	Impeller Dia.	P.E.I.
6LH7V-SS	4.515"	0.96
6LM6V-SS	4.515"	0.92

WOLF 
 CUSTOMIZED PUMPS
 Right Pump. Right Now.®