

Here are some helpful hints when measuring your dog for a Variocage. Please note that it is important to measure your dog first before measuring your vehicle. Proper fit for your dog is vital to your dog's comfort and safety.


As a general rule, if you're not sure which size to select, choose a larger size.

HOW TO MEASURE YOUR PET FOR THE VARIOCAGE

- 1. Hold the measuring tape in one hand and place the free end at the front edge of your dog's nose pulling it straight back to the base of his tail. This will give you the length measurement for your dog. You will need to add Eight (8) centimeters to allow the dog room to turn around in the cage.
- 2. Place the tape at the withers (top of the shoulder) and measure down to the floor to get a proper height measurement. Add Eight (8) centimeters to give the dog plenty of room if he wants to stand up.

Be sure to estimate your dog's adult size if you order his crate while he is still growing. You can check his breed standard to get an estimate of what size he will reach at maturity to make sure your crate is large enough.

Proper measuring will assure that your pet can comfortably stand, sit, turn around, and lie down in his cage. You can always add a divider panel in the MIM Safe Variocage Double if necessary, and reserve the remaining space until your pet grows into it.

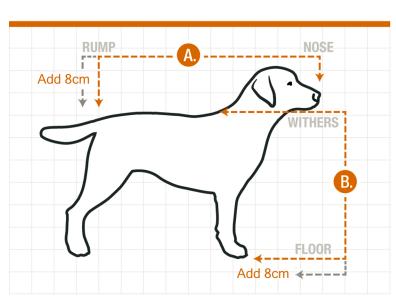

Add 8cm to each measurement

	Telescoping Length (min-max)	Width	Height
Variocage MiniMax			
390 - MiniMax (L)	570-770mm	440mm	455mm
366 - MiniMax (XL)	570-770mm	555mm	455mm
Variocage Compact*			
367 - Compact (L)	600-820mm	555mm	650mm
368 - Compact (XL)	600-820mm	700mm	650mm
Variocage Single			
363 - Single (L)	760-1030mm	555mm	650mm
376 - Single (XS)	730-990mm	555mm	590mm
380 - Single (XL)	810-1030mm	700mm	715mm
381 - Single (MAX)	920-1160mm	700mm	845mm
Variocage Double			
377 - Double (S)	730-990mm	930mm	590mm
383 - Double (M)	760-1030mm	930mm	650mm
361 - Double (L)	760-1030mm	990mm	650mm
364 - Double (XL)	810-1030mm	990mm	715mm
365 - Double (XXL)	810-1030mm	1060mm	715mm
369 - Double (MAX)	920-1160mm	1060mm	845mm

'The Variocage Compact is designed to work with a raised sil