


## CONSTRUCTION NOTES

- ① CONSTRUCT 4" THICK AC PAVING OVER 6" THICK OF 95% COMPACTED AGGREGATE BASE OVER 12" THICK OF 90% COMPACTED SUBGRADE.
- ② CONSTRUCT CONCRETE SMOLE (3' WIDE) PER DETAILS ON SHEET 4.
- ③ PROVIDE EXPANSION AND CONTROL JOINTS PER DETAILS ON SHEET 5.
- ④ CONSTRUCT CONCRETE PAD. SEE STRUCTURAL PLANS.
- ⑤ SAWCUT AND REMOVE 1 FT. MIN. OF EXISTING AC PAVEMENT AND RECONSTRUCT TOLL BORTH AC PAVEMENT.
- ⑥ CONSTRUCT 6" CURB 21'-6" PER SPWD. STD. PLAN 120-2. SEE SHEET 11 FOR DETAILS.
- ⑦ PAINT PER ACHD PLANS.
- ⑧ RECONSTRUCT EX. DRIVEWAY APPROACH PER CITY OF ONTARIO STD. PLAN 1204 (SEE DRWD PLANS). SEE SHEET 11 FOR DETAILS.
- ⑨ PAINT HATCHED ENHANCED AND STRIPING PER DETAILS ON SHEET 4 OR PER ACHD. PLAN.
- ⑩ INSTALL CONCRETE WHEELSTOP PER SHEET 4.
- ⑪ PAINT 4" WIDE WHITE STRIPS BEARING STRIPS (BLUE 1" ACCESSIBILITY STALLS) (2 COATS MIN.). SEE DETAILS ON SHEET 4 OR PER ACHD. PLANS.
- ⑫ CONSTRUCT TRASH ENCLOSURE WITH SOLID COVER ROOF PER SOLID WASTE REFUSE AND RECYCLING MANUAL AND PER ACHD PLANS.
- ⑬ CONSTRUCT 6" THICK CONCRETE PAD. SEE STRUCTURAL PLANS.
- ⑭ CONSTRUCT 5'x5' CONCRETE PAVEMENT PER DETAIL ON SHEET 5.
- ⑮ PAINT TRAFFIC FLOW ARROW PER ARCHITECT PLANS.
- ⑯ GRADE TO DRAIN TOWARD WALL.
- ⑰ PROVIDE DRAINAGE THRU WALLS BY UNDERGOING 1 LAYER OF COW CELLS ABOVE THE EXISTING GRADE. STRIPS OF UNFROSTED CELLS SHALL BE EMBED 48" AT A MINIMUM.
- ⑱ INSTALL ADA PARKING SIGN PER ACHD PLANS.
- ⑲ INSTALL ADA ACCESSIBLE ROUTE SIGN PER ACHD PLANS.
- ⑳ INSTALL TRIMMATED DOSES PER DETAILS ON SHEET 5.
- ㉑ INSTALL UNPAVEMENTED USE OF HANDICAP PARKING SIGN. THE SIGN SHALL BE 17' X 22' HIGH. SEE DOC. 18-502.6.2 FOR MORE INFO.
- ㉒ INSTALL HATCHED PINK 23'x30' SIGN. SEE DOC. 18-502.6.2 FOR MORE INFO.
- ㉓ CONSTRUCT 6" PCC WITH #4 REBARS AT 18" O.C. EACH WAY OVER 6" THICK OF 90% COMPACTED AGGREGATE BASE OVER 12" THICK 90% COMPACTED SUBGRADE.
- ㉔ REMOVE AND REPAIR EXISTING CONCRETE PAVEMENT. NEW PAVEMENT THICKNESS, BASE, AND SUBGRADE SHALL MATCH EXISTING.
- ㉕ CONSTRUCT ADA RAMP WITH SIDEWALK TO RIGHT OF WAY LINE. INSTALL DETECTOR WARNING SURFACE ON RAMP.
- ㉖ DETECTOR WARNING ADJACENT TO SIDEWALK AS NECESSARY AT 2:1 SLOPE. MAX. GRADE ONSTE AREA ADJACENT TO SIDEWALK AS NECESSARY AT 2:1 SLOPE. MAX. SAWCUT EXISTING CURBS. SEE SHEET 2.

13. INSTALL LANDSCAPE PLANTS PER SEPARATE PLANS AND PERMIT.
14. CONSTRUCT WALL PER SEPARATE PLANS AND PERMIT.
15. CONSTRUCT BOLLARD PER DETAIL ON SHEET 4.
16. CONSTRUCT 5x5 CONCRETE PAVEMENT PER DETAIL ON SHEET 5.
17. PAINT TRAFFIC FLOW ARROW PER ARCHITECT PLANS.
18. GRADE TO DRAIN THRU WALL.
19. PROVIDE BRANDED THRU WALLS BY UNGRAVELLING 1 LAYER OF DMU CELLS BELOW THE EXISTING GRADE, SPACING OF UNGRAVELLED CELLS SHALL BE EVERY 45" AT 14 MINIMUM.
20. INSTALL ADA PARKING SIGN PER ARCH PLANS.
21. INSTALL ADA ACCESSIBLE ROUTE SIGN PER ARCH PLANS.
22. INSTALL TRIMCAVED DOMES PER DETAILS ON SHEET 5.
23. INSTALL "UNGRAVELLED USE OF HANDICAP" SIGN PER CBC-1B-502.6.2 FOR MORE INFO.
24. INSTALL "MINIMUM ONE \$250 SIGN" SEE CBC-1B-502.6.2 FOR MORE INFO.
25. CONSTRUCT 6" PCC WITH #4 REBARS AT 18" O.C. EACH WAY OVER 6" THICK OF 95% COMPACTED AGGREGATE BASE AT 12" THICK 90% COMPACTED SUBGRADE
26. REMOVE AND REPLACE EXISTING CONCRETE PAVEMENT - NEW PAVEMENT THICKNESS, BASE AND SUBGRADE SHALL MATCH EXISTING.
27. CONSTRUCT ADA RAMP WITH SIDEWALK TO RIGHT OF WAY LINE.
28. INSTALL DETECTOR WARNING SURFACE ON RAMP.
29. GRADE ON-SITE PER ADDENDUM TO SPECIFICATIONS AS NECESSARY AT 2:1 SLOPE MAX.
30. SMOOTH EXISTING CURBS, SEE SHEET 2.

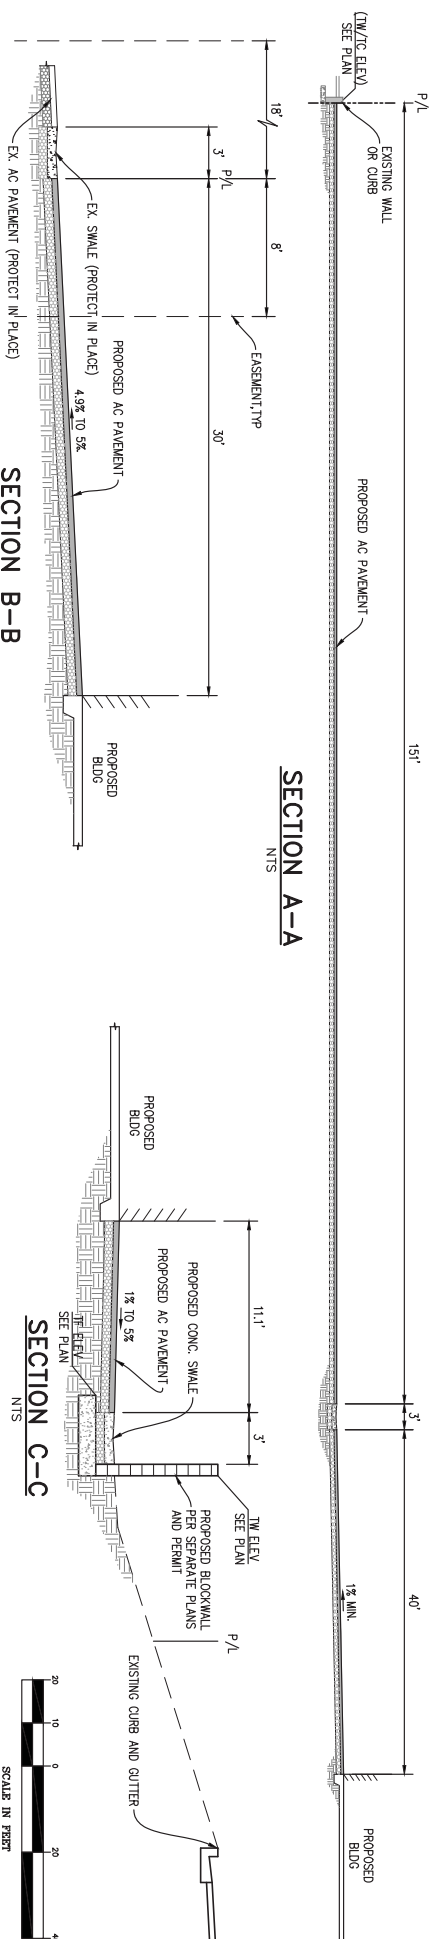

NO WORK SHALL BE DONE ON THIS SITE UNTIL BELOW AGENCY IS NOTIFIED OF INTENTION TO GRADE OR EXCAVATE

## Underground Service Alert

Call: 811

[illegible]

# ABLE INDUSTRIES

2006 S. BAKER AVENUE  
ONTARIO, CA 91761

ONTARIO, CA 91761

## PRECISE GRADING PLAN

B201801883

SHEET 3 OF 13