

WATER CHANGES EVERYTHING

Sustainable, emission free water pumping solutions delivers water without using any fuel or electricity.





About Us

Water Powered Technologies Ltd (WPT) is a UK-based clean-tech company revolutionising the way the world moves water, without fuel, electricity, or emissions. At the heart of our innovation is the Papa Pump®, a globally patented hydro-powered water pump that uses the energy of naturally flowing water sources, such as rivers, streams, and springs, to deliver water uphill or across distances with zero running costs.


Our hydro pumps use no external energy sources but operate just through the power of running water and are designed to require little or minimal maintenance during their operational lives.

The composite Papa pump, has been sold in over 60 countries with full large-scale production capabilities proven and implemented.





Company Milestones

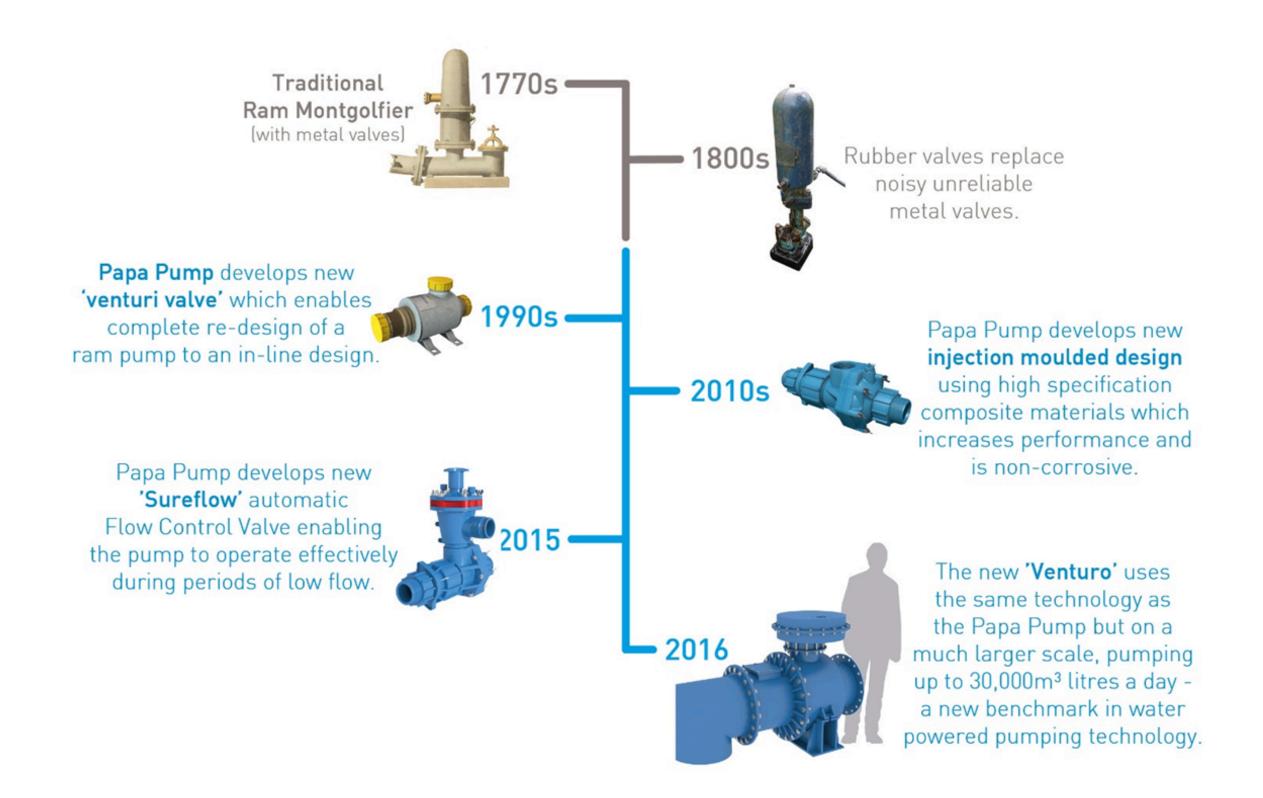





Our Solution Papa Pymp

Our patented technology, Hydro ram pump reliably delivers water from a position near the water source to a higher location without using any fuel or electricity..!

The world's first and only injection moulded, composite water powered pump.







Attestation de Conformité Sanitaire international accreditation approved for use with drinking water in France.


National Sanitation Foundation international accreditation for use in residential or commercial plumbing projects.



How Papa Pump Works?

- The Papa Pump uses natural power of water flowing downhill to pump itself to higher ground for irrigation, watering livestock or human use.
- Hydrams can lift water to over 30 times the height of the fall to it from the source of water. The power for pumping comes from the flow of water via gravity to the pump, and doesn't require a generator, electricity or even wind.
- They operate continuously, 24 hours per day, 7 days per week. The only maintenance that is usually required is a change of valve (\$30) every 2 to 3 years.

It can be used as a stand-alone unit to pump water to the field or can be combined with other complementary technologies such as drip irrigation. Another major benefit of the technology is that it can be implemented without requiring existing or additional infrastructure, as long as flowing water is present.

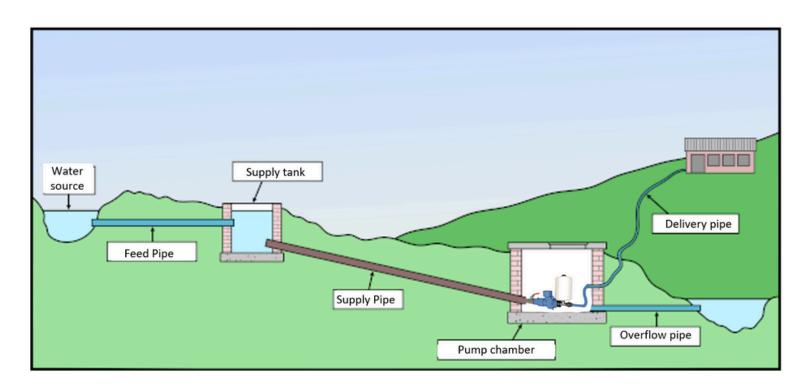



A typical hydraulic ram pump system, with water flowing down the drive pipe to the pump, from where it's delivered to higher ground where it's needed.




Supply Head And Pipes

- The more supply head you can have the more efficiently the pump will operate, you should always try to use the maximum supply head available.
- The minimum supply flow required with a 2" pipe is 20L/M (5.3 US gpm). The amount of friction caused by a pipe increases with the length of the pipe.
- All pipes should be kept as straight as possible and be kept on a consistent gradient to reduce friction, this will also make it much easier to clean the supply pipe once it comes to servicing.
- Do not use a soft of flexible pipe for the supply pipe, the ideal pipe to use is 2" (internal diameter) steel pipe.
- The length of the supply pipe can be from 3 10 times the supply head although optimum efficiency is between 5 –7 times.

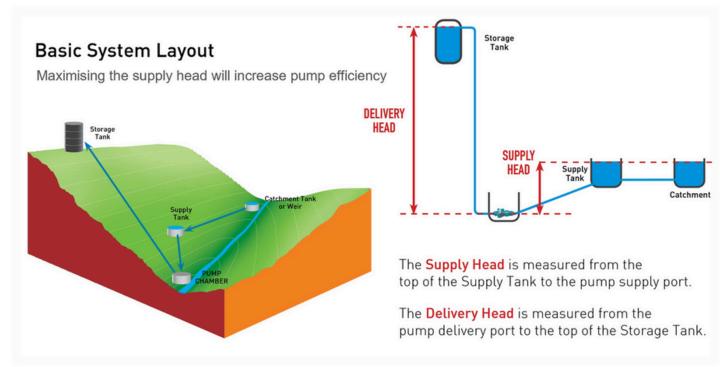

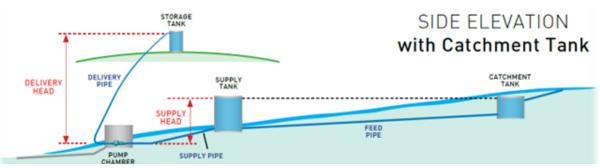

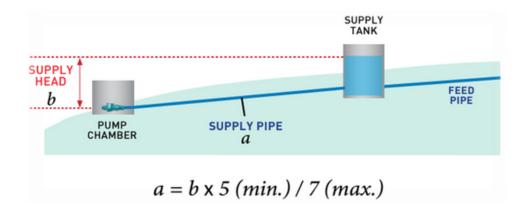



Papa 'Agri' Pump Specifications



The Agri pump is manufactured utilizing a high quality injection molded engineering composite material.

	Agri Pump	
Casing	Glass-filled Nylon	
Barrel	Glass-filled Nylon	
Seals	EPDM	
Max. Head (Meters)	100	
Max. Pressure (Bar)	10	
Weight (kg)	2.5	
Length (cm)	30	
Width (cm)	18	
Height (cm)	16	
Inlet Diameter	2 Inch BSP	
Outlet Diameter	1 inch BSP	
Inlet Flow	5- 60 L/Min	
Outlet Flow *	100 – 30,000 L/Day	

^{*}Please refer to pump performance chart to determine daily output flow rates.

The Papa pump specifications above relate to the pump unit – although the papa pumps are supplied as 'kits' which include a pressure vessel, 2 inch shut-off valve, delivery hose assembly, water filter, maintenance tool, set of replacement valves and installation and maintenance manuals.



Papa Pump Specifications





Papa pumps are available in two versions; The metal pumps is 'heavy duty' premium product manufactured from high quality stainless steel and bronze – whilst the 'composite' pumps offer a lower cost alternative utilising a high quality injection moulded engineering composite material.

	Metal Pump	Composite Pump
	<u> </u>	
	Stainless Steel	Glass-filled Nylon
Casing	(304)	MANUFACTURE CONTROLS
	(Wras approved)	(Wras approved)
	Bronze	Glass-filled Nylon
Barrel	(660)	
	(Wras approved)	(Wras approved)
	EPDM	EPDM
Seals		
	(Wras approved)	(Wras approved)
Max. Head (Meters)	200	100
Max. Pressure (Bar)	20	10
Weight (kg)	6.5	2.5
Length (cm)	34	30
Width (cm)	15	18
Height (cm)	17	16
Inlet Diameter	2 Inch BSP	2 Inch BSP
Outlet Diameter	1 inch BSP	1 inch BSP
Inlet Flow	5- 60 L/Min	5- 60 L/Min
Outlet Flow *	100 – 30,000 L/Day	100 – 30,000 L/Day

^{*}Please refer to pump performance chart to determine daily output flow rates.


The Papa pump specifications above relate to the pump unit, although the papa pumps are supplied as 'kits' which include a pressure vessel, 2 inch shut-off valve, delivery hose assembly, water filter, maintenance tool, set of replacement valves and installation and maintenance manuals.



PapaPump vs Traditional Ram Pump

- Traditional hydraulic ram pumps often suffered from reliability issues because they use valves which have a high surface area and are subjected to great hydraulic pressure which can cause intermittent lock on of the valve and high fatigue.
- The PapaPump utilizes our novel and 'patented' venturi valve which operates on a different principle than all other ram pumps thereby reducing size, pressure and wear on the valve by 95% whilst also allowing greater adjustability over a wider range of available water flows. Maintenance intervals and costs are dramatically reduced as a result with high reliability defining the PapaPump as the breakthrough product in its class.

- Maintenance is very simple so a complete change of valves can be undertaken in around 10 minutes by the user utilizing the unique multi-tool provided with each PapaPump kit.
- Because of the large surface area of traditional pump valves it is necessary that the delivery head is at least 3 times the supply head to prevent valve lock on, PapaPumps can operate with a delivery head equal to the supply head without valve lock on occurring.

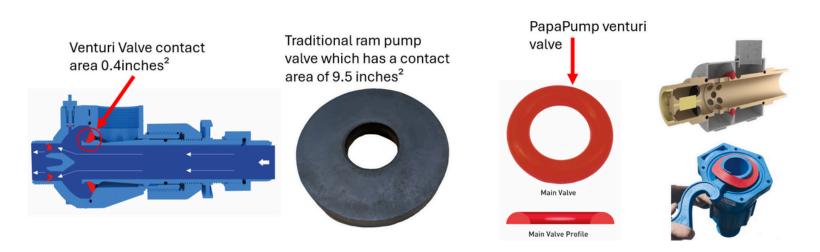



PapaPump Performance

All 'ram' pumps utilize a similar operating principle whereby a large volume of 'low pressure' water is converted into a lowered volume of 'high pressure' water and the maximum efficiency is dependent on the overall system design. The pumps themselves will also have an effect on the overall system efficiency although with most pumps operating effectively the differences can be marginal and it is not the policy of WPT to claim 'higher efficiencies' compared to other 'ram' pumps manufactures – however there have been previous independent comparisons which indicate that PapaPumps do operate at higher efficiency and with nearly 30 years of experience it has been widely commended by customers replacing traditional pumps with PapaPumps that there is always an increase in the efficiency. WPT accept this although would prefer to adopt that it is the reliability of function of PapaPumps providing a significant advantage overall. Whilst each site is different a single PapaPump can deliver over 30,000 L/day.





Benefits of the Papa pump

- Unlike a solar pump, it runs 24 hours a day.
- It doesn't require any fuel or electricity to run.
- Zero emissions.
- Requires very **little maintenance** (inexpensive valves that need changing every 2-3 years).
- Uses surface water so won't affect ground water levels.




- Can make big savings on utility/water costs.
- Can be used in off grid and remote locations.
- The pump can be serviced quickly on site.
- More the one pump can be installed in parallel to move more water over greater distances/elevation.
- Does not require large flows of water to work.
- Can be used in below freezing temperatures.

Papa Pymp*



Ancillaries

- Tradition ram pumps are not supplied with intake filters which means users need to provide their own filter to prevent the ingress of debris.
- Each PapaPump is supplied with our unique and 'patented' Seradisc filter which eliminates the ingress of debris entering the pump thereby dramatically reducing maintenance requirements.
- Each PapaPump is also supplied with a high-quality full flow ball valve enabling easy isolation of the system for pump maintenance.
- Each kit also includes a full spare set of valves, seals and a multi-tool.







Full flow ball valve



Multi-tool



Valve and seal set



Sureflow

Water Powered Technologies have developed the Sureflow Valve to work with WPT products to ensure seamless and automatic operation where flows are small, variable or intermittent. This is especially useful in countries subject to dry seasons or low rainfall.







Smarter Than Solar, Cleaner Than Diesel! Cheaper Than Electricity







Other Affordability Options

Other finance models could include 'direct finance' as currently adopted by the agricultural development bank of Panama.

Opportunities to increase affordability could include local assembly / manufacture to reduce price of pumps although this would be most beneficial pending local market uptake where non-finance options proved effective for mass adoption.







Hydro Papa Pump vs Diesel Pump System


EXAMPLE: FRUIT PLANTATION AND VEGETABLE IRRIGATION

ZERO

DIESEL PUMP Typical cost of installing and operating a Diesel Pum 2 Hectares Vegetable Farm INSTALLATION COSTS Cost (U	Zanach	PAPA PU Typical cost of installing and op
INSTALLATION COSTS	S\$)	
Piping and other equipment Installation Cost Miscellaneous Total Installation cost 10yr DEPRECIATION (Yearly costs) OPERATION COSTS (300 days per year) Diesel and Labour (unskilled) per year Total Yearly Cost \$1, \$7, \$1, \$1, \$1, \$1, \$1, \$1,	95 14 09	2 Hectares Vegetable Farm INSTALLATION COSTS (3 Pump S 3 x Papa Pumps Piping and other equipment Installation Cost Miscellaneous Total Installation cost 10yr DEPRECIATION (Yearly cost OPERATION COSTS (300 days per Cost of internal valves (\$30 every
CO ₂ emissions (kg per year) 68,	92	CO ₂ emissions (kg per year)
Piping and other equipment 66, Installation Cost 6,	755 516	40 Hectares Plantation INSTALLATION COSTS (6 Pump S 6 x Papa Pumps Piping and other equipment Installation Cost Miscellaneous Total Installation cost
10yr DEPRECIATION (Yearly costs) \$8,	246	10yr DEPRECIATION (Yearly cost
OPERATION COSTS (160 days per year) Diesel and Labour (unskilled) per year \$7,	_	OPERATION COSTS (160 days per Cost of internal valves (\$60 every
Total Yearly Cost\$15,	66	Total
CO ₂ emissions (kg per year) 368,	238	CO, emissions (kg per year)

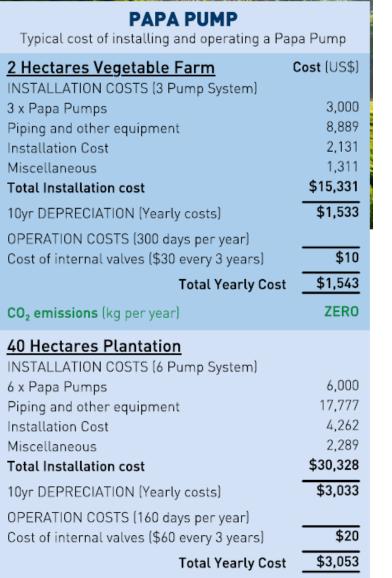

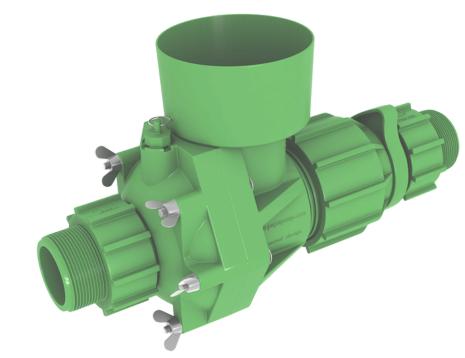







PAPA PUMP: ZERO-ENERGY WATER SOLUTION SAVES £20,000/YEAR

Water needs	20m³ per day		
Before Papa Pump Installation: Cost of mains water £22,000+ VAT			
After Papa Pump Installation Cost of mains water	n: £2,000+ VAT		
Cost of mains water Cost of spring water	£0.00		
Saving on Mains Water £20,000 Estimated cost of installation £18,000			
Return on Investment	less than 1 year		

Challenge:

• Farm relied on mains water to supply a 500-strong livestock herd, rising water costs became unsustainable. A nearby stream couldn't support conventional pumps due to its remote valley location

Solution:

- Farmer installed a spring catchment and a supply tank 20m above the pump chamber, Deployed a dual Papa Pump system. Pumped water 126 meters vertically over 1.2 km — without electricity or fuel
- Nearly 100% of mains water replaced with free spring water
- Annual savings of £20,000

Case Study | Lowmans Farm | Devon

We farm over 500 cattle with dairy and beef cows and they obviously drink a lot of water every day.

We were on mains water but it was getting unsustainable with the high bills, so we decided to look into using our own spring water. We used the Papa Pump system because there was no electricity or power where the water was and obviously they work off their own water supply. It was easy to install and there was no hassle with wires or connections.

Our water bills had been about £22,000 a year and now we are only using mains water for washing the parlour down and in the house. The cattle are now drinking the rest of it and we are estimating a saving of up to £20,000 a year!







SUPPLY TANK



PUMP CHAMBER




Case Studies and Project Details

- Agriculture is the main income source for the Seulibang community. Irrigation depends on rain, limiting vegetable farming to just 4–6 months during the rainy season.
- The village has one water source for drinking and a stream for sanitation and livestock use. No suitable water source exists for year-round irrigation.
- Despite the challenge, many households are eager to grow vegetables for both consumption and income. Lack of water access is driving migration, especially among youth and working-age people

Renewable World initially planned to install a hydraulic ram pump, but due to reduced efficiency at delivery heads over 100m, it was found unsuitable. After consulting Water Powered Technologies, they opted for the Papa Pump, capable of delivering around 18,000 litres of water per day without fuel or electricity. This reliable water access enabled households to grow cash crops during dry seasons, leading to improved year-round income and helping to reduce out-migration from the community.

Case Study | Mountain Village Water Supply | Nepal



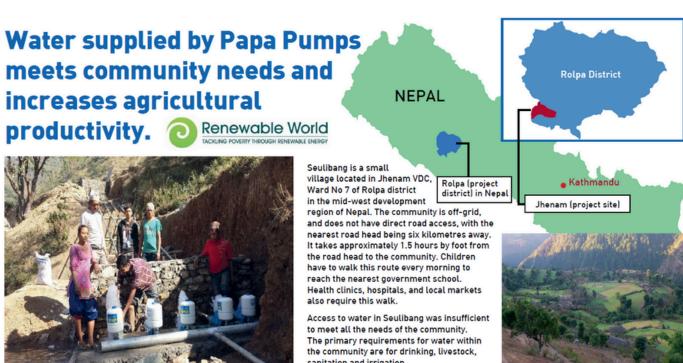



Case Studies and Project Details

A Northampton allotment faced the challenge of manually carrying water uphill from a spring nearly 500 metres uphill – a time-consuming and exhausting task. They installed a Papa Pump from Water Powered Technologies, which uses no fuel or electricity, relying solely on the natural energy of flowing water. The system now pumps up to 1,500 litres of water per day to storage tanks at the top of the site, making it easier for members to access water for their vegetables and flowers—saving time, effort, and ongoing costs.

Facts and Figures

Supply Head = 2 metres, Delivery Head = 10 metres

Delivery = 1500 litres per day,

Total Installation Costs including Papa Pump Kit, Pump Chamber, Pipes & Connectors, 2 x Storage Tanks,

Groundworks & Trenching = £7,500 + VAT

Running Costs = £0

Kingsley Park Allotments | Northampton











a 100% Renewable Energy Product

Thank You — Let's
Power Your Next Clean
Water Project Together.
Get In Touch With Us.



Phone +// (0) 1288

+44 (0) 1288 354 454



Mail

info@wptglobal.net



Website

waterpoweredtechnologies.com



Address

Bude, Cornwall, UK

AWARDS





























