



Klemsan
Trunkie

Wiring Ducts - 2014


Klemsan®

Klemsan Trunkie smartness in the panels

With 40 years of experience and innovation power,
Klemsan added a new product group to its portfolio.

Wiring ducts provide perfect appearance,
durability and efficiency, which you need.



Klemsan Trunkie Wiring ducts are sufficient for
your wire management.

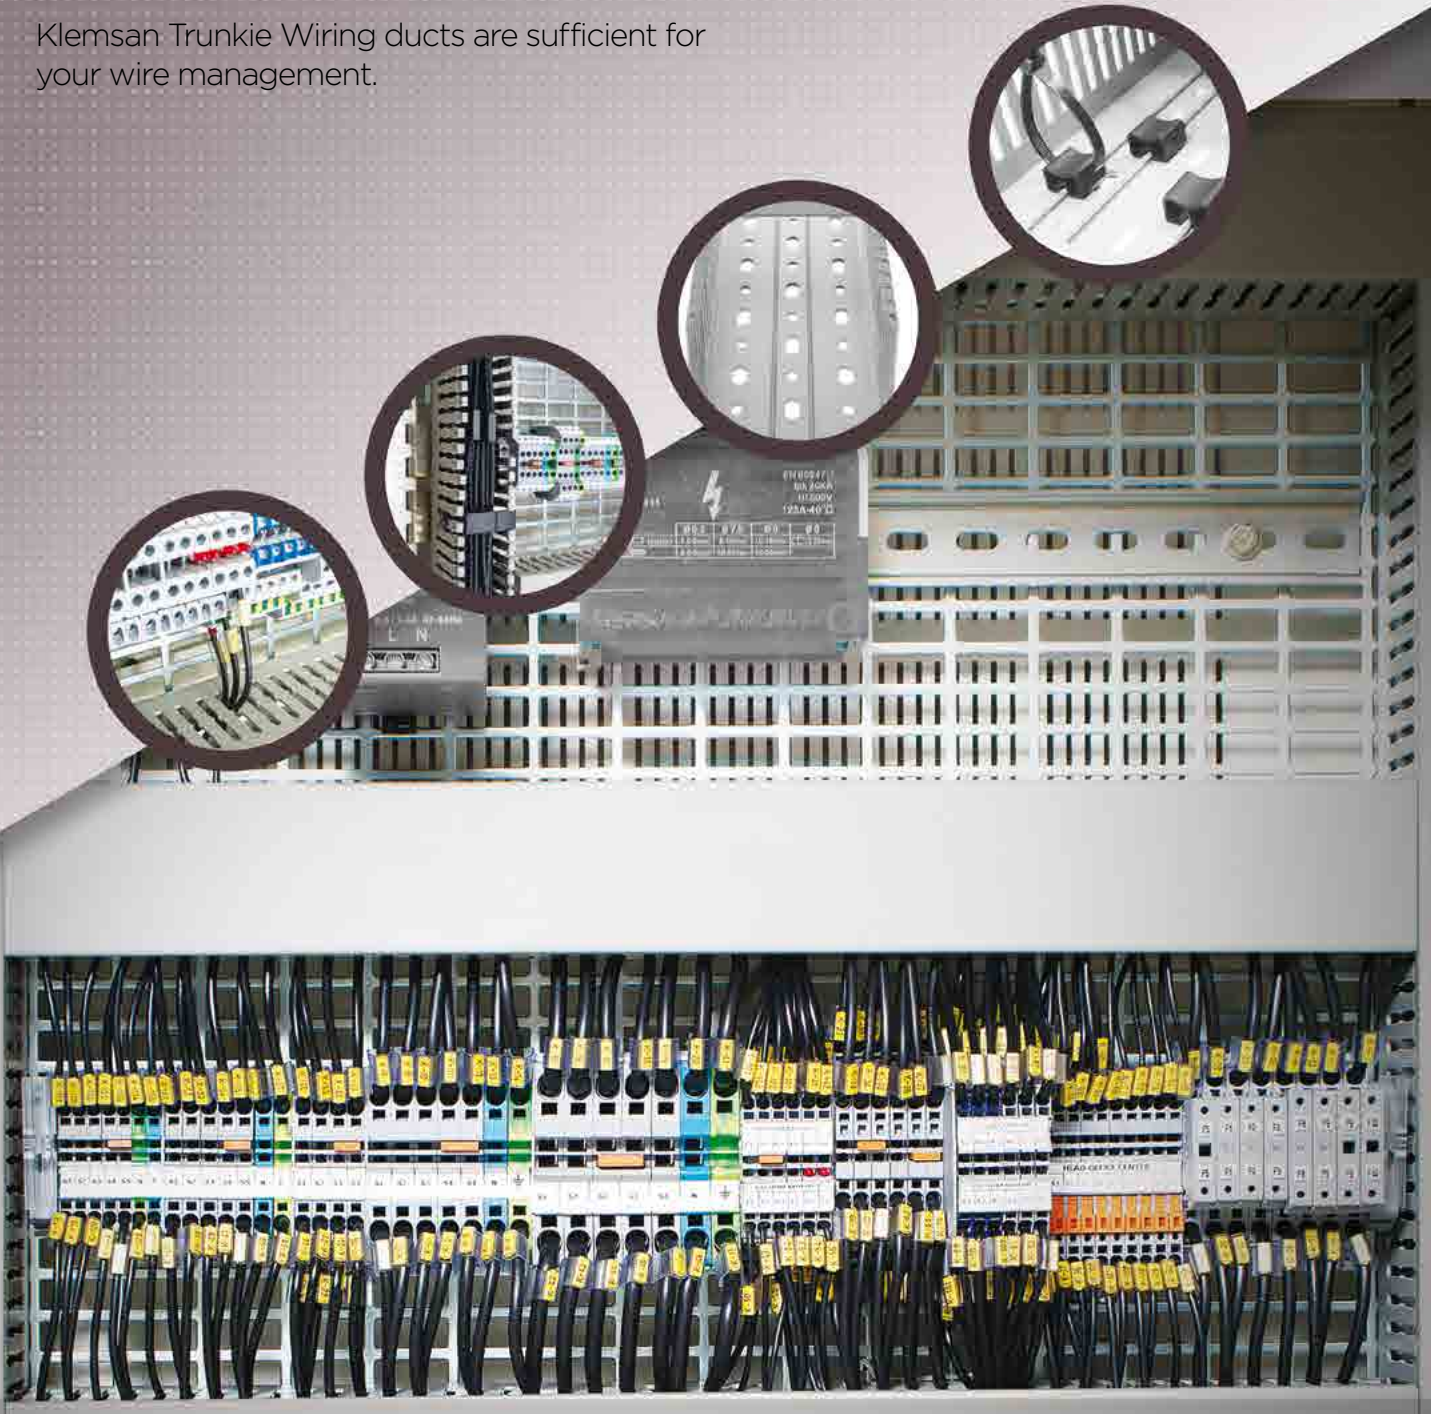

Wiring Ducts with Klemsan Difference

Five Important Reasons to Choose Klemsan Trunkie

1. Ergonomically designed wiring ducts cover are easily mounted and dismantled
2. Upper scoreline provides easy breaking off the ribs as a result of 90 bending
3. Lower score line provides easy splitting of wiring ducts base and wall
4. Bottom rail provides easy mounting of wiring ducts accessories inside the duct
5. Special rib pattern design allows more proper wire placement.

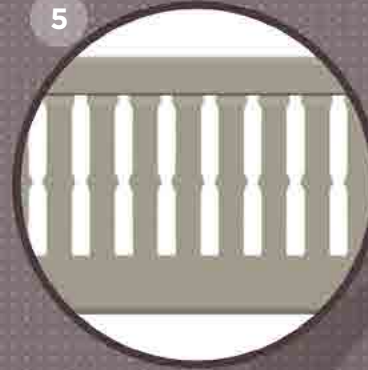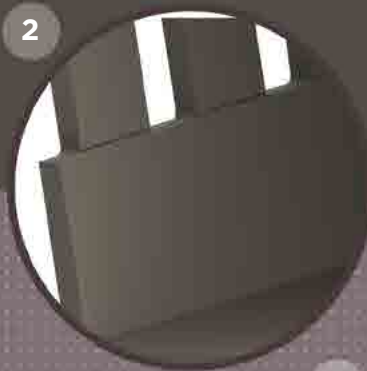


PRACTICAL (DIS) ASSEMBLY OF THE DUCT COVER

(Dis) Assembly of the covers is the most difficult operation when the ducts are fully wired. Design of Trunkie speeds up your work and makes (dis) assembly of the cover easier.



DURABLE AND RELIABLE

Trunkie enables the end-user to use the maximum inner space of the duct and keeps its rigidity even at this maximum load of cables.

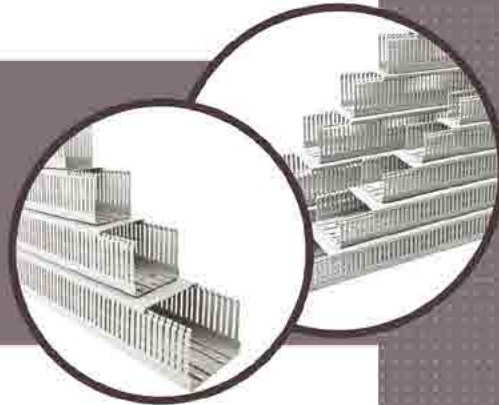


SPEED AND EFFICIENCY

Without using any hand tools you can bend the duct ribs up to 90 degrees angle and easily break them off inside of the panel. Furthermore Trunkie helps you to save time while you break off a group of ribs.




THE SOLUTIONS, WHICH EASE WIRING

Now wire management is much easier. You can easily mount wire retainers on the bottom rail of the duct, and slide them on the bottom rail.

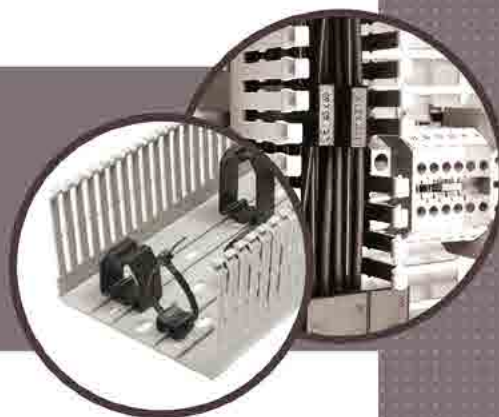


APPEARANCE

Special rib pattern allows the end-user to make cable grouping even on the entry level.

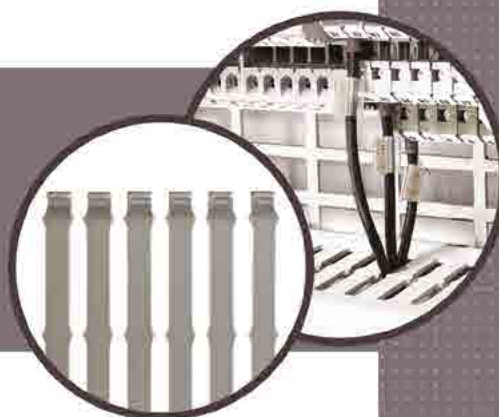


PRODUCT CHARACTERISTICS

- Operating temperature range -15°C 60°C
- Standard length 2 meters
- Color options: RAL 7030 grey
- In compliance with RoHS directive
- In compliance with IEC 60695-2-1 and EN 50085-2-3 standards
- Certificates VDE, UL, cULus, CE and GOST
- Wide product range

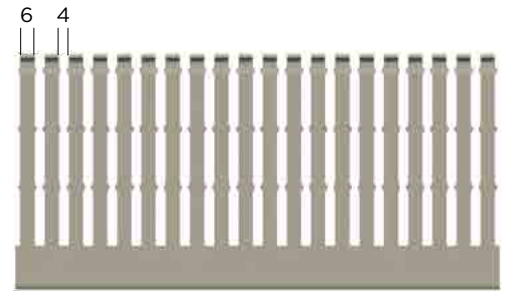

NARROW SLOTTED

Order Code	Type	Dimensions (mm) WxH	Color	Description	Quantity
551010	KKC 2530	25x30	Grey	KKC 2530 25x30 Slotted Wiring Ducts	50x2 m
551011	KKC 2540	25x40	Grey	KKC 2540 25x40 Slotted Wiring Ducts	50x2 m
551012	KKC 2560	25x60	Grey	KKC 2560 25x60 Slotted Wiring Ducts	30x2 m
551030	KKC 2580	25x80	Grey	KKC 2580 25x80 Slotted Wiring Ducts	28x2 m
551031	KKC 2510	25x100	Grey	KKC 2510 25x100 Slotted Wiring Ducts	22x2 m
551013	KKC 4040	40x40	Grey	KKC 4040 40x40 Slotted Wiring Ducts	26x2 m
551014	KKC 4060	40x60	Grey	KKC 4060 40x60 Slotted Wiring Ducts	18x2 m
551015	KKC 4080	40x80	Grey	KKC 4080 40x80 Slotted Wiring Ducts	20x2 m
551032	KKC 4010	40x100	Grey	KKC 4010 40x100 Slotted Wiring Ducts	14x2 m
551016	KKC 6040	60x40	Grey	KKC 6040 60x40 Slotted Wiring Ducts	18x2 m
551017	KKC 6060	60x60	Grey	KKC 6060 60x60 Slotted Wiring Ducts	12x2 m
551018	KKC 6080	60x80	Grey	KKC 6080 60x80 Slotted Wiring Ducts	12x2 m
551033	KKC 6010	60x100	Grey	KKC 6010 60x100 Slotted Wiring Ducts	18x2 m
551034	KKC 8040	80x40	Grey	KKC 8040 80x40 Slotted Wiring Ducts	18x2 m
551019	KKC 8060	80x60	Grey	KKC 8060 80x60 Slotted Wiring Ducts	14x2 m
551020	KKC 8080	80x80	Grey	KKC 8080 80x80 Slotted Wiring Ducts	12x2 m
551035	KKC 8010	80x100	Grey	KKC 8010 80x100 Slotted Wiring Ducts	12x2 m
551021	KKC 1006	100x60	Grey	KKC 1006 100x60 Slotted Wiring Ducts	10x2 m
551022	KKC 1008	100x80	Grey	KKC 1008 100x80 Slotted Wiring Ducts	8x2 m
551036	KKC1001	100x100	Grey	KKC 1001 100x100 Slotted Wiring Ducts	12x2 m
551023	KKC 1206	120x60	Grey	KKC 1206 120x60 Slotted Wiring Ducts	8x2 m
551024	KKC 1208	120x80	Grey	KKC 1208 120x80 Slotted Wiring Ducts	6x2 m
551025	KKC 1201	120x100	Grey	KKC 1201 120x100 Slotted Wiring Ducts	10x2 m
551040	KKC 1501	150x100	Grey	KKC 1501 150x100 Slotted Wiring Ducts	8x2 m

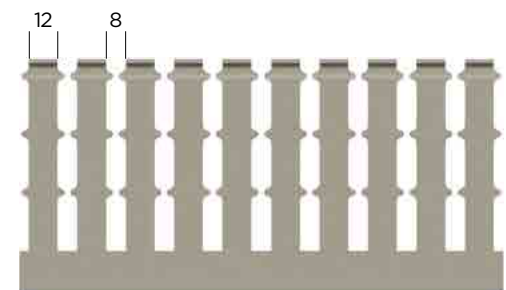

WIDE SLOTTED

Order Code	Type	Dimensions (mm) WxH	Color	Description	Quantity
551111	KKC 4010	40x100	Grey	KKC 4010 40x100 Wide Slotted Wiring Ducts	14x2 m
551112	KKC 6010	60x100	Grey	KKC 6010 60x100 Wide Slotted Wiring Ducts	18x2 m
551113	KKC 8010	80x100	Grey	KKC 8010 80x100 Wide Slotted Wiring Ducts	12x2 m
551114	KKC 1001	100x100	Grey	KKC1001 100x100 Wide Slotted Wiring Ducts	12x2 m
551115	KKC 1201	120x100	Grey	KKC 1201 120x100 Wide Slotted Wiring Ducts	10x2 m
551116	KKC 1501	150x100	Grey	KKC 1501 150x100 Wide Slotted Wiring Ducts	8x2 m

*: Wiring ducts are sold with covers



WIRING DUCTS COVER

Order Code	Type	Dimensions (mm) WxH	Color	Description	Quantity
551050	KKK 25	25	Grey	KKK 25 mm Wiring Ducts Cover	10x2 m
551051	KKK 40	40	Grey	KKK 40 mm Wiring Ducts Cover	10x2 m
551052	KKK 60	60	Grey	KKK 60 mm Wiring Ducts Cover	10x2 m
551053	KKK 80	80	Grey	KKK 80 mm Wiring Ducts Cover	10x2 m
551054	KKK 100	100	Grey	KKK 100 mm Wiring Ducts Cover	10x2 m
551055	KKK 120	120	Grey	KKK 120 mm Wiring Ducts Cover	10x2 m
551056	KKK 150	150	Grey	KKK 150 mm Wiring Ducts Cover	10x2 m


WIRING DUCTS ACCESSORIES

553315	KKT 25	40x40	Black	KKT 4040 40x40 Cable Retainer	10
553325	KKT 40	40x60	Black	KKT 4060 40x60 Cable Retainer	10
553335	KKT 60	60x80	Black	KKT 6080 60x80 Cable Retainer	10
553405	KKB	15x11	Black	KKB Cable Clamp	10
553415	KKM	83.6x14	Black	KKM Cable Holder	10
553500	SETR	-	-	Setting Tool for Rivets	1
553600	PPE 6.5	6.5 mm	Grey	Body - Bound Rivet*	100

*= Drilling Ø on the panel surface should be 6,00 - 6,2 mm so rivets are firmly held on the surface.

WIRING DUCTS CUTTERS


Order Code	Type	Description	Quantity
553220	KMK 1002	Flat cutting up to 120 mm width wiring ducts	1
553230	KKMR	Wiring ducts cutter	1

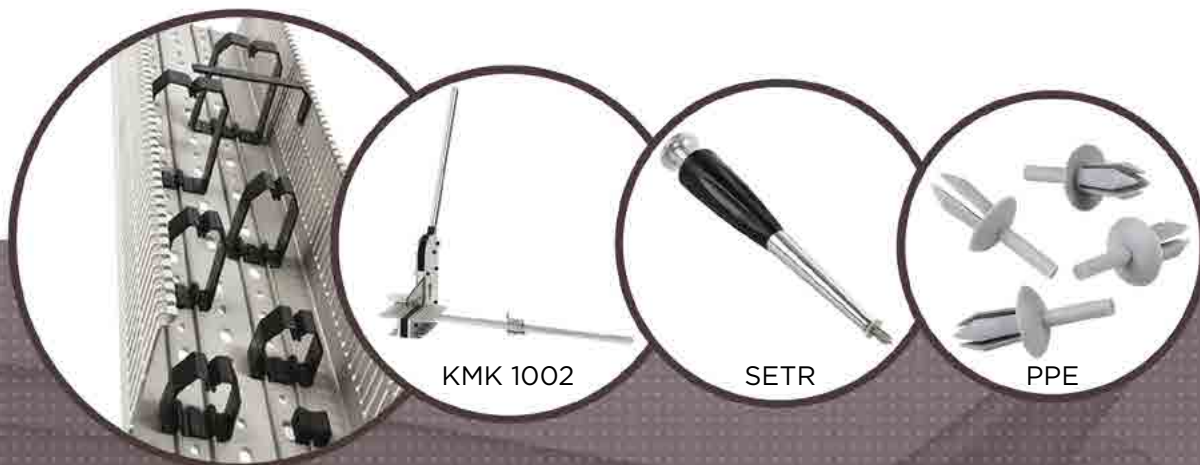


Technical Data




Wiring Ducts

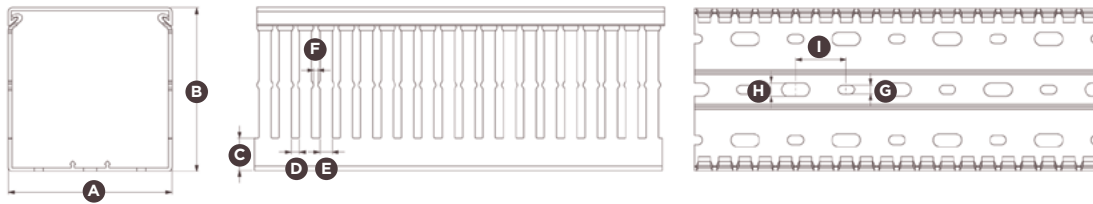


Cable Retainer

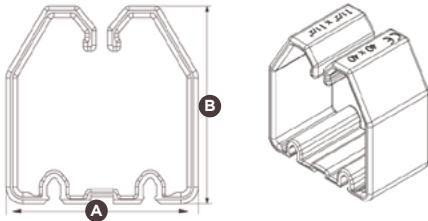

Cable Clamp

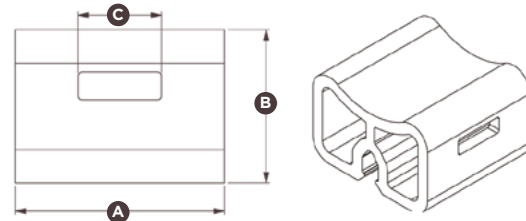

Cable Holder

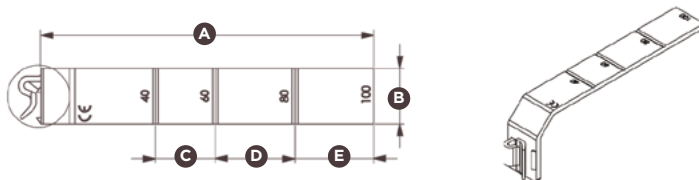

Klemsan
Trunkie

Order Code	Type	Description	Dimensions (mm)								
			A	B	C	D	E	F	G	H	I
551010	KKC 2530 - Narrow	Wiring Ducts	25	30	11,4	4	6	2,1	4,5	6,5	25
551011	KKC 2540 - Narrow	Wiring Ducts	25	40	12,4	4	6	2,1	4,5	6,5	25
551012	KKC 2560 - Narrow	Wiring Ducts	25	60	13,6	4	6	2,1	4,5	6,5	25
551030	KKC 2580 - Narrow	Wiring Ducts	25	80	15,8	4	6	2,1	4,5	6,5	25
551031	KKC 2510 - Narrow	Wiring Ducts	25	100	17,9	4	6	2,1	4,5	6,5	25
551032	KKC 4010 - Narrow	Wiring Ducts	40	100	17,9	4	6	2,1	4,5	6,5	25
551111	KKC 4010 - Wide	Wiring Ducts	40	100	17,9	8	12	2,1	4,5	6,5	25
551013	KKC 4040 - Narrow	Wiring Ducts	40	40	12,4	4	6	2,1	4,5	6,5	25
551014	KKC 4060 - Narrow	Wiring Ducts	40	60	13,6	4	6	2,1	4,5	6,5	25
551015	KKC 4080 - Narrow	Wiring Ducts	40	80	15,8	4	6	2,1	4,5	6,5	25
551033	KKC 6010 - Narrow	Wiring Ducts	60	100	18,0	4	6	2,1	4,5	6,5	25
551112	KKC 6010 - Wide	Wiring Ducts	60	100	18,0	8	12	2,1	4,5	6,5	25
551016	KKC 6040 - Narrow	Wiring Ducts	60	40	12,6	4	6	2,1	4,5	6,5	25
551017	KKC 6060 - Narrow	Wiring Ducts	60	60	13,8	4	6	2,1	4,5	6,5	25
551018	KKC 6080 - Narrow	Wiring Ducts	60	80	15,8	4	6	2,1	4,5	6,5	25
551035	KKC 8010 - Narrow	Wiring Ducts	80	100	18,2	4	6	2,1	4,5	6,5	25
551113	KKC 8010 - Wide	Wiring Ducts	80	100	18,2	8	12	2,1	4,5	6,5	25
551031	KKC 8040 - Narrow	Wiring Ducts	80	40	12,6	4	6	2,1	4,5	6,5	25
551019	KKC 8060 - Narrow	Wiring Ducts	80	60	13,8	4	6	2,1	4,5	6,5	25
551020	KKC 8080 - Narrow	Wiring Ducts	80	80	15,8	4	6	2,1	4,5	6,5	25
551036	KKC 1001 - Narrow	Wiring Ducts	100	100	18,2	4	6	2,1	4,5	6,5	25
551114	KKC 1001 - Wide	Wiring Ducts	100	100	18,2	8	12	2,1	4,5	6,5	25
551021	KKC 1006 - Narrow	Wiring Ducts	100	60	16	4	6	2,1	4,5	6,5	25
551022	KKC 1008 - Narrow	Wiring Ducts	100	80	16	4	6	2,1	4,5	6,5	25
551025	KKC 1201 - Narrow	Wiring Ducts	120	100	18,4	4	6	2,1	4,5	6,5	25
551115	KKC 1201 - Wide	Wiring Ducts	120	100	18,4	8	12	2,1	4,5	6,5	25
551023	KKC 1206 - Narrow	Wiring Ducts	120	60	16,3	4	6	2,1	4,5	6,5	25
551024	KKC 1208 - Narrow	Wiring Ducts	120	80	16,3	4	6	2,1	4,5	6,5	25
551040	KKC 1501 - Narrow	Wiring Ducts	150	100	18,5	4	6	2,1	4,5	6,5	25
551116	KKC 1501 - Wide	Wiring Ducts	150	100	18,5	8	12	2,1	4,5	6,5	25
553315	KKT 40 x 40	Cable Retainer	34	35							
553325	KKT 40 x 60	Cable Retainer	34	53							
553335	KKT 60 x 80	Cable Retainer	53	75							
553405	KKB	Cable Clamp	15	11	6						
553415	KKM	Cable Holder	83,6	14	15	20	19,8				

* KKM is compatible with 40, 60, 80 and 100 mm width wiring ducts.



Factory

Kemalpaşa Yolu 3. Km 35170
İZMİR / TURKEY
Tel : (+90 232) 877 08 00
Fax: (+90 232) 877 08 06

Sales Head Office

Perpa A Blok K:2 No:9/0041
Okmeydanı - İstanbul / TURKEY
Tel : (+90 212) 222 52 00
Fax: (+90 212) 222 66 55

OVERSEAS OFFICES



Russian Federation

Moscow

107140, V. Krasnoselskaya 3,
b.1, office 503
Tel / Fax: +7 495 956-22-63

St. Petersburg

194044, B. Sampsonievskiy pr. 32
Tel: +7 812 969-44-63

Ekaterinburg

620141, per. Melkovsky 5, litera B
Tel : +7 343 266-70-11
Tel : +7 343 219-10-30



USA

255 West Martin Luther King Blvd.
Unit 1511 28202 - Charlotte NC.
Tel: +1 980 226 06 88



India

Unit no. 1A - 1B Chandrabhau
637/A Deccan Gymkhana
Pune 411005 Maharashtra
Tel : +91 735 001 39 97



U.A.E.

Z Building Z 57 Saif Zone Sharjah
Tel : +971 6-557 37 10
Mobile : +971 56-760 28 37



Ukraine

6-8A, Yaroslava Ivashkevicha str.
Office 7-8 04074, Kiev
Tel: +380 637 217 185



Colombia

Carrera 1C #25-15, Torre
Marina Club, Torre B, 1002
Santa Marta, Magdalena
Mobile: +57 3164483019



P.R.China

SOHO Plaza, 360 Hengtong Road,
20th Floor, Suite 20B04, Zip: 200070
SHANGHAI, CHINA
Tel : +86-21-62260338
Fax: +86-21-62263983

