




TEKGROUP

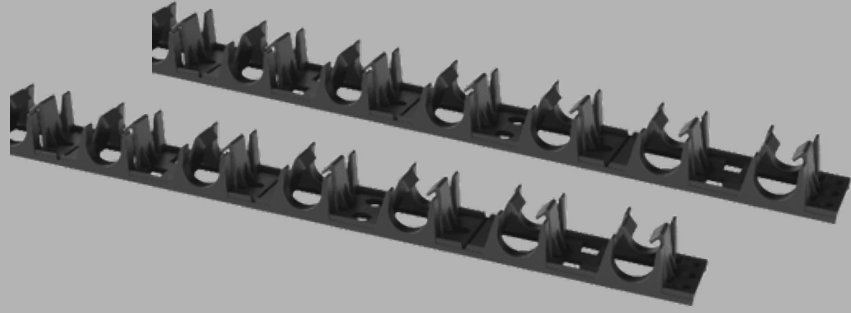

Tekwarm Clip-Rail

Universal clip-rail with self-adhesive tape for UFH pipework

Tekwarm Clip-Rail is designed to secure underfloor heating pipework at regular 50 mm intervals during installation.

The rail is supplied in 1000 mm lengths, made up of 2 x 500 mm sections, allowing the installer to position and align pipework accurately in accordance with the UFH design layout.

Installation Notes

- Clip-rail should be installed in accordance with the Tekwarm UFH design and project specification.
- Self-adhesive fixing is dependent on the condition and suitability of the receiving surface.
- Do not install onto dusty, wet, loose, uneven, contaminated or unstable surfaces.
- Do not use the clip-rail as a substitute for correct pipe setting out.
- Additional fixings may be required where adhesion is reduced or where pipework is under increased tension.
- The installer must ensure the rail remains securely fixed before screed, levelling compound or the specified floor build up is installed.

Storage

- Store in original packaging.
- Keep dry and protected from site damage.
- Store away from direct weather exposure, excessive heat and moisture.
- Do not use damaged or distorted clip-rail sections.

TEKWARM

Product Description

Universal polypropylene clip-rail with self-adhesive tape.

Designed to hold UFH pipework in position before screed, levelling compound or the specified floor build up is installed.

How to Use

Ensure the receiving surface is clean, dry, stable and free from dust, loose material, oil, grease or contamination.

Set out the clip-rail positions in accordance with the UFH design, pipe centres and manifold layout.

Remove the backing from the self-adhesive tape.

Position the clip-rail onto the receiving surface and press firmly into place.

Ensure the rail is fully bonded to the surface before installing the UFH pipework.

Clip the UFH pipe into the rail at the required spacing intervals.

Use additional rail or pipe clips around bends, returns, manifold areas and any locations where the pipe may be under tension.

Check that the pipe is fully seated and cannot lift, twist or move during the installation process.

Pressure test the UFH pipework before the floor is covered.

Suitable For

Tekwarm UFH systems where pipework needs to be securely positioned before the floor build up is completed.

Suitable for use with UFH pipe layouts requiring regular pipe spacing at 50 mm intervals.

Suitable for screeded floor constructions, subject to the receiving surface being suitable for self-adhesive fixing.

TEKGROUP

Unit 1 Power Park, Commercial Road,
Goldthorpe Industrial Estate,
Rotherham,
S63 9NBL

T: 01709 261 007

www.thetekgroup.co.uk

Product	Material	Fixing Type	Pipe Spacing Intervals	Product Dimensions	Supplied Length	Net Weight
Tekwarm Clip-Rail	Polypropylene	Self-adhesive tape	50 mm	1000 x 45 x 29 mm	1000 mm, consisting of 2 x 500 mm sections	185 g