




TEKGROUP

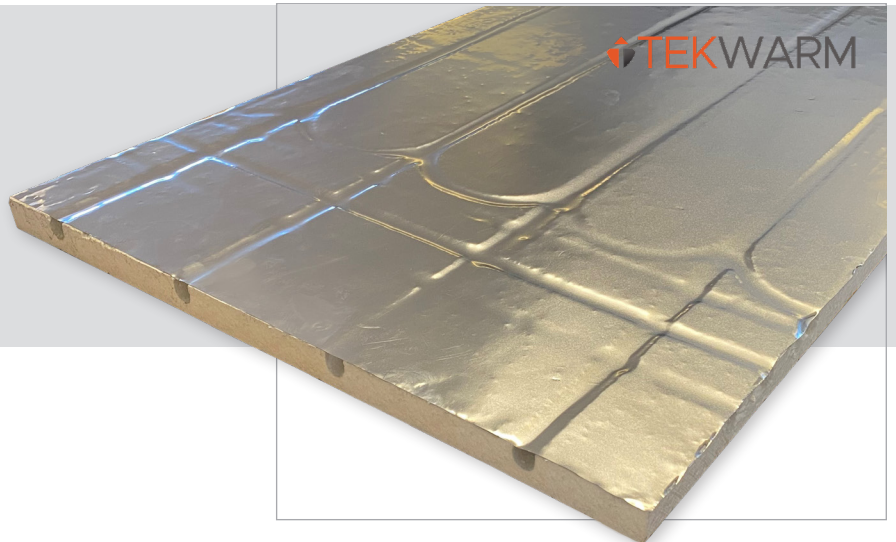

TEKWARM

FOILED CR 400 KPA UFH BOARD

Lightweight 400 KPA grade Expanded Polystyrene insulation routed on one side to allow for fast and accurate pipe installation.

Boards are available with the TFF (Top Foil Faced) finish, where the foil is flat and overlays the board without entering the grooves.

Tekwarm EPS UFH Board is manufactured from CFC and HCFC free EPS, grooved on one face as required at 150mm or 200mm centres, to suit 16mm diameter underfloor heating pipes, with radius returns as standard.

The panel size is 1200mm x 600mm and boards are available in a range of thicknesses starting at 20mm.

Other routed pipe layouts and patterns are available, further details upon request.

TEKGROUP

Unit 1 Power Park, Commercial Road,
Goldthorpe Industrial Estate Rotherham,
S63 9BL

T: 01709 261 007
www.thetekgroup.co.uk

INSTALLATION

Tekwarm Foiled CR 400 KPA UFH Boards allow for a speedy installation over a solid ground floor on a suitable DPM. The boards are also suitable for use over other substrates when installed in a fully supported application, with a DPM as necessary.

SUITABLE FOR

Tekwarm Foiled CR 400 KPA UFH Board is suitable for use in new build or retro fit installations.

DURABILITY

Tekwarm Foiled CR 400 KPA UFH Boards are designed to last for the life of the building without any loss in thermal performance and is rot proof and will not promote the growth of mould or fungi.

ENVIRONMENTAL

Tekwarm Foiled CR 400 KPA UFH Boards (insulation only) has a Global Warming Potential (GWP) of zero, and a low O-Zone Depletion Potential (ODP).