

2020 BC-5 SW & DW

BY BCROASTERS.COM

THE 2020 BC-5 COMES IN YOUR CHOICE OF SINGLE OR DOUBLE WALL DRUM MODELS. THE BIGGEST ADVANTAGE OF THE DW MODELS IS ITS ABILITY TO DO SMALLER BATCHES FOR SAMPLES. THE BC-5 IS OUR BEST SELLING ROASTER GREAT FOR A COFFEE SHOP OR A HOME STARTUP BUSINESS. IT CAN ROAST FROM 8OZ. TO 5LB. PER ROAST ON THE DOUBLE WALL UNIT (16OZ.-5LB. ON SW) AND UP TO 5 ROASTS PER HOUR ON THE GAS MODELS. MANY ARE ROASTING OVER 5LB. PER ROAST IN THE GAS MODELS. IT HAS ALL THE FEATURES MOST COMPANIES CHARGE EXTRA FOR BUILT INTO THE BASE PRICE. PRECISE AIRFLOW CONTROL VIA THE MDDS (MANUAL DAMPER) SYSTEM. SOLID HEAVY-DUTY STAINLESS STEEL DRUM AND BUILT IN PROFILING SYSTEM VIA ARTISAN OR CROPSTER FOR BT & ET. DIRECT-CONNECT CHAFF UNIT FOR GREATER EFFICIENCY & REDUCED FOOTPRINT. COMES IN CHOICE OF GAS OR ALL ELECTRIC. NOW IN BLACK, RED & WHITE BODY COLORS!



BC-5MD	GAS TYPE	ELECTRIC
Batch Size	8oz-5lb.	8oz-4.4lb
Roasting Time	9-14 minutes	15min.
Production	20-25lb.hr	20lb. hr.
Heat Source	NG/LPG	electric
Voltage	220V	220V
Wattage	295W	5295W
Drum Motor	90W	60W
Chaff Fan Motor	45W	45W
Cooling Fan Motor	90W	90W
MIXING ARM	15W	15W
BTU	45,000	
NG PRESSURE	7-12WC	
LPG PRESSURE	MAX. 16-20WC	
Gas Consumption	0.4kg/hr	
Roaster Dim.	42x27x39	42x27x39
Roaster Weight	353lb.	353lb.



FEATURES



DRUM TYPE
DATA LOGGING
THERMOCOUPLES
CONTROL PANEL
WARRANTY
PARTS AVAILABLE
110V CONVERTER

Single wall 304SS Drum 4mm
2 OMRON CONTROLS w/BT & ET
K-TYPE for BT & ET
BT & ET VEIW ON PANEL
1 YEAR PARTS & INSTRUCTION
10 Year Parts Available Guarantee
110V Voltage Converter 100W

NOW IN OPTIONAL DOUBLE WALL DRUM MODELS!

BCROASTERS.COM INFO@BUCKEYECOFFEE.COM 844.522.6333

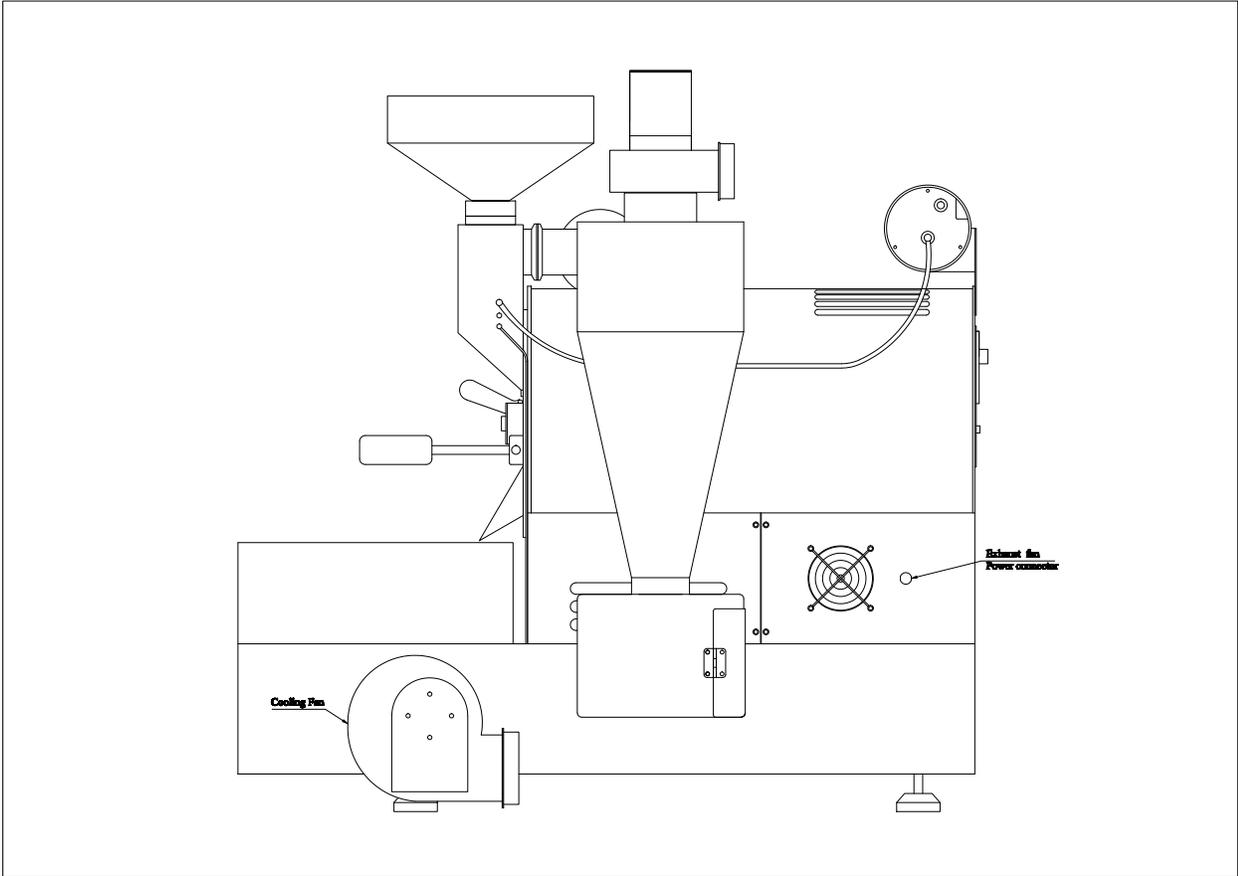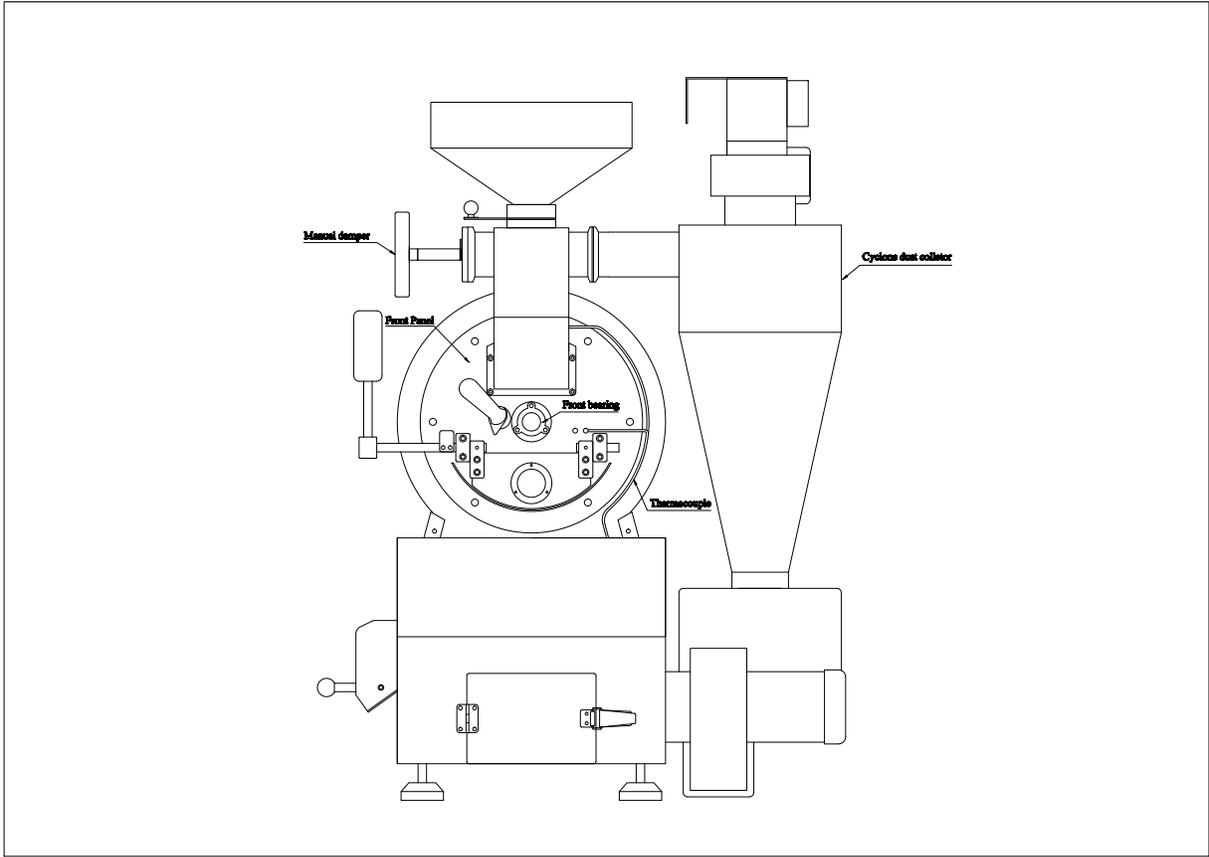

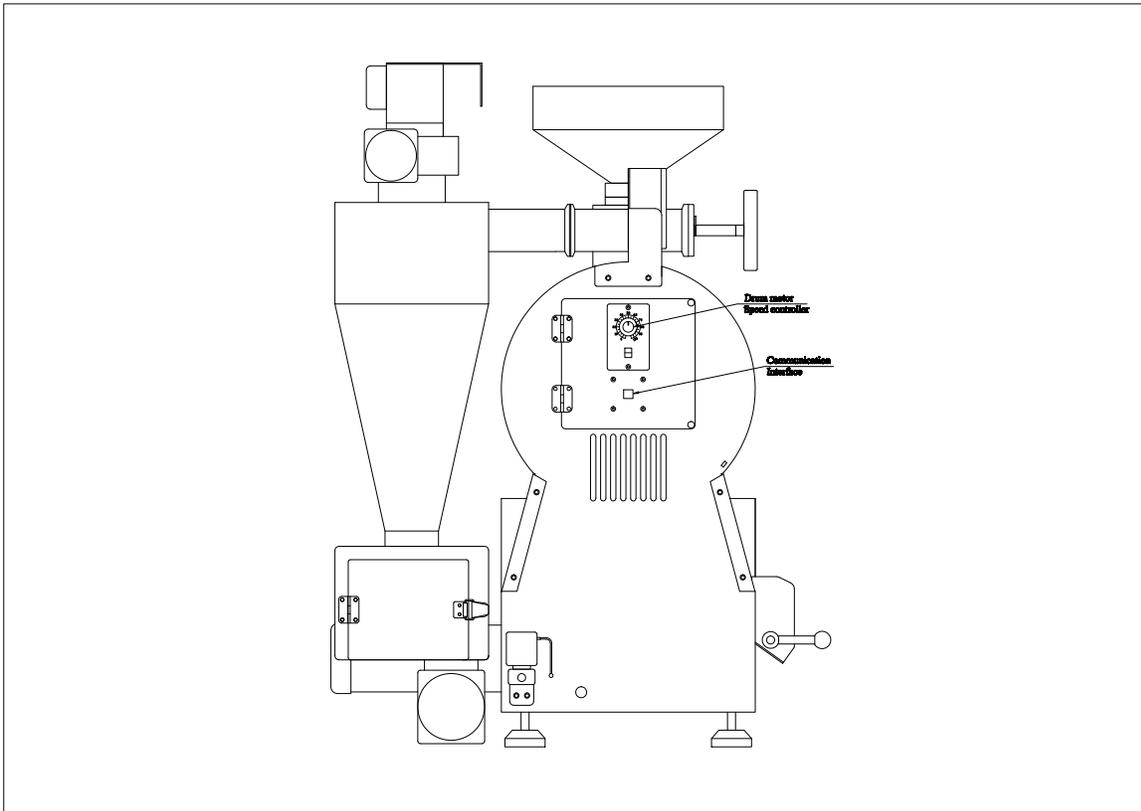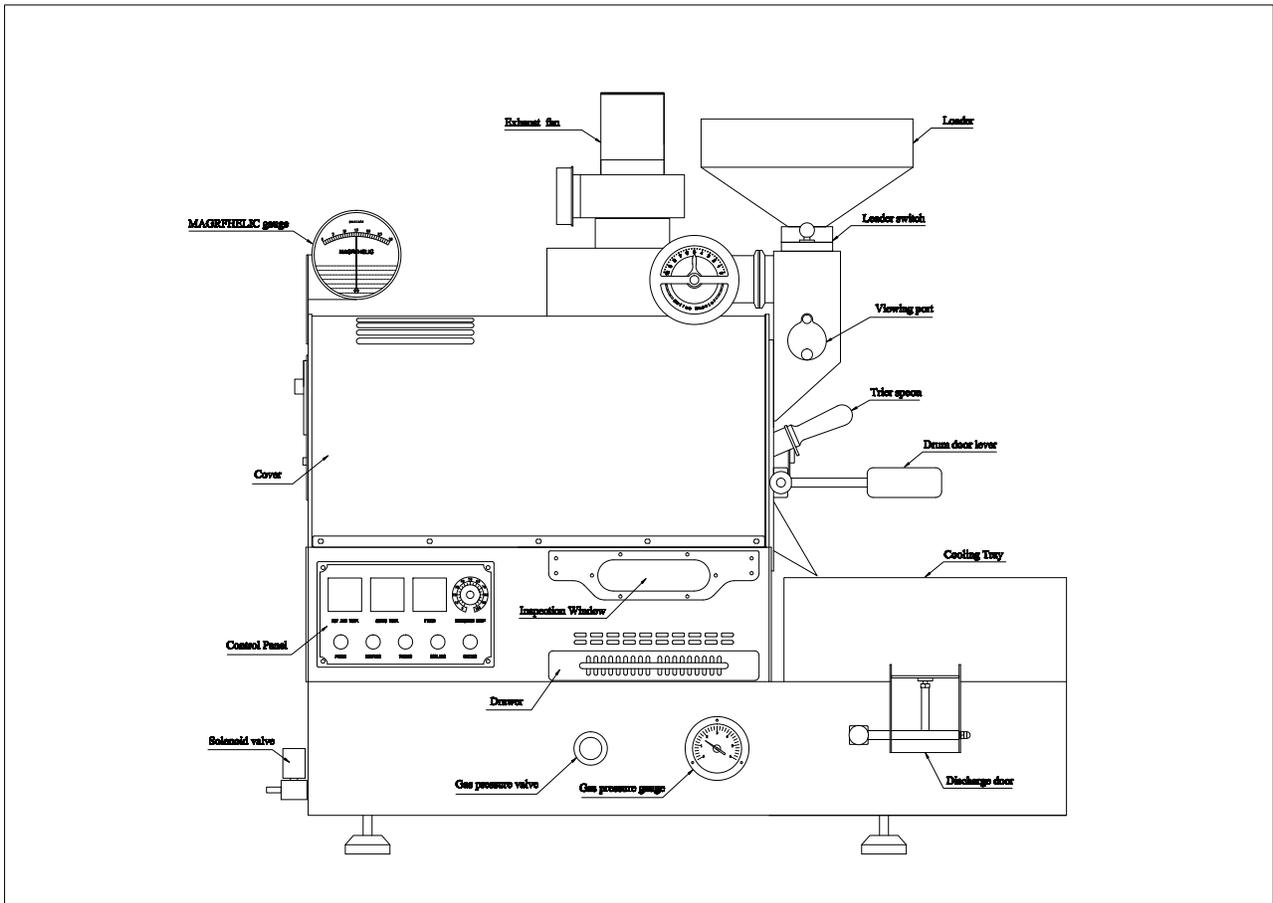

BC-5 COMMERCIAL COFFEE ROASTER

*TABLETOP OR STAND MODEL (18-24" STAND SUGGESTED)
 *DIRECT CONNECT CHAFF UNIT FOR SMALLER FOOTPRINT
 *CHOICE OF ALL ELECTRIC OR GAS MODELS

SIZE SETUP (LxWxH)	42X27X39" (INCLUDES DIRECT CONNECT CHAFF UNIT IN MEASUREMENT)
WEIGHT	353LB
MINIMUM CLEARANCE FROM COMBUSTABLE MATERIALS	18-24"
ROASTING CAPACITY	1-5LB SINGLE WALL 8OZ TO 5LB DOUBLE WALL
ROAST TIME & ROASTS PER HOUR	9-14 MINUTES (5 ROASTS PER HOUR GAS. 3.5 PER HOUR ELECTRIC)
DRUM INFORMATION	SW DRUM: 4MM SUPERIOR 304SS CONTAINS 18% CHROMIUM AND 8% NICKEL DW DRUM: HAS TWO LAYERS OF 2MM 304SS WITH 4MM OF AIR CUSHION. SS WELDING
ELECTRIC STATS:	GAS MODEL: SINGLE PHASE 220V 50/60HZ 295W REQUIRES STANDARD 15A BREAKER ALL ELECTRIC MODELS: SINGLE PHASE 220V 50/60HZ 5295W REQUIRES 30A DEDICATED BREAKER
ELECTRICAL PLUG TYPE	GAS MODELS: 20A 250V 3 WIRE NEMA 6-20P ELECTRIC TYPE: LOCKING PLUG 250V 30A NEMA L6-30P
FUEL CHOICES ON GAS MODELS	LPG GAS STANDARD WITH MODELS. NATURAL GAS CONVERSION KITS OFFERED FOR CUSTOMER INSTALLATION ONLY.
BURNER INFORMATION ON GAS MODELS	SW BURNERS: 8 STANDARD HD BURNERS DW BURNERS: 10 STANDARD HD BURNERS
BTU REQUIRMENTS	40,000 BTU MINIMUM REQUIRED FOR NG LINE
GAS PRESSURE	LPG: 12-16WC (3-4KPA) MARSHALL 1912/197 REGULATOR RECOMMENDED NG: 7-14WC

EXHAUST SETUP	
EXHAUST PIPE REQUIREMENTS	POSITIVE PRESSURE EXHAUST VENTING WITH MINIMUM CLEARANCE 18-24" FROM COMBUSTABLE MATERIALS
MAXIMUM VENTING LENGTHS	20-25' FROM CHAFF UNIT. DEDUCT 3-5' FOR 45-90 DEGREE PIPE ELBOWS. IF YOU MUST VENT AT LONGER LENGTHS CONSULT A LOCAL TECHNICIAN ON USE OF POSSIBLE BOOSTER FANS
MAXIMUM EXHAUST TEMPERATURES	425-475F
CHAFF UNIT HIGH TEMP.	300-350F
COOLING TRAY HIGH TEMP.	200F
DATA LOGGING VIA ARTISAN OR CROPSTER	BUILT IN DATA LOGGER ATTACHES TO COMPUTER (PC OR MAC) VIA USB OR BLUETOOTH
K TYPE THERMOCOUPLES	BT & ET WITH TWO ADDITIONAL PREDRILLED CAPPED THREADED HOLES TO ADD OR ADJUST LOCATION OF PROBES
MANUFACTURED IN CHINA FOR BC ROASTERS	CUSTOM BUILT FOR BC SPECS IN USA AND OVER 200 LANDS

FOR MORE INFORMATION SEE:

BCROASTERS.COM

HTTP://WWW.BUCKEYECOFFEE.COM/BC-COFFEE-ROASTERS.HTML

**BC ROASTERS
BUCKEYE, ARIZONA 85326
TONOPAH, ARIZONA 85354

TOLL FREE: 844.522.6333
INFO@BUCKEYECOFFEE.COM**

BCROASTERS.COM INFO@BUCKEYECOFFEE.COM 844.522.6333