


# 1-WATT SOLID-STATE RF DRIVER

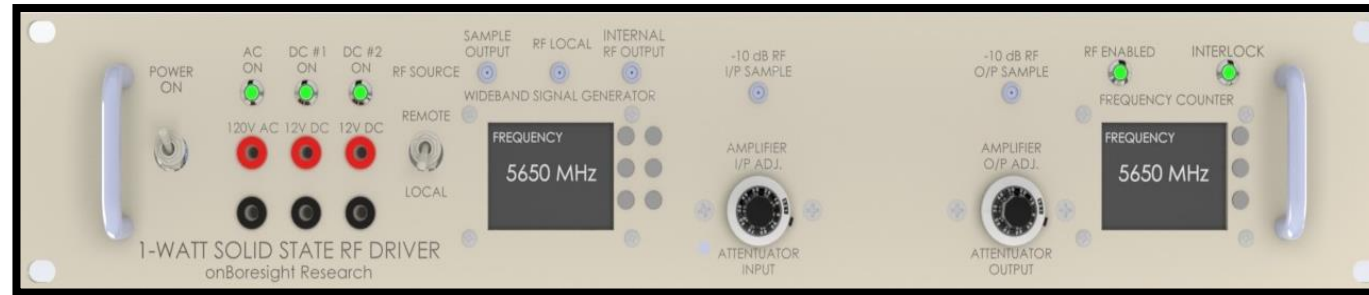

## Specifications: (C-Band version, Model: C-304060)

Input Signal: C-Band (5.4-5.9 GHz) RF, 0 dBm  
 Output Signal: C-Band (5.4-5.9 GHz) RF, 28 dBm min.  
 Gain of Amplifier: 40 dB @ 30 Psat min.  
 Noise Figure of Amplifier: 6 dB max @ 1.5:1 VSWR  
 Total Attenuation of Attenuators: 60 dB  
 Internal Wideband Signal Generator: 500-15000 MHz  
 Input Power: 120 V AC, 60 Hz  
 RF Controls: Two variable attenuators, RF Relay Switch  
 External Logic Control: RF Switch On/Off, Interlock RF Inhibit  
 Test Points: Two RF ports from circulators, DC Power Supply  
 Dimension: 2U on standard 19" rack, Depth: 18"

**Available in L-, S-, C-, and X-Band versions**

Inquire for specifications on each band.



info@onboresighteng.com \$ www.onboresighteng.com \$ 808 378 4212

2970 Haleko Road, Suite #105, Lihue, HI 96766