


# Reboot Router Onsite



## 1 Drive to POD location with a laptop.


The WiFi transmitter should be on the pole with the POD. Open the laptop. Look for and connect to the wireless signal (SSID), usually has the name of your POD with "AP" in it.

WiFi signal name and password is in your system sheet.

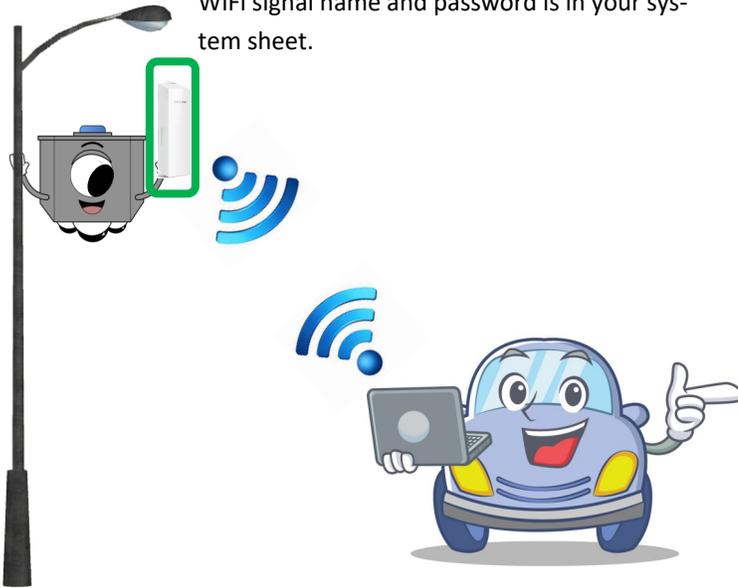


## 2 Open Browser to connect to router.

In the address bar, type 192.168.123.100:8080 and click enter. The router login page will open. Login with the username and password on your system sheet to get into router admin page.

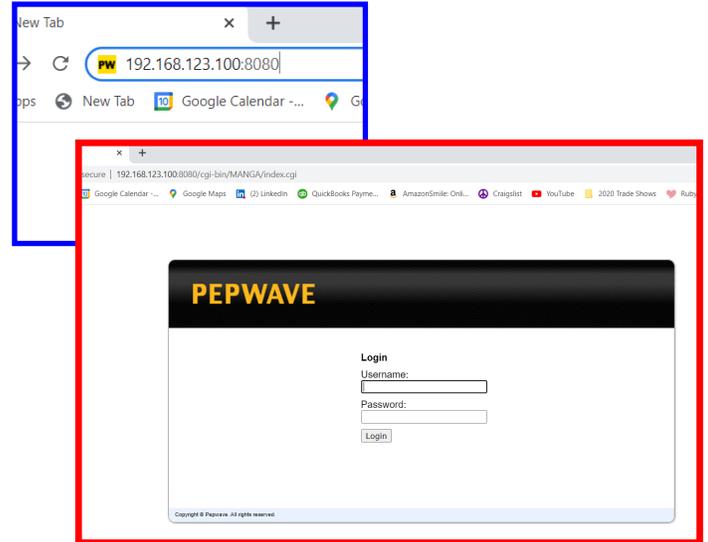

## 3 Choose System in the top menu.

Find Reboot in the side menu. Once in Reboot menu, choose the most current firmware and click Reboot

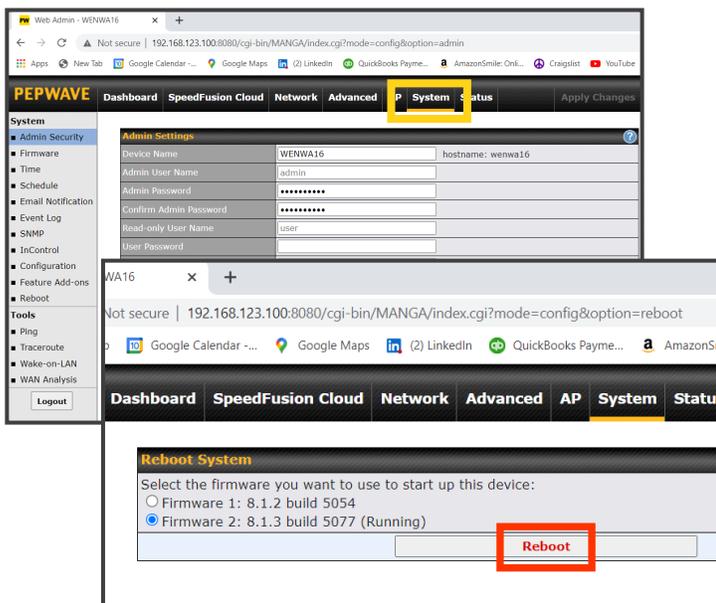

## 4 Wait for the router to come back on and then check to see if it's working.

Open another tab on browser and try to reach general websites like YouTube. If it works, then internet has been established again.

Then open smartphone app and see if you are able to connect to that POD and see the cameras.

