



View Lite II

Adding Servers

Version 1.0


Date Created:

3 JUL 2025


1. After opening View lite II, you will see the view below, click the three lines located in the top left corner.




2. Then, click "Server Config" located near the bottom of the screen.

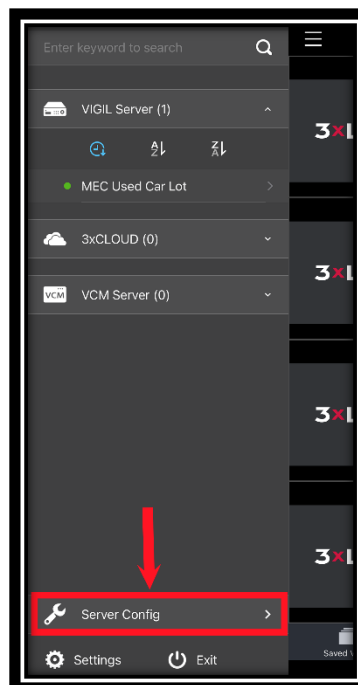

- Next, click “VIGIL Sever” at the top of the options.

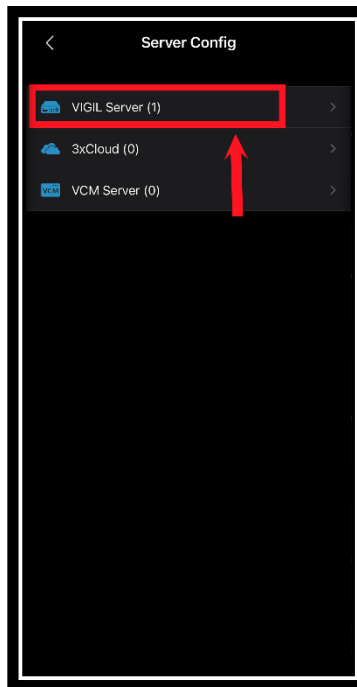

- Now, click the “+” icon in the top right corner of the screen.

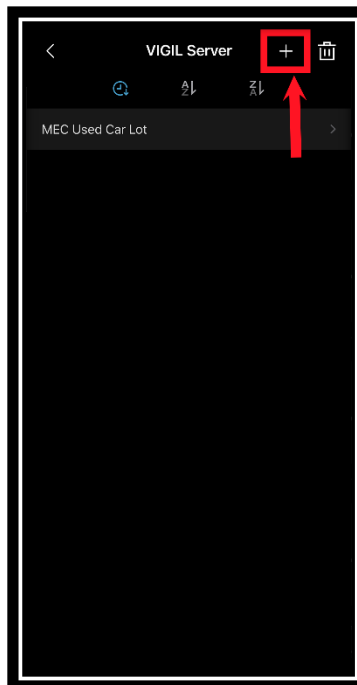

5. This will bring up the page to add a VIGIL server. Begin by naming the site in the description box. You can also check “Use site name for description” if you’d rather it use the default server name.

< MEC Used Car Lot (MEC Used C...

Description

Use Site Name For Description ☒

User Name

Password

VIGIL Connect ☒

Alias/Serial

View Camera List

Camera On Current Server >

Notification >

Save

6. After, enter your Username and Password into the corresponding boxes.

< Add a VIGIL Server

Use Site Name For Description ☒

User Name


Password

VIGIL Connect ☒

Alias/Serial


Save

7. If you have an alias for your VIGIL Server/Recording device, check “Vigil Connect” and enter the alias for your server into the “Alias/Serial” Box.

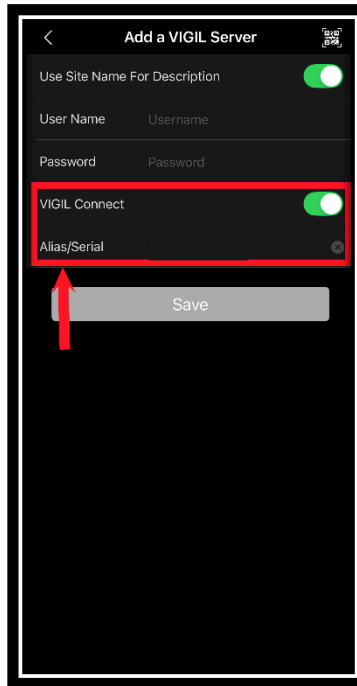

A screenshot of a mobile application screen titled "Add a VIGIL Server". The screen has a dark background with white text. At the top, there is a back arrow and the title. Below the title, there are several settings: "Use Site Name For Description" with a green toggle switch, "User Name" with a text field containing "Username", "Password" with a text field containing "Password", "VIGIL Connect" with a green toggle switch, and "Alias/Serial" with a text field. A red rectangular box highlights the "VIGIL Connect" toggle and the "Alias/Serial" text field. A red arrow points upwards from the "Save" button to the "Alias/Serial" field. The "Save" button is a grey rectangle at the bottom of the form.

8. If you have an IP Address, leave the “Vigil Connect” Box unchecked and enter your IP Address into the “IP or Host” Box and leave the port to the default setting.

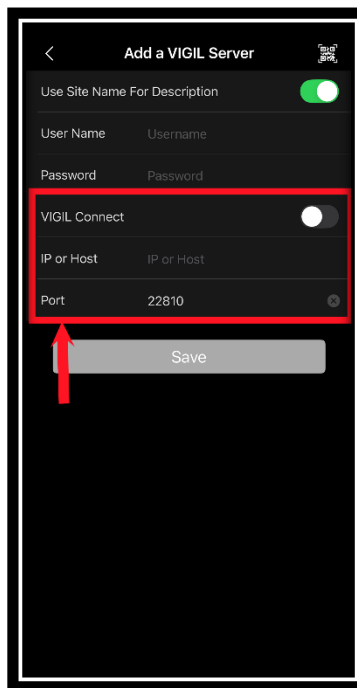

A screenshot of a mobile application screen titled "Add a VIGIL Server". The screen has a dark background with white text. At the top, there is a back arrow and the title. Below the title, there are several settings: "Use Site Name For Description" with a green toggle switch, "User Name" with a text field containing "Username", "Password" with a text field containing "Password", "VIGIL Connect" with a white toggle switch, "IP or Host" with a text field, and "Port" with a text field containing "22810". A red rectangular box highlights the "VIGIL Connect" toggle, the "IP or Host" text field, and the "Port" text field. A red arrow points upwards from the "Save" button to the "IP or Host" field. The "Save" button is a grey rectangle at the bottom of the form.

9. Finally, click "Save". Your VIGIL Server should now show up in your server list, and you can access the cameras for each site you add from here.

