

Notice of variation and consolidation with introductory note

The Environmental Permitting (England & Wales) Regulations 2010

Augean North Limited

Port Clarence Hazardous Landfill Site
Off Huntsman Drive
Stockton-on-Tees
TS2 1UE

Variation application number
EPR/BV1399IT/V009

Permit number
EPR/BV1399IT

Port Clarence Hazardous Landfill Site

Permit number EPR/BV1399IT

Introductory note

This introductory note does not form a part of the notice.

The following gives notice of the variation and consolidation of your environmental permit. We have issued this variation to consolidate the original permit and subsequent variations and to update some of the conditions following a statutory review of permits in the landfill sector. We have also converted the permit into the current EPR permit format using modern conditions.

This Environment Agency has a duty, under the Environmental Permitting (England and Wales) Regulations 2010, regulation 34(1), to periodically review permits. As a result of that review we have identified a number of necessary changes we must make to your permit to reflect current legislation and best practice. These changes principally relate to:

- The addition of a standard condition for landfill gas management at all landfill sites. ;
- A change to the hydrogeological risk assessment condition so that reviews are undertaken every 6 years rather than every 4 years;
- Standard leachate and groundwater quality monitoring tables (schedule 3); and
- A standard reporting table (schedule 4).

Schedule 1 to this notice summarises the changes we have made to this permit.

The status log sets out the permitting history, including any changes to the permit reference number.

Status log of the permit

Description	Date	Comments
Application EPR/BV1399IT/A001 received	09/06/2003	Application for hazardous waste landfill
Permit determined EPR/BV1399IT/A001	27/02/2004	Permit issued to Zero Waste Limited.
Variation application determined EPR/BV1399IT/V002 (billing ref: FP3833BC)	16/07/2004	
Variation application EPR/BV1399IT/V003 (billing ref: HP3135SY) received	09/12/2004	
Variation application	14/02/2005	Variation to increase the waste input to the site

EPR/BV1399IT/V003 (HP3135SY) determined		from 100,000 tonnes/year to 500,000 tonnes/year
Variation application EPR/BV1399IT/V004 (billing ref: KP3737SV) received	15/08/2005	
Application EPR/BV1399IT/V004 (KP3737SV) determined	14/07/2006	Permit variation issued to Augean North Limited. This variation is to permit revised Waste Acceptance Criteria (WAC) in accordance with Schedule 1 of the Landfill (England and Wales (Amendment) regulations 2005 for a set of EWC waste types for acceptance at a landfill
Variation application EPR/BV1399IT/V005 (billing ref: XP3838ML) received	20/09/2006	
Variation application EPR/BV1399IT/V005 (XP3838ML) determined	09/03/2007	The purpose of this variation is to increase the area covered by Port Clarence Hazardous Landfill Site (consequent to a corresponding decrease in the area of the Port Clarence non hazardous landfill site. The total waste input to the site is increased from 1,131,267m ³ (6,500,000 tonnes) but the permitted waste types and rate of input remains unchanged
Variation EPR/BV1399IT/V006 (billing ref:VP3035ML) determined	11/02/2010	Agency initiated template variation
Variation application EPR/BV1399IT/V007 (billing ref.VP3035ML) received	04/11/2011	Add lead 3 x WAC derogation for 190304* and remove derogations for other wastes and parameters
Variation application EPR/BV1399IT/V007 (billing ref:GP3737FQ) determined	06/12/2011	
Variation EPR/BV1399IT/V008 (billing ref: HP3836CY)	30/07/2012	Withdrawn
Environment Agency Landfill Sector Review 2013 Permit reviewed Variation determined EPR/BV1399IT/V009 Permit EPR/BV1399IT	17/01/14 13/10/2014	Varied and consolidated permit issued in modern condition format

End of introductory note

Notice of variation and consolidation

The Environmental Permitting (England and Wales) Regulations 2010

The Environment Agency in exercise of its powers under regulation 20 of the Environmental Permitting (England and Wales) Regulations 2010 varies and consolidates

permit number
EPR/BV1399IT

issued to
Augean North Limited ("the operator")

whose registered office is

4 Rudgate Court
Walton
Near Wetherby
West Yorkshire
LS23 7BF

company registration number **3652506**

to operate a regulated facility at

Port Clarence Hazardous Landfill Site
Off Huntsman Drive
Stockton-on-Tees
TS2 1UE

to the extent set out in the schedules.

The notice shall take effect from 13/10/2014

Name	Date
Alexandra Brocken	13/10/2014

Authorised on behalf of the Environment Agency

Schedule 1

All conditions have been varied by the consolidated permit as a result of an Environment Agency initiated variation. The following table summarises the latest changes to the landfill permit template, however your permit may contain more changes than this where your permit has not been varied to recent template conditions.

Condition	Description of change
1.5	Generic condition to reflect the requirements of the Waste Framework Directive
2.6.1(a)	Added reference to a specific table to clarify what wastes are permitted by which permitted activity
2.6.1(b)	For landfills for hazardous waste - added reference to inert waste to allow covering of hazardous waste with inert waste, where necessary
2.6.2	Added to separately identify the waste types and quantities that can be accepted for restoration
2.9	Revised gas management condition imposed for all landfills.
3.1.1	Generic condition imposed on all activities to simplify sub conditions
3.1.2 and 3.1.3	Generic condition imposed on all activities to simplify sub-conditions. Revised conditions to reflect the terminology used by the Groundwater Directive for 'hazardous substances' and to require hydrogeological risk assessment reviews are submitted every 6 years rather than every 4 years
3.6	Revised generic pests condition imposed on all activities
4.1	Condition: Records, revised
4.2.2	Amended to ensure that information on 'annual production/ treatment' (Schedule 4, Table S4.2) is provided in February each year where annual reports may be submitted at other times of the year
4.2.2(a)	Text expanded to clarify the details we require in an annual report
4.2.2(h)	New condition requiring annual submission of a plan of monitoring and extraction locations with reference to monitoring tables in schedule 3
4.2.2 (j)	New condition Generic condition to reflect the requirements of the Waste Framework Directive
4.3	Generic Notifications condition added
Schedules	
Table S1.1	Amended description of the landfill activity to clarify that this includes restoration. Activity references amended to reflect changes introduced by Industrial Emissions Directive (2010/75/EU)
Table S1.4	Amended to clarify that restoration is a separate part of the activity unrelated to landfill cover
Schedule 2	Existing list of wastes replaced by Standard list of wastes. The following are the waste codes removed together with the reasons for their removal
Schedule 3	Monitoring and compliance tables have been re-ordered so that those with compliance limits appear first. Standard monitoring frequency and parameters have been included for certain routine monitoring requirements
Table S3.3	Specific requirements for monitoring asbestos fibres added, where necessary.
Table S4.1	Amended to only require regular reports of information that relate to compliance limits
Table S4.2	Additional details of landfill gas extracted required to improve climate change data quality

Schedule 6	Definitions added to clarify meaning of: <ul style="list-style-type: none">• Inert waste• Exceeded• Hazardous substance• Medicinal product• Previous year• Waste acceptance criteria• Waste acceptance procedure
------------	--

Schedule 2 – consolidated permit

Consolidated permit issued as a separate document.

Permit

The Environmental Permitting (England and Wales) Regulations 2010

Permit number
EPR/BV1399IT

This is the consolidated permit referred to in the variation and consolidation notice for application EPR/BV1399IT/V009 authorising,

Augean North Limited ("the operator"),

whose registered office is

4 Rudgate Court
Walton
Near Wetherby
West Yorkshire
LS23 7BF

company registration number 3652506

to operate an installation at

Port Clarence Hazardous Landfill Site
Off Huntsman Drive
Stockton-on-Tees
TS2 1UE

to the extent authorised by and subject to the conditions of this permit.

Name	Date
Alexandra Brocken	13/10/2014

Authorised on behalf of the Environment Agency

1. Management

1.1 General management

- 1.1.1 The operator shall manage and operate the activities:
- (a) in accordance with a written management system that identifies and minimises risks of pollution, including those arising from operations, maintenance, accidents, incidents, non-conformances, closure and those drawn to the attention of the operator as a result of complaints; and
 - (b) using sufficient competent persons and resources.
- 1.1.2 Records demonstrating compliance with condition 1.1.1 shall be maintained.
- 1.1.3 Any person having duties that are or may be affected by the matters set out in this permit shall have convenient access to a copy of it kept at or near the place where those duties are carried out.
- 1.1.4 The operator shall comply with the requirements of an approved competence scheme.

1.2 Finance

- 1.2.1 The financial provision for meeting the obligations under this permit set out in the agreement made between the operator and the Environment Agency 16th December 2009 shall be maintained by the operator throughout the subsistence of this permit and the operator shall produce evidence of such provision whenever required by the Environment Agency.
- 1.2.2 The operator shall ensure that the charges it makes for the disposal of waste in the landfill cover all of the following:
- (a) the costs of setting up and operating the landfill;
 - (b) the costs of the financial provision required by condition 1.2.1; and
 - (c) the estimated costs for the closure and aftercare of the landfill.

1.3 Energy efficiency

- 1.3.1 The operator shall:
- (a) take appropriate measures to ensure that energy is used efficiently in the activities;
 - (b) Review and record at least every four years whether there are suitable opportunities to improve the energy efficiency of the activities; and
 - (c) Implement any appropriate measures identified by a review.

1.4 Efficient use of raw materials

- 1.4.1 The operator shall:
- (a) take appropriate measures to ensure that raw materials and water are used efficiently in the activities;
 - (b) maintain records of raw materials and water used in the activities;

- (c) review and record at least every four years whether there are suitable alternative materials that could reduce environmental impact or opportunities to improve the efficiency of raw material and water use; and
- (d) take any further appropriate measures identified by a review

1.5 Avoidance, recovery and disposal of wastes produced by the activities

1.5.1 The operator shall:

- (a) take appropriate measures to ensure that waste produced by the activities is avoided or reduced, or where waste is produced it is recovered wherever practicable or otherwise disposed of in a manner which minimises its impact on the environment;
- (b) review and record at least every four years whether changes to those measures should be made; and
- (c) take any further appropriate measures identified by a review.

2 Operations

2.1 Permitted activities

2.1.1 The operator is only authorised to carry out the activities specified in schedule 1 table S1.1 (the "activities").

2.2 The site

2.2.1 The activities shall not extend beyond the site, being the land shown edged in blue on the site plan at schedule 7 to this permit.

2.3 Operating techniques

- 2.3.1 (a) The activities shall, subject to the conditions of this permit, be operated using the techniques and in the manner described in the documentation specified in schedule 1, table S1.2, unless otherwise agreed in writing by the Environment Agency.
- (b) If notified by the Environment Agency that the activities are giving rise to pollution, the operator shall submit to the Environment Agency for approval within the period specified, a revision of any plan or other documentation ('plan') specified in schedule 1, table S1.2 or otherwise required under this permit, which identifies and minimises the risks of pollution relevant to that plan and shall implement the approved revised plan in place of the original from the date of approval, unless otherwise agreed in writing by the Environment Agency.

2.4 Improvement programme

2.4.1 The operator shall complete the improvements specified in schedule 1, table S1.3 by the date specified in that table unless otherwise agreed in writing by the Environment Agency.

- 2.4.2 Except in the case of an improvement which consists only of a submission to the Environment Agency, the operator shall notify the Environment Agency within 14 days of completion of each improvement.

2.5 Landfill Engineering

- 2.5.1 No construction of any new cell of the landfill shall commence until the operator has submitted construction proposals and the Environment Agency has confirmed that it is satisfied with the construction proposals.
- 2.5.2 Where the operator proposes to construct any new cell other than the first cell, but proposes no change from the design of the most recently approved cell which could have any impact on the performance of any element of the design, no construction of the new cell shall commence until the operator has submitted a cell layout drawing and the Environment Agency has confirmed that it is satisfied with the cell layout drawing.
- 2.5.3 The construction of a new cell shall take place only in accordance with the approved construction proposals unless:
- (a) any change to the approved construction proposals would have no impact on the performance of any element of the design; or
 - (b) a change has otherwise been agreed in writing by the Environment Agency.
- 2.5.4 No disposal of waste shall take place in a new cell until the operator has submitted a CQA Validation Report and the Environment Agency has confirmed that it is satisfied with the CQA Validation Report.
- 2.5.5 No construction of landfill infrastructure shall commence until the operator has submitted relevant construction proposals or a written request to use previous construction proposals and the Environment Agency has confirmed that it is satisfied with the construction proposals.
- 2.5.6 The construction of the landfill infrastructure shall take place only in accordance with the approved construction proposals unless:
- (a) any change to the approved construction proposals would have no impact on the performance of any element of the design; or
 - (b) a change has otherwise been agreed in writing by the Environment Agency.
- 2.5.7 The operator shall submit a CQA Validation Report as soon as practicable following the construction of the relevant landfill infrastructure.
- 2.5.8 Where pollution controls are immediately necessary to prevent an incident or accident, then conditions 2.5.5 and 2.5.6 do not apply and the relevant landfill infrastructure may be constructed, provided that the construction proposals are submitted to the Environment Agency as soon as practicable.
- 2.5.9 For the purposes of conditions 2.5.1, 2.5.2, 2.5.4 and 2.5.5, the Environment Agency shall be deemed to be satisfied where it has not, within the period of four weeks from the date of receipt of the relevant construction proposals or CQA Validation Report, either:
- (a) confirmed whether or not it is satisfied; or
 - (b) informed the operator that it requires further information.

- 2.5.10 Where the Environment Agency has required further information under condition 2.5.9(b), the Environment Agency shall be deemed to be satisfied where it has not, within the period of four weeks from the date of receipt of the further information, either:
- (a) confirmed whether or not it is satisfied; or
 - (b) informed the operator that it requires further information.

2.6 Waste acceptance

- 2.6.1 Wastes shall only be accepted for disposal if:
- (a) they are listed in schedule 2, table S2.1 and
 - (b) they are hazardous waste, or inert waste for cover (table S2.5) and
 - (c) they are not liquid waste (including waste waters but excluding sludge) and
 - (d) they are not waste which in the conditions of landfill is explosive, corrosive, oxidising, highly flammable or flammable, and
 - (e) they are not hospital and other clinical infectious wastes from medical or veterinary establishments, and
 - (f) they are not chemical substances from research and development or teaching activities, for example laboratory residues, which are unidentified and/or which are new and whose effects on man and/or the environment are unknown, and
 - (g) all the relevant waste acceptance procedures have been completed, and
 - (h) they fulfil the relevant waste acceptance criteria, and
 - (i) they have not been diluted or mixed solely to meet the relevant waste acceptance criteria, and
 - (j) they are wastes which have been treated, except for where treatment would not reduce its quantity or the hazards which it poses to human health or the environment, and
 - (k) they fulfil the relevant waste acceptance criteria, except that the leaching limits set out in schedule 2, table S2.3 shall apply to the wastes listed in schedule 3, table S2.2.
- 2.6.2 Wastes shall only be accepted for restoration where:
- (a) they are listed in schedule 2, table S2.4 and
 - (b) they are accepted in accordance with a restoration plan approved in writing by the Environment Agency.
- 2.6.3 The operator shall visually inspect:
- (a) without unloading it, waste that is not in an enclosed container or enclosed vehicle on arrival at the landfill; and
 - (b) waste at the point of deposit;
- and shall satisfy itself that it conforms to the basic characterisation documentation submitted by the holder.
- 2.6.4 Where the operator has taken samples to establish that the waste is in conformity with the documentation submitted by the holder then the samples taken shall be retained for at least one month and results of any analysis for at least two years.

- 2.6.5 The operator on accepting each delivery of waste shall provide a receipt to the person delivering it.
- 2.6.6 The total quantity of waste that shall be deposited in the landfill shall be limited by the pre-settlement levels shown on drawing ref no. AU/PC/08-08/14430.
- 2.6.7 The quantity of waste that is deposited in the landfill in any year shall not exceed the limits in schedule 1 table S1.4.
- 2.6.8 The operator shall maintain and implement a system which ensures that a record is made of the quantity, characteristics, date of delivery and, where practicable, origin of any waste that is received for disposal or recovery and of the identity of the producer, or in the case of municipal waste and multiple collection vehicles, of the collector of such waste. Any information regarded by the operator as commercially confidential shall be clearly identified in the record.
- 2.6.9 The operator shall maintain and implement a system to record the disposal location of any hazardous waste.

2.7 Leachate levels

- 2.7.1 The limits for the level of leachate listed in schedule 3, table S3.1 shall not be exceeded.

2.8 Closure and aftercare

- 2.8.1 The operator shall maintain a closure and aftercare management plan.

2.9 Landfill gas management

- 2.9.1 The operator shall take appropriate measures, including, but not limited to, those specified in any approved landfill gas management plan, to:
- (a) collect landfill gas; and
 - (b) control the migration of landfill gas.
- 2.9.2 The operator shall use the collected landfill gas to produce energy. If the collected landfill gas cannot be used to produce energy, the operator shall use appropriate measures to flare or treat the gas in accordance with an approved landfill gas management plan.
- 2.9.3 The operator shall:
- (a) if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a revised landfill gas management plan;
 - (b) implement the revised landfill gas management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3 Emissions and monitoring

3.1 Emissions to water, air or land

- 3.1.1 The limits in schedule 3 shall not be exceeded.
- 3.1.2 The operator shall prevent the input of any hazardous substances from the activities into groundwater.

- 3.1.3 The operator shall submit to the Environment Agency a review of the Hydrogeological Risk Assessment:
- (a) between nine and six months prior to the fourth anniversary of the granting of the permit, and
 - (b) between nine and six months prior to every subsequent six years after the fourth anniversary of the granting of the permit.

3.2 Emissions of substances not controlled by emission limits

- 3.2.1 Emissions of substances not controlled by emission limits (excluding odour) shall not cause pollution. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved emissions management plan, have been taken to prevent or where that is not practicable, to minimise, those emissions.
- 3.2.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution, submit to the Environment Agency for approval within the period specified, an emissions management plan which identifies and minimises the risks of pollution from emissions of substances not controlled by emission limits;
 - (b) implement the approved emissions management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.
- 3.2.3 All liquids in containers, whose emission to water or land could cause pollution, shall be provided with secondary containment, unless the operator has used other appropriate measures to prevent or where that is not practicable, to minimise, leakage and spillage from the primary container.

3.3 Odour

- 3.3.1 Emissions from the activities shall be free from odour at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved odour management plan, to prevent or where that is not practicable to minimise the odour.
- 3.3.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to odour, submit to the Environment Agency for approval within the period specified, an odour management plan which identifies and minimises the risks of pollution from odour;
 - (b) implement the approved odour management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.4 Noise and vibration

- 3.4.1 Emissions from the activities shall be free from noise and vibration at levels likely to cause pollution outside the site, as perceived by an authorised officer of the Environment Agency, unless the operator has used appropriate measures, including, but not limited to, those specified in any approved noise and vibration management plan to prevent or where that is not practicable to minimise the noise and vibration.
- 3.4.2 The operator shall:
- (a) if notified by the Environment Agency that the activities are giving rise to pollution outside the site due to noise and vibration, submit to the Environment Agency for approval within the

period specified, a noise and vibration management plan which identifies and minimises the risks of pollution from odour;

- (b) implement the approved noise and vibration management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

3.5 Monitoring

3.5.1 The operator shall, unless otherwise agreed in writing by the Environment Agency, undertake the monitoring and any other actions specified in the following tables in schedule 3 to this permit:

- (a) Leachate specified in tables S3.1 and S3.6;
- (b) Groundwater specified in tables S3.4;
- (c) Landfill gas specified in tables S3.2, S3.5 and S3.7; and
- (d) Particulate matter specified in table S3.3.

3.5.2 The operator shall maintain records of all monitoring required by this permit including records of the taking and analysis of samples, instrument measurements (periodic and continual), calibrations, examinations, tests and surveys and any assessment or evaluation made on the basis of such data.

3.5.3 A topographical survey of the site referenced to ordnance datum shall be carried out:

- (a) annually, and
- (b) prior to the disposal of waste in any new cell or new development area of the landfill, and
- (c) following closure of the landfill or part of the landfill.

The topographical survey shall be used to produce a plan of a scale adequate to show the surveyed features of the site.

3.6 Pests

3.6.1 The activities shall not give rise to the presence of pests which are likely to cause pollution, hazard or annoyance outside the boundary of the site. The operator shall not be taken to have breached this condition if appropriate measures, including, but not limited to, those specified in any approved pests management plan, have been taken to prevent or where that is not practicable, to minimise the presence of pests on the site.

3.6.2 The operator shall:

- (a) if notified by the Environment Agency, submit to the Environment Agency for approval within the period specified, a pests management plan which identifies and minimises risks of pollution hazard or annoyance from pests;
- (b) implement the pests management plan, from the date of approval, unless otherwise agreed in writing by the Environment Agency.

4 Information

4.1 Records

4.1.1 All records required to be made by this permit shall:

- (a) be legible;

- (b) be made as soon as reasonably practicable;
- (c) if amended, be amended in such a way that the original and any subsequent amendments remain legible, or are capable of retrieval; and
- (d) be retained, unless otherwise agreed in writing by the Environment Agency, for at least 6 years from the date when the records were made, or in the case of the following records until permit surrender:
 - i. the results of groundwater monitoring;
 - ii. sub-surface landfill gas monitoring;
 - iii. leachate levels, quality and quantities;
 - iv. landfill gas generation and collection;
 - v. waste types and quantities;
 - vi. the location of hazardous waste deposits; and
 - vii. the specification and as built drawings of the basal, sidewall and capping engineering systems.

4.1.2 The operator shall keep on site all records, plans and the management system required to be maintained by this permit, unless otherwise agreed in writing by the Environment Agency.

4.2 Reporting

4.2.1 The operator shall send reports and notifications required by the permit to the Environment Agency using the contact details supplied in writing by the Environment Agency.

4.2.2 A report or reports on the performance of the activities over the previous year ('the annual report') shall be submitted to the Environment Agency by 31st January each year or such other date as may be agreed in writing by the Agency, with the exception of 4.2.2(c) that must be provided by the end of February each year. The report(s) shall include as a minimum:

- (a) a review of the results of the monitoring and assessment carried out in accordance with this permit against the relevant assumptions, parameters and results in the risk assessments submitted in relation to this installation and any agreed amendments thereto. The review will include written descriptions of the improvements made to operational performance during the year, action plans developed and planned improvements for the coming year;
- (b) the energy consumed at the site, reported in the format set out in schedule 4 table S4.3
- (c) the annual production/ treatment set out in schedule 4, table S4.2;
- (d) the topographical surveys required by condition 3.5.3 other than those submitted as part of a CQA validation report;
- (e) the volumetric difference (reported in cubic metres) between the most recent topographical survey and the previous annual topographical survey i.e. the additional volume of the landfill void that is occupied by waste;
- (f) an assessment of the settlement behaviour of the landfill body based on the difference between the most recent topographical survey and previous annual topographical survey for the areas of the landfill which did not receive waste between the surveys;
- (g) a calculation of the remaining capacity (reported in cubic metres) derived from the pre-settlement contours and the most recent topographical survey;

- (h) a plan(s) ('the monitoring and extraction point plan - MEPP') showing the locations of leachate and landfill gas extraction and all monitoring points;
- (i) details of compliance with the waste acceptance ratios set out in schedule 1 table S1.4;
- (j) a review detailing any alternative disposal or treatment options considered for the waste streams specified in schedule 2 table S2.2.

4.2.3 Within 28 days of the end of the reporting period the operator shall, unless otherwise agreed in writing by the Environment Agency, submit reports of the monitoring and assessment carried out in accordance with the conditions of this permit, as follows:

- (a) in respect of the parameters and emission points specified in schedule 4, table S4.1;
- (b) using the forms specified in schedule 4, table S4.4 or other reporting format as agreed in writing with the Environment Agency; and
- (c) giving the information from such results and assessments as may be required by the forms specified in those tables.

4.2.4 Within one month of the end of each quarter, the operator shall submit to the Environment Agency using the form made available for the purpose, the information specified on the form relating to the site and the waste accepted and removed from it during the previous quarter

4.2.5 The operator shall, unless notice under this condition has been served within the preceding four years, submit to the Environment Agency, within six months of receipt of a written notice, a report assessing whether there are other appropriate measures that could be taken to prevent, or where that is not practicable, to minimise pollution.

4.3 Notifications

- 4.3.1 (a) In the event that the operation of the activities gives rise to an incident or accident which significantly affects or may significantly affect the environment, the operator must immediately;
- (i) inform the Environment Agency,
 - (ii) take the measures necessary to limit the environmental consequences of such an incident or accident, and
 - (iii) take the measures necessary to prevent further possible incidents or accidents;
- (b) in the event of a breach of any permit condition the operator must immediately —
- (i) inform the Environment Agency, and
 - (ii) take the measures necessary to ensure that compliance is restored within the shortest possible time;
- (c) in the event of a breach of permit condition which poses an immediate danger to human health or threatens to cause an immediate significant adverse effect on the environment, the operator must immediately suspend the operation of the activities or the relevant part of it until compliance with the permit conditions has been restored.

4.3.2 Any information provided under condition 4.3.1 (a)(i), or 4.3.1 (b)(i) where the information relates to the breach of a limit specified in the permit, shall be confirmed by sending the information listed in schedule 5 to this permit within the time period specified in that schedule.

- 4.3.3 The Environment Agency shall be notified within 14 days of the occurrence of the following matters, except where such disclosure is prohibited by Stock Exchange rules:

Where the operator is a registered company:

- (a) any change in the operator's trading name, registered name or registered office address; and
- (b) any steps taken with a view to the operator going into administration, entering into a company voluntary arrangement or being wound up.

Where the operator is a corporate body other than a registered company:

- (a) any change in the operator's name or address; and
- (b) any steps taken with a view to the dissolution of the operator.

- 4.3.4 In any other case:

- (a) the death of any of the named operators (where the operator consists of more than one named individual);
- (b) any change in the operator's name(s) or address(es); and
- (c) any steps taken with a view to the operator, or any one of them, going into bankruptcy, entering into a composition or arrangement with creditors, or, in the case of them being in a partnership, dissolving the partnership.

- 4.3.5 Where the operator proposes to make a change in the nature or functioning, or an extension of the activities, which may have consequences for the environment and the change is not otherwise the subject of an application for approval under the Regulations or this permit:

- (a) the Environment Agency shall be notified at least 14 days before making the change; and
- (b) the notification shall contain a description of the proposed change in operation.

4.4 Interpretation

- 4.4.1 In this permit the expressions listed in schedule 6 shall have the meaning given in that schedule.
- 4.4.2 In this permit references to reports and notifications mean written reports and notifications, except where reference is made to notification being made "without delay", in which case it may be provided by telephone.

Schedule 1 - Operations

Table S1.1 activities

WFD Annex I and II operations (where applicable)	Activity listed in Schedule 1 of the EP Regulations	Description of specified activity	Limits of specified activity
D5 –Specially engineered landfill and R10 – Land treatment resulting in benefit to agriculture or ecology	Section 5.2 Part A (1) (a) , The disposal of waste in a landfill.	Landfill for hazardous waste and landfill restoration	Receipt, handling, storage and disposal of wastes, consisting of the types and quantities specified in conditions 2.6, as an integral part of landfilling.

Directly Associated Activities

N/A		Collection of leachate prior to removal off site by tanker	Leachate arising from the landfill
N/A		Collection of landfill gas prior to removal and treatment off site	Landfill gas arising from the landfill

Table S1.2 Operating techniques

Description	Parts	Date Received
Application	The response to questions 1.2, 2.1, 2.2, 2.3, 2.4 and 2.5 in part B of the Application Form. Excluding the responses to the following: 1.2. 2.1, 2.1.2, 2.2.1, 2.2.3, 2.2.4, 2.3.40, 2.3.45 - 2.3.47, 2.3.68, 4.1.3 - 4.1.23	09/06/2003
Application	Letter from Golder Associates (UK) Limited Dated 11 November 2003	13/11/2003
Application	Supplementary Stability Risk Assessment report. (Doc ID 3776505)	18/11/2003
Application	A revised surface water monitoring protocol. (Doc ID 3779750)	03/12/2003
Application	Stability Risk Assessment of the bund between the hazardous and non hazardous installations. (DOC ID 3787307)	21/01/2004
Compliance with improvement condition 1.4.1.1	Golder Associates (UK) Limited report 05529573.500 "Leachate Management Plan." (Doc ID 6350147)	31/03/2004
Report	AU/PC/NH/5232/01/ESID	01/11/2006
Report	AU/PC/PDH/2603/01/HRA	01/11/2006
Compliance with improvement condition	Landfill Gas Management Plan	July 2007

Table S1.2 Operating techniques

Description	Parts	Date Received
Particulates Monitoring Action Plan, dated 01/02/2010	All Parts	01/02/2010

Table S1.3 Improvement programme requirements

Reference	Requirement	Date
1	The operator shall submit to the Environment Agency for approval details of the waste types, quantities and acceptance criteria for wastes that are and will be accepted on site for the purpose of landfill restoration.	12/10/2015

Table S1.4 Annual waste input limits

Category	Limit Tonnes/ Year
Hazardous waste	500,000
Inert Waste for cover	100,000
Waste for restoration	As agreed in response to IC1 in table S1.3
Total	600,000

Schedule 2 - List of permitted wastes

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
01	WASTES RESULTING FROM EXPLORATION, MINING, QUARRYING, AND PHYSICAL AND CHEMICAL TREATMENT OF MINERALS
01 03	wastes from physical and chemical processing of metalliferous minerals
01 03 05*	other tailings containing dangerous substances
01 03 07*	other wastes containing dangerous substances from physical and chemical processing of metalliferous minerals
01 04	wastes from physical and chemical processing of non-metalliferous minerals
01 04 07*	wastes containing dangerous substances from physical and chemical processing of non-metalliferous minerals
01 05	drilling muds and other drilling wastes
01 05 05*	oil-containing drilling muds and wastes
01 05 06*	drilling muds and other drilling wastes containing dangerous substances
02	WASTES FROM AGRICULTURE, HORTICULTURE, AQUACULTURE, FORESTRY, HUNTING AND FISHING, FOOD PREPARATION AND PROCESSING
02 01	wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing
02 01 08*	agrochemical waste containing dangerous substances
04 02	wastes from the textile industry
04 02 14*	wastes from finishing containing organic solvents
04 02 16*	dyestuffs and pigments containing dangerous substances
05	WASTES FROM PETROLEUM REFINING, NATURAL GAS PURIFICATION AND PYROLYTIC TREATMENT OF COAL
05 01	wastes from petroleum refining
05 01 03*	tank bottom sludges
05 01 06*	oily sludges from maintenance operations of the plant or equipment
05 01 07*	acid tars
05 01 08*	other tars
05 01 11*	wastes from cleaning of fuels with bases
05 01 12*	oil containing acids
05 01 15*	spent filter clays

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
05 06	wastes from the pyrolytic treatment of coal
05 06 01*	acid tars
05 06 03*	other tars
05 07	wastes from natural gas purification and transportation
05 07 01*	wastes containing mercury
06	WASTES FROM INORGANIC CHEMICAL PROCESSES
06 03	wastes from the MFSU of salts and their solutions and metallic oxides
06 03 11*	solid salts and solutions containing cyanides
06 03 13*	solid salts and solutions containing heavy metals
06 03 15*	metallic oxides containing heavy metals
06 04	metal-containing wastes other than those mentioned in 06 03
06 04 03*	wastes containing arsenic
06 04 04*	wastes containing mercury
06 04 05*	wastes containing other heavy metals
06 05	sludges from on-site effluent treatment
06 05 02*	sludges from on-site effluent treatment containing dangerous substances
06 06	wastes from the MFSU of sulphur chemicals, sulphur chemical processes and desulphurisation processes
06 06 02*	wastes containing dangerous sulphides
06 07	wastes from the MFSU of halogens and halogen chemical processes
06 07 01*	wastes containing asbestos from electrolysis
06 08	wastes from the MFSU of silicon and silicon derivatives
06 08 02*	wastes containing dangerous silicones
06 09	wastes from the MFSU of phosphorous chemicals and phosphorous chemical processes
06 09 03*	calcium-based reaction wastes containing or contaminated with dangerous substances
06 10	wastes from the MFSU of nitrogen chemicals, nitrogen chemical processes and fertiliser manufacture
06 10 02*	wastes containing dangerous substances
06 13	wastes from inorganic chemical processes not otherwise specified
06 13 01*	inorganic plant protection products, wood-preserving agents and other biocides.
06 13 04*	wastes from asbestos processing

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
06 13 05*	Soot
07	WASTES FROM ORGANIC CHEMICAL PROCESSES
07 01	wastes from the manufacture, formulation, supply and use (MFSU) of basic organic chemicals
07 01 08*	other still bottoms and reaction residues
07 02	wastes from the MFSU of plastics, synthetic rubber and man-made fibres
07 02 10*	other filter cakes and spent absorbents
07 02 11*	sludges from on-site effluent treatment containing dangerous substances
07 02 14*	wastes from additives containing dangerous substances
07 02 16*	wastes containing dangerous silicones
07 03	wastes from the MFSU of organic dyes and pigments (except 06 11)
07 03 08*	other still bottoms and reaction residues
07 03 10*	other filter cakes and spent absorbents
07 04	wastes from the MFSU of organic plant protection products (except 02 01 08 and 02 01 09), wood preserving agents (except 03 02) and other biocides
07 04 07*	halogenated still bottoms and reaction residues
07 04 11*	sludges from on-site effluent treatment containing dangerous substances
07 05	wastes from the MFSU of pharmaceuticals
07 05 08*	other still bottoms and reaction residues
07 05 10*	other filter cakes and spent absorbents
07 05 13*	solid wastes containing dangerous substances
07 06	wastes from the MFSU of fats, grease, soaps, detergents, disinfectants and cosmetics
07 06 07*	halogenated still bottoms and reaction residues
07 06 08*	other still bottoms and reaction residues
07 06 10*	other filter cakes and spent absorbents
07 07	wastes from the MFSU of fine chemicals and chemical products not otherwise specified
07 07 08*	other still bottoms and reaction residues
07 07 09*	halogenated filter cakes and spent absorbents
07 07 10*	other filter cakes and spent absorbents

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
08	WASTES FROM THE MANUFACTURE, FORMULATION, SUPPLY AND USE (MFSU) OF COATINGS (PAINTS, VARNISHES AND VITREOUS ENAMELS), ADHESIVES, SEALANTS AND PRINTING INKS
08 01	wastes from MFSU and removal of paint and varnish
08 01 13*	sludges from paint or varnish containing organic solvents or other dangerous substances
08 01 17*	wastes from paint or varnish removal containing organic solvents or other dangerous substances
08 03	wastes from MFSU of printing inks
08 03 12*	waste ink containing dangerous substances
08 03 17*	waste printing toner containing dangerous substances
08 04	wastes from MFSU of adhesives and sealants (including waterproofing products)
08 04 09*	waste adhesives and sealants containing organic solvents or other dangerous substances
08 04 11*	adhesive and sealant sludges containing organic solvents or other dangerous substances
08 05	wastes not otherwise specified in 08
08 05 01*	waste isocyanates
09	WASTES FROM THE PHOTOGRAPHIC INDUSTRY
09 01	wastes from the photographic industry
09 01 06*	wastes containing silver from on-site treatment of photographic wastes
09 01 11*	single-use cameras containing batteries included in 16 06 01, 16 06 02 or 16 06 03
10	WASTES FROM THERMAL PROCESSES
10 01	wastes from power stations and other combustion plants (except 19)
10 01 04*	oil fly ash and boiler dust
10 01 13*	fly ash from emulsified hydrocarbons used as fuel
10 01 14*	bottom ash, slag and boiler dust from co-incineration containing dangerous substances
10 01 16*	fly ash from co-incineration containing dangerous substances
10 01 18*	wastes from gas cleaning containing dangerous substances
10 01 20*	sludges from on-site effluent treatment containing dangerous substances
10 02	wastes from the iron and steel industry
10 02 07*	solid wastes from gas treatment containing dangerous substances
10 02 11*	wastes from cooling-water treatment containing oil

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
10 03	wastes from aluminium thermal metallurgy
10 03 04*	primary production slags
10 03 08*	salt slags from secondary production
10 03 09*	black drosses from secondary production
10 03 17*	tar-containing wastes from anode manufacture
10 03 19*	flue-gas dust containing dangerous substances
10 03 21*	other particulates and dust (including ball-mill dust) containing dangerous substances
10 03 23*	solid wastes from gas treatment containing dangerous substances
10 03 25*	sludges and filter cakes from gas treatment containing dangerous substances
10 03 29*	wastes from treatment of salt slags and black drosses containing dangerous substances
10 04	wastes from lead thermal metallurgy
10 04 01*	slags from primary and secondary production
10 04 02*	dross and skimmings from primary and secondary production
10 04 03*	calcium arsenate
10 04 04*	flue-gas dust
10 04 05*	other particulates and dust
10 04 06*	solid wastes from gas treatment
10 04 07*	sludges and filter cakes from gas treatment
10 05	wastes from zinc thermal metallurgy
10 05 03*	flue-gas dust
10 05 05*	solid waste from gas treatment
10 05 06*	sludges and filter cakes from gas treatment
10 06	wastes from copper thermal metallurgy
10 06 03*	flue-gas dust
10 06 06*	solid wastes from gas treatment
10 06 09*	wastes from cooling-water treatment containing oil
10 07	wastes from silver, gold and platinum thermal metallurgy
10 07 07*	wastes from cooling-water treatment containing oil

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
10 08	wastes from other non-ferrous thermal metallurgy
10 08 08*	salt slag from primary and secondary production
10 08 12*	tar-containing wastes from anode manufacture
10 08 15*	flue-gas dust containing dangerous substances
10 08 17*	sludges and filter cakes from flue-gas treatment containing dangerous substances
10 08 19*	wastes from cooling-water treatment containing oil
10 09	wastes from casting of ferrous pieces
10 09 05*	casting cores and moulds which have not undergone pouring containing dangerous substances
10 09 07*	casting cores and moulds which have undergone pouring containing dangerous substances
10 09 09*	flue-gas dust containing dangerous substances
10 09 11*	other particulates containing dangerous substances
10 09 13*	waste binders containing dangerous substances
10 09 15*	waste crack-indicating agent containing dangerous substances
10 10	wastes from casting of non-ferrous pieces
10 10 05*	casting cores and moulds which have not undergone pouring, containing dangerous substances
10 10 07*	casting cores and moulds which have undergone pouring, containing dangerous substances
10 10 09*	flue-gas dust containing dangerous substances
10 10 11*	other particulates containing dangerous substances
10 10 13*	waste binders containing dangerous substances
10 10 15*	waste crack-indicating agent containing dangerous substances
10 11	wastes from manufacture of glass and glass products
10 11 09*	waste preparation mixture before thermal processing, containing dangerous substances
10 11 11*	waste glass in small particles and glass powder containing heavy metals (for example from cathode ray tubes)
10 11 13*	glass-polishing and -grinding sludge containing dangerous substances
10 11 15*	solid wastes from flue-gas treatment containing dangerous substances
10 11 17*	sludges and filter cakes from flue-gas treatment containing dangerous substances
10 11 19*	solid wastes from on-site effluent treatment containing dangerous substances
10 12	wastes from manufacture of ceramic goods, bricks, tiles and construction products
10 12 09*	solid wastes from gas treatment containing dangerous substances

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
10 12 11*	wastes from glazing containing heavy metals
10 13	wastes from manufacture of cement, lime and plaster and articles and products made from them
10 13 09*	wastes from asbestos-cement manufacture containing asbestos
10 13 12*	solid wastes from gas treatment containing dangerous substances
10 14	waste from crematoria
10 14 01*	waste from gas cleaning containing mercury
11	WASTES FROM CHEMICAL SURFACE TREATMENT AND COATING OF METALS AND OTHER MATERIALS; NON-FERROUS HYDRO-METALLURGY
11 01	wastes from chemical surface treatment and coating of metals and other materials (for example galvanic processes, zinc coating processes, pickling processes, etching, phosphatising, alkaline degreasing, anodising)
11 01 08*	phosphatising sludges
11 01 09*	sludges and filter cakes containing dangerous substances
11 01 13*	degreasing wastes containing dangerous substances
11 01 15*	eluate and sludges from membrane systems or ion exchange systems containing dangerous substances
11 01 16*	saturated or spent ion exchange resins
11 01 98*	other wastes containing dangerous substances
11 02	wastes from non-ferrous hydrometallurgical processes
11 02 02*	sludges from zinc hydrometallurgy (including jarosite, goethite)
11 02 05*	wastes from copper hydrometallurgical processes containing dangerous substances
11 02 07*	other wastes containing dangerous substances
11 03	sludges and solids from tempering processes
11 03 01*	wastes containing cyanide
11 03 02*	other wastes
11 05	wastes from hot galvanising processes
11 05 03*	solid wastes from gas treatment
11 05 04*	spent flux
12	WASTES FROM SHAPING AND PHYSICAL AND MECHANICAL SURFACE TREATMENT OF METALS AND PLASTICS
12 01	wastes from shaping and physical and mechanical surface treatment of metals and plastics
12 01 12*	spent waxes and fats
12 01 14*	machining sludges containing dangerous substances

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
12 01 16*	waste blasting material containing dangerous substances
12 01 18*	metal sludge (grinding, honing and lapping sludge) containing oil
12 01 20*	spent grinding bodies and grinding materials containing dangerous substances
13	OIL WASTES AND WASTES OF LIQUID FUELS (except edible oils, and those in chapters 05, 12 and 19)
13 08	oil wastes not otherwise specified
13 08 01*	desalter sludges or emulsions
14	WASTE ORGANIC SOLVENTS, REFRIGERANTS AND PROPELLANTS (except 07 and 08)
14 06	waste organic solvents, refrigerants and foam/aerosol propellants
14 06 04*	sludges or solid wastes containing halogenated solvents
14 06 05*	sludges or solid wastes containing other solvents
15	WASTE PACKAGING; ABSORBENTS, WIPING CLOTHS, FILTER MATERIALS AND PROTECTIVE CLOTHING NOT OTHERWISE SPECIFIED
15 01	packaging (including separately collected municipal packaging waste)
15 01 10*	packaging containing residues of or contaminated by dangerous substances
15 01 11*	metallic packaging containing a dangerous solid porous matrix (for example asbestos), including empty pressure containers
15 02	absorbents, filter materials, wiping cloths and protective clothing
15 02 02*	absorbents, filter materials (including oil filters not otherwise specified), wiping cloths, protective clothing contaminated by dangerous substances
16	WASTES NOT OTHERWISE SPECIFIED IN THE LIST
16 01	end-of-life vehicles from different means of transport (including off-road machinery) and wastes from dismantling of end-of-life vehicles and vehicle maintenance (except 13, 14, 16 06 and 16 08)
16 01 08*	components containing mercury
16 01 11*	brake pads containing asbestos
16 01 21*	hazardous components other than those mentioned in 16 01 07 to 16 01 11 and 16 01 13 and 16 01 14
16 02	wastes from electrical and electronic equipment
16 02 12*	discarded equipment containing free asbestos
16 02 13*	discarded equipment containing hazardous components ¹ other than those mentioned in 16 02 09 to 16 02 12
16 02 15*	hazardous components removed from discarded equipment

¹ Hazardous components from electrical and electronic equipment may include accumulators and batteries mentioned in 16 06 and marked as hazardous; mercury switches, glass from cathode ray tubes and other activated glass, etc.

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
16 03	off-specification batches and unused products
16 03 03*	inorganic wastes containing dangerous substances
16 05	gases in pressure containers and discarded chemicals
16 05 06*	laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory chemicals
16 05 07*	discarded inorganic chemicals consisting of or containing dangerous substances
16 07	wastes from transport tank, storage tank and barrel cleaning (except 05 and 13)
16 07 08*	wastes containing oil
16 07 09*	wastes containing other dangerous substances
16 08	spent catalysts
16 08 02*	spent catalysts containing dangerous transition metals ² or dangerous transition metal compounds
16 08 05*	spent catalysts containing phosphoric acid
16 08 07*	spent catalysts contaminated with dangerous substances
16 11	waste linings and refractories
16 11 01*	carbon-based linings and refractories from metallurgical processes containing dangerous substances
16 11 03*	other linings and refractories from metallurgical processes containing dangerous substances
16 11 05*	linings and refractories from non-metallurgical processes containing dangerous substances
17	CONSTRUCTION AND DEMOLITION WASTES (INCLUDING EXCAVATED SOIL FROM CONTAMINATED SITES)
17 01	concrete, bricks, tiles and ceramics
17 01 06*	mixtures of, or separate fractions of concrete, bricks, tiles and ceramics containing dangerous substances
17 02	wood, glass and plastic
17 02 04*	glass, plastic and wood containing or contaminated with dangerous substances
17 04 09*	metal waste contaminated with dangerous substances
17 05	soil (including excavated soil from contaminated sites), stones and dredging spoil
17 05 03*	soil and stones containing dangerous substances
17 05 05*	dredging spoil containing dangerous substances
17 05 07*	track ballast containing dangerous substances

² For the purpose of this entry, transition metals are: scandium, vanadium, manganese, cobalt, copper, yttrium, niobium, hafnium, tungsten, titanium, chromium, iron, nickel, zinc, zirconium, molybdenum and tantalum. These metals or their compounds are dangerous if they are classified as dangerous substances. The classification of dangerous substances shall determine which among those transition metals and which transition metal compounds are hazardous.

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
17 06	insulation materials and asbestos-containing construction materials
17 06 01*	insulation materials containing asbestos
17 06 03*	other insulation materials consisting of or containing dangerous substances
17 06 05*	construction materials containing asbestos ³
17 08	gypsum-based construction material
17 08 01*	gypsum-based construction materials contaminated with dangerous substances
17 09	other construction and demolition wastes
17 09 01*	construction and demolition wastes containing mercury
17 09 03*	other construction and demolition wastes (including mixed wastes) containing dangerous substances
18	WASTES FROM HUMAN OR ANIMAL HEALTH CARE AND/OR RELATED RESEARCH (except kitchen and restaurant wastes not arising from immediate health care)
18 01 10*	amalgam waste from dental care
19	WASTES FROM WASTE MANAGEMENT FACILITIES, OFF-SITE WASTE WATER TREATMENT PLANTS AND THE PREPARATION OF WATER INTENDED FOR HUMAN CONSUMPTION AND WATER FOR INDUSTRIAL USE
19 01	wastes from incineration or pyrolysis of waste
19 01 05*	filter cake from gas treatment
19 01 07*	solid wastes from gas treatment
19 01 10*	spent activated carbon from flue-gas treatment
19 01 11*	bottom ash and slag containing dangerous substances
19 01 13*	fly ash containing dangerous substances
19 01 15*	boiler dust containing dangerous substances
19 01 17*	pyrolysis wastes containing dangerous substances
19 02	wastes from physico/chemical treatments of waste (including dechromatation, decyanidation, neutralisation)
19 02 04*	premixed wastes composed of at least one hazardous waste
19 02 05*	sludges from physico/chemical treatment containing dangerous substances
19 02 09*	solid combustible wastes containing dangerous substances

³ As far as the landfilling of waste is concerned, Member States may decide to postpone the entry into force of this entry until the establishment of appropriate measures for the treatment and disposal of waste from construction material containing asbestos. These measures are to be established according to the procedure referred to in Article 17 of Council Directive 1999/31/EC on the landfill of waste (OJ L 182,16.7.1999,p.1) and shall be adopted by 16 July 2002 at the latest.'

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
19 02 11*	other wastes containing dangerous substances
19 03	stabilised/solidified wastes⁴
19 03 04*	wastes marked as hazardous, partly ⁵ stabilised
19 03 06*	wastes marked as hazardous, solidified
19 04	vitrified waste and wastes from vitrification
19 04 02*	fly ash and other flue-gas treatment wastes
19 04 03*	non-vitrified solid phase
19 08	wastes from waste water treatment plants not otherwise specified
19 08 06*	saturated or spent ion exchange resins
19 08 07*	solutions and sludges from regeneration of ion exchangers
19 08 08*	membrane system waste containing heavy metals
19 08 10*	grease and oil mixture from oil/water separation other than those mentioned in 19 08 09
19 08 11*	sludges containing dangerous substances from biological treatment of industrial waste water
19 08 13*	sludges containing dangerous substances from other treatment of industrial waste water
19 10	wastes from shredding of metal-containing wastes
19 10 03*	fluff-light fraction and dust containing dangerous substances
19 10 05*	other fractions containing dangerous substances
19 11	wastes from oil regeneration
19 11 01*	spent filter clays
19 11 02*	acid tars
19 11 04*	wastes from cleaning of fuel with bases
19 11 05*	sludges from on-site effluent treatment containing dangerous substances
19 11 07*	wastes from flue-gas cleaning

⁴ Stabilisation processes change the dangerousness of the constituents in the waste and thus transform hazardous waste into non-hazardous waste. Solidification processes only change the physical state of the waste (e.g. liquid into solid) by using additives without changing the chemical properties of the waste.

⁵ A waste is considered as partly stabilised if, after the stabilisation process, dangerous constituents which have not been changed completely into non-dangerous constituents could be released into the environment in the short, middle or long term.

Table S2.1 Permitted waste types for disposal at a landfill for hazardous waste

Waste code	Description
19 12	wastes from the mechanical treatment of waste (for example sorting, crushing, compacting, pelletising) not otherwise specified
19 12 11*	other wastes (including mixtures of materials) from mechanical treatment of waste containing dangerous substances
19 13	wastes from soil and groundwater remediation
19 13 01*	solid wastes from soil remediation containing dangerous substances
19 13 03*	sludges from soil remediation containing dangerous substances
19 13 05*	sludges from groundwater remediation containing dangerous substances
20	MUNICIPAL WASTES (HOUSEHOLD WASTE AND SIMILAR COMMERCIAL, INDUSTRIAL AND INSTITUTIONAL WASTES) INCLUDING SEPARATELY COLLECTED FRACTIONS
20 01	separately collected fractions (except 15 01)
20 01 27*	paint, inks, adhesives and resins containing dangerous substances
20 01 29*	detergents containing dangerous substances
20 01 35*	discarded electrical and electronic equipment other than those mentioned in 20 01 21 and 20 01 23 containing hazardous components (6)

Table S2.2 Specified Granular Wastes with elevated WAC limits

List of Waste classification	Description	Component
19 01 07*	solid waste from gas treatment	Chloride, Lead, TDS
19 01 11*	bottom ash and slag	Chloride, Lead, TDS
19 02 05*	sludges from physic-chemical treatment containing dangerous substances	Chloride, Lead, TDS
19 03 04*	waste marked hazardous, partly stabilised	Chloride, Lead, TDS

Table S2.3 WAC Limits for Specified Granular Wastes

Component	L/S =10/kg Leaching limit (mg/kg dry substance)
Chloride	<75,000
Lead	<150
Total Dissolved Solids (TDS) ¹	<300,000

¹ the value for TDS can be used alternatively to values for Chloride

Table S2.4 Permitted waste types accepted for restoration

Waste code	Description
As agreed in response to IC1 in table S1.3	

Table S2.5 Permitted waste types - inert waste for cover for hazardous waste landfills

Waste code	Description
10	WASTES FROM THERMAL PROCESSES
10 11	wastes from manufacture of glass and glass products
10 11 03	waste glass-based fibrous materials
15	WASTE PACKAGING; ABSORBENTS, WIPING CLOTHS, FILTER MATERIALS AND PROTECTIVE CLOTHING NOT OTHERWISE SPECIFIED
15 01	packaging (including separately collected municipal packaging waste)
15 01 07	glass packaging
17	CONSTRUCTION AND DEMOLITION WASTES (INCLUDING EXCAVATED SOIL FROM CONTAMINATED SITES)
17 01	concrete, bricks, tiles and ceramics
17 01 01	concrete
17 01 02	bricks
17 01 03	tiles and ceramics
17 01 07	mixtures of concrete, bricks, tiles and ceramics
17 02	wood, glass and plastic
17 02 02	glass
17 05	soil (including excavated soil from contaminated sites), stones and dredging spoil
17 05 04	soil and stones
19	WASTES FROM WASTE MANAGEMENT FACILITIES, OFF-SITE WASTE WATER TREATMENT PLANTS AND THE PREPARATION OF WATER INTENDED FOR HUMAN CONSUMPTION AND WATER FOR INDUSTRIAL USE
19 12	wastes from the mechanical treatment of waste (for example sorting, crushing, compacting, pelletising) not otherwise specified.
19 12 05	glass
20	MUNICIPAL WASTES (HOUSEHOLD WASTE AND SIMILAR COMERCIAL, INDUSTRIAL WASTES) INCLUDING SEPARATELY COLLECTED FRACTIONS
20 01	separately collected fractions (except 15 01)
20 01 02	glass
20 02 02	soil and stones

Schedule 3 – Emissions and monitoring

Table S3.1 Leachate level limits and monitoring requirements

Monitoring point reference/ Description	Limit	Monitoring frequency	Monitoring method
PCLW3a2, PCLW3a3, PCLW4a2, PCLW4a3, PCLW5a2, PCLW5a3, Phase 6 - 6A2 and 6A3	1m above the basal liner	Monthly	As specified in Environment Agency Guidance TGN02 (February 2003) or such other subsequent guidance as may be agreed in writing with the Environment Agency or as otherwise agreed with the Agency as part of a leachate monitoring plan
PCLW3a1, PCLW4a1, PCLW5a1 and Phase 6 - 6A1 (leachate collection sump)	2m above the basal liner		
	2m above the basal liner		

Table S3.2 Landfill gas in external monitoring boreholes – limits and monitoring requirements

Monitoring point Ref. /description	Parameter	Limit (including units)	Monitoring frequency	Monitoring standard or method
PC05a	Methane	1 %v/v	Weekly	As per LFTGN03 Guidance on the management of landfill gas, Environment Agency, September 2004 or such other subsequent guidance as may be agreed in writing with Environment Agency.
	Carbon Dioxide	6%v/v		
	Oxygen	no limit		
	Atmospheric pressure	no limit		
PC10b	Differential Pressure	no limit	Weekly	Record whether the ground is: <ul style="list-style-type: none"> • Waterlogged • Frozen • Snow covered
	Methane	1 %v/v		
	Carbon Dioxide	4%v/v		
	Oxygen	no limit		
	Atmospheric pressure	no limit		

Table S3.2 Landfill gas in external monitoring boreholes – limits and monitoring requirements

Monitoring point Ref. /description	Parameter	Limit (including units)	Monitoring frequency	Monitoring standard or method
	Differential Pressure	no limit		
PC11a	Methane	1 %v/v	Weekly	
	Carbon Dioxide	8.5%v/v		
	Oxygen	no limit		
	Atmospheric pressure	no limit		
	Differential Pressure	no limit		
PC18b	Methane	2 %v/v	Weekly	
	Carbon Dioxide	2.5%v/v		
	Oxygen	no limit		
	Atmospheric pressure	no limit		
	Differential Pressure	no limit		
PC21	Methane	no limit	Weekly	
	Carbon Dioxide	no limit		
	Oxygen	no limit		
	Atmospheric pressure	no limit		
	Differential Pressure	no limit		
PC22	Methane	no limit	Weekly	
	Carbon Dioxide	2.5%v/v		
	Oxygen	no limit		
	Atmospheric pressure	no limit		

Table S3.2 Landfill gas in external monitoring boreholes – limits and monitoring requirements

Monitoring point Ref. /description	Parameter	Limit (including units)	Monitoring frequency	Monitoring standard or method
	Differential Pressure	no limit		
PC01a, PC01b, PC02a, PC02b, PC03a, PC03b,	Methane	1 %v/v	Weekly	
PC04a, PC04b, PC05a,	Carbon Dioxide	2.5%v/v		
PC05b, PC06, PC07,	Oxygen	no limit		
PC08, PC09, PC10a, PC11b, PC12a, PC12b,	Atmospheric pressure	no limit		
PC14, PC15, PC16b, PC17, PC18a, PC19a, PC19b, PC20, PC23	Differential Pressure	no limit		

Table S3.3 Particulate matter in ambient air - monitoring requirements					
Monitoring Point Ref. /Description	Parameter	Limit	Reference Period	Monitoring Frequency	Monitoring Standard or Method
PCASB02, PCASB04, PCAASB05	Asbestos Fibres	Where total fibre concentration exceeds 0.01 fibres/ml in any sample, that sample must be submitted for electron microscopy to confirm the concentration of asbestos fibres present	2 hours <hr/> 2 hours <hr/> 2 hours	Twice per year or every 5000 tonnes asbestos deposited, whichever is greater. <hr/> During all downwind monitoring <hr/> Minimum twice per year.	While asbestos is being deposited. <ul style="list-style-type: none"> • Pumped sampling • 1m above ground level • Flow rate = 4 litres/ minute • Minimum sample volume = 480 litres • Filter pore size = 1.2µm Asbestos fibre limit of detection = 0.001 fibres/ml
PCPM01, PCPM04, PCPM05	Suspended Particulate PM10	Not to exceed 50 µg/m3 more than 35 times per annum <hr/> 40 µg/m3	Measured as 24 hour mean. <hr/> Measured as an annual mean	Annually, unless otherwise agreed in writing with the Agency	In accordance with the Particulates Monitoring Action Plan dated 01/02/2010
PCDD08, PCDD02, PCDD03, PCDD04, PCDD05, PCDD06, PCDD01 and PCDD07	Deposited dust	200 mg/m2	Weekly average	Weekly	In accordance with the Particulates Monitoring Action Plan dated 01/02/2010

Table S3.4 Groundwater – other monitoring requirements

Monitoring Point Ref. /Description	Parameter	Monitoring frequency	Monitoring standard or method
Up gradient MEPP	Water level, electrical conductivity, chloride, ammoniacal nitrogen, pH,	Quarterly	As specified in Environment Agency Guidance TGN02 'Monitoring of Landfill Leachate, Groundwater and Surface Water' (February 2003), Horizontal Guidance Note H1 – Environmental Risk Assessment for permits, Annex J, version 2, April 2010), or such other subsequent guidance as may be agreed in writing with the Environment Agency.
	total alkalinity, magnesium, potassium, total sulphates, calcium, sodium, chromium, copper, iron, lead, nickel, zinc, manganese	Annually	
	Hazardous substances plus barium, molybdenum, antimony, selenium, fluoride, DOC	Annually for first six years of operation	
Down or cross gradient MEPP	Water level, electrical conductivity, chloride, ammoniacal nitrogen, pH,	Quarterly	As specified in Environment Agency Guidance TGN02 'Monitoring of Landfill Leachate, Groundwater and Surface Water' (February 2003), Horizontal Guidance Note H1 – Environmental Risk Assessment for permits, Annex J, version 2, April 2010), or such other subsequent guidance as may be agreed in writing with the Environment Agency.
	total alkalinity, magnesium, potassium, total sulphates, calcium, sodium, chromium, copper, iron, lead, nickel, zinc, manganese	Annually	
	Hazardous substances detected in leachate plus barium, molybdenum, antimony, selenium, fluoride, DOC	Annually for first six years of operation then every two years	
MEPP	Base of monitoring point (mAoD)	Annually	After the initial 6 year monitoring period for hazardous substances, if the results of quarterly or annual monitoring suggest an increase in contamination, the operator shall also undertake a full leachate hazardous substances screen.

Table S3.5 Landfill gas – other monitoring requirements

Monitoring Point Ref. /Description	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
One in waste borehole per cell and leachate wells	Methane Carbon Dioxide Oxygen Carbon Monoxide Differential pressure Atmospheric pressure	Monthly	As per LFTGN03 (September 2004) or such other subsequent guidance as may be agreed in writing with the Environment Agency	As per LFTGN03 (September 2004) or such other subsequent guidance as may be agreed in writing with the Environment Agency
	Hydrogen sulphide Hydrogen	Quarterly	Calibrated handheld monitoring instrument or Tedlar Bag sample in accordance with LFTGN04 or other such subsequent guidance as may be agreed in writing with the Environment Agency or a method agreed with the Environment Agency	Concentrations of hydrogen sulphide shall be assessed in accordance with the gas and odour management plans
One in waste borehole per cell	Trace gas	Annually	Trace gas analysis in accordance with LFTGN04 or such other subsequent guidance as may be agreed in writing with the Environment Agency or such other subsequent guidance as may be agreed in writing with the Environment Agency	The concentrations of trace gas components shall be assessed against the assumptions made in the Landfill gas risk assessment and dispersion modelling

Table S3.6 Leachate – other monitoring requirements

Monitoring point reference or description	Parameter	Monitoring frequency	Monitoring standard or method	Other specifications
Operational Cells or Phases (Any cell or phases that do not have a final engineered cap agreed in accordance with condition 2.5)			At leachate compliance point as listed in table S3.1.	
MEPP	pH, EC, total alkalinity, ammoniacal nitrogen, Chloride, COD, BOD, cadmium, chromium, copper, lead, nickel, iron, arsenic, magnesium, potassium, total sulphates, calcium, sodium, zinc, manganese	Quarterly	As specified in Environment Agency Guidance TGN02 (February 2003) and Horizontal Guidance Note H1 – Environmental Risk Assessment for permits, Annex J, version 2, April 2010) with one sampling point per cell / phase or such other subsequent guidance as may be agreed in writing with the Environment Agency	None
MEPP	Hazardous substances , plus barium, molybdenum, antimony, selenium, fluoride, DOC	Annually		None
MEPP	Depth to base (mAoD)	Annually		None
Non Operational Cells or Phases (Any cell or phases that have a final engineered cap agreed in accordance with condition 2.5)				
MEPP	pH, EC, total alkalinity, ammoniacal nitrogen, Chloride, COD, BOD, cadmium, chromium, copper, lead, nickel, iron, arsenic, magnesium, potassium, total sulphates, calcium, sodium, zinc, manganese,	Annually		
MEPP	Hazardous substances plus barium, molybdenum, antimony, selenium, fluoride, DOC	Once every four years		None
MEPP	Depth to base (mAoD)	Annually		None

Table S3.7 Landfill gas emissions from capped surfaces – monitoring requirements

Monitoring point Ref. /description	Parameter	Monitoring frequency	Monitoring Standard or method
Permanently capped zone	Methane concentration	Every 12 months	As per LFTGN 07 (v2 2010) or such other subsequent guidance as may be agreed in writing with the Environment Agency
Temporarily capped zone	Methane concentration	Every 12 months	As per LFTGN 07 (v2 2010) or such other subsequent guidance as may be agreed in writing with the Environment Agency
Whole site	Total methane emission	As agreed with the Environment Agency	As per LFTGN 07 (v2 2010) or such other subsequent guidance as may be agreed in writing with the Environment Agency
Uncapped areas	Methane concentration	Every 12 months	As agreed with the Environment Agency based on the wording of revised LFTGN 07 or landfill sector guidance or such other subsequent guidance as may be agreed in writing with the Environment Agency

Schedule 4 - Reporting

Parameters, for which reports shall be made, in accordance with conditions of this permit, are listed below.

Table S4.1 Reporting requirements

Parameter	Reporting period *	Period ends
Leachate level As specified by schedule 3, table S3.1	Every 3 months	31 March, 30 June, 30 September, 31 December
Landfill gas in external monitoring boreholes As specified by schedule 3, table S3.2	Every 3 months	31 March, 30 June, 30 September, 31 December
Particulate matter in ambient air. As required by schedule 3, table S3.3	Every 6 months	30 June, 31 December
Other groundwater monitoring As specified by schedule 3, table S3.4	Every 3 months	31 March, 30 June, 30 September, 31 December
Other Landfill gas monitoring As specified by schedule 3, table S3.5	Every 3 months	31 March, 30 June, 30 September, 31 December
• Trace gas monitoring	Every 12 months	31 December
Other leachate monitoring As specified by schedule 3, table S3.6	Every 12 months	31 December
• Hazardous substances	Every 12 months	31 December
Emission of landfill gas from capped surfaces As specified by schedule 3, table S3.7	Every 12 months	31 December
Meteorological data Landfill Directive, annex III, section 2	Every 12 months	31 December

* - where the reporting period is 12 months, you may submit this information as part of the 'annual report' required by condition 4.2.2.

Table S4.2: Annual production/treatment

Leachate:	Cubic metres/year
Disposed of off site;	
Disposed of to any onsite effluent treatment plant;	
Recirculated into the waste mass.	
Accepted from offsite for treatment at any onsite effluent treatment plant.	

Table S4.3 Performance Parameters

Parameter	Frequency of assessment	Annual total	Unit
Energy used (including for leachate treatment)	Annually		MWh of electricity or natural gas

Table S4.4 Reporting Forms

Media/parameter	Reporting Format	Date of Form
Leachate	Form leachate 1 or other reporting format to be agreed in writing with the Environment Agency	13/10/14
Groundwater	Form Groundwater 1 or other reporting format to be agreed in writing with the Environment Agency	13/10/14
Landfill gas	Form LFG 1 or other reporting format to be agreed in writing with the Environment Agency	13/10/14
Particulate matter	Form Particulate 1 or other reporting format to be agreed in writing with the Environment Agency	13/10/14
Waste Return	Waste Return Form RATS2E	
Landfill topographical surveys and interpretation	Reporting format to be agreed in writing with the Environment Agency	

Schedule 5 - Notification

This page outlines the information that the operator must provide.

Units of measurement used in information supplied under Part A and B requirements shall be appropriate to the circumstances of the emission. Where appropriate, a comparison should be made of actual emissions and authorised emission limits.

If any information is considered commercially confidential, it should be separated from non-confidential information, supplied on a separate sheet and accompanied by an application for commercial confidentiality under the provisions of the EP Regulations.

Part A

Permit Number	
Name of operator	
Location of Facility	
Time and date of the detection	

(a) Notification requirements for any malfunction, breakdown or failure of equipment or techniques, accident, or emission of a substance not controlled by an emission limit which has caused, is causing or may cause significant pollution

To be notified within 24 hours of detection

Date and Time of the event	
Reference or description of the location of the event	
Description of where any release into the environment took place	
Substances(s) potentially released	
Best estimate of the quantity or rate of release of substances	
Measures taken, or intended to be taken, to stop any emission	
Description of the failure or accident.	

(b) Notification requirements for the breach of a limit

To be notified within 24 hours of detection unless otherwise specified below

Emission point reference/ source	
Parameter(s)	
Limit	
Measured value and uncertainty	
Date and time of monitoring	
Measures taken, or intended to be taken, to stop the emission	

Time periods for notification following detection of a breach of a limit	
Parameter	Notification period

(c) Notification requirements for the detection of any significant adverse environmental effect	
To be notified within 24 hours of detection	
Description of where the effect on the environment was detected	
Substances(s) detected	
Concentrations of substances detected	
Date of monitoring/sampling	

Part B to be supplied as soon as practicable

Any more accurate information on the matters for notification under Part A.	
Measures taken, or intended to be taken, to prevent a recurrence of the incident	
Measures taken, or intended to be taken, to rectify, limit or prevent any pollution of the environment which has been or may be caused by the emission	
The dates of any unauthorised emissions from the facility in the preceding 24 months.	

Name*	
Post	
Signature	
Date	

* authorised to sign on behalf of the operator

Schedule 6 - Interpretation

"accident" means an accident that may result in pollution.

"annually" means once every year.

"application" means the application for this permit, together with any additional information supplied by the operator as part of the application and any response to a notice served under Schedule 5 to the EP Regulations.

"authorised officer" means any person authorised by the Environment Agency under section 108(1) of The Environment Act 1995 to exercise, in accordance with the terms of any such authorisation, any power specified in section 108(4) of that Act.

"Background concentration" means such concentration of that substance as is present in:

- For emissions to surface water, the surface water quality up-gradient of the site; or
- For emissions to sewer, the surface water quality up-gradient of the sewage treatment works discharge; or
- For emissions of landfill gas, the ground or air outside the site and not attributable to the site.

"Cell layout drawing" means:

- (a) A drawing or drawings of the proposed new cell that illustrate(s) in sufficient detail:
- i. the location of the new cell on the site;
 - ii. the proposed level (Above Ordnance Datum) of the base of the excavation;
 - iii. the proposed finished levels of all containment and leachate drainage layers;
 - iv. the positions of leachate management infrastructure; and
 - v. the positions of landfill gas infrastructure (if appropriate).
- (b) A detailed written explanation of any minor design changes from the most recently approved cell that result from the new cell layout. This would include, for example:
- i. changes to slope length and gradient within the cell;
 - ii. new leachate or landfill gas infrastructure construction design;
 - iii. slope stability issues such as new basal excavation level; and/or
 - iv. depth of waste.

"Construction Proposals" means written information, at a level of detail appropriate to the complexity and pollution risk, on the design, specifications of materials selected, stability assessment (where relevant) and the construction quality assurance (CQA) programme in relation to the New Cell or Landfill Infrastructure.

"CQA Validation Report" means the final "as built" construction and engineering details of the New Cell or of the Landfill Infrastructure. It must provide a comprehensive record of the construction and must include, where relevant:

- The results of all testing required by the CQA programme - this must include the records of any failed tests with a written explanation, details of the remedial action taken, referenced to the

- appropriate secondary testing;
- Plans showing the location of all tests;
- "As-built" plans and sections of the works;
- Copies of the site engineer's daily records;
- Records of any problems or non-compliances and the solution applied;
- Any other site specific information considered relevant to proving the integrity of the New Cell or Landfill Infrastructure;
- Validation by a qualified person that all of the construction has been carried out in accordance with the Construction Proposals.

"*EP Regulations*" means The Environmental Permitting (England and Wales) Regulations 2010, SI 2010 No.675. Words and expressions used in this permit which are also used in those Regulations have the same meanings as in those Regulations.

"*emissions of substances not controlled by emission limits*" means emissions of substances to air, water or land from the activities, either from the emission points specified in schedule 3 or from other localised or diffuse sources, which are not controlled by an emission or background concentration limit.

"*exceeded*" means that a value is above a permitted limit, or where a range of values or a minimum value is set as a permitted limit it means a value outside that range or below the minimum value, whichever is applicable.

"*Hazardous substances*" as defined by the Environmental Permitting (England and Wales) Regulations 2010, SI 2010 No.675, schedule 22 and listed in our Hydrogeological risk assessment guidance, annex J to our H1 risk assessment guidance.

"*Landfill Infrastructure*" means any specified element of the:

- permanent capping;
- temporary capping (i.e. engineered temporary caps not cover materials);
- leachate abstraction systems;
- leachate transfer, treatment and storage systems;
- surface water drainage systems;
- leachate monitoring wells;
- groundwater monitoring boreholes;
- landfill gas monitoring boreholes;
- landfill gas management systems;
- lining within the installation.

within the site.

"*Liquids*" means any liquid other than leachate within the engineered landfill containment system.

"*LFTGN 05*" means Environment Agency Guidance for monitoring enclosed landfill gas flares.

"*LFTGN 07*" means Environment Agency Guidance on monitoring landfill gas surface emissions.

"*LFTGN 08*" means Environment Agency Guidance for monitoring landfill gas engines.

"*groundwater*" means all water, which is below the surface of the ground in the saturation zone and in direct contact with the ground or subsoil.

"*inert waste*" means waste that does not undergo any significant physical, chemical or biological transformations. Inert waste will not dissolve, burn or otherwise physically or chemically react, biodegrade or adversely affect other matter with which it comes into contact in a way likely to give rise to environmental pollution or harm human health. The total leachability and pollutant content of the waste and the ecotoxicity of the leachate must be insignificant, and in particular not endanger the quality of surface water and/or groundwater

"*Medicinal product*" means any medicine licensed by the Medicines and Healthcare products Regulatory Agency (MHRA) or their predecessors under the Medicines Act 1968, section 130.

"*M2*" means Environment Agency Guidance Monitoring of stack emissions to air.

"*New Cell*" means any new cell, part of a cell or other similar new area of the site where waste deposit is to commence after issue of this permit and can comprise:

- groundwater under-drainage system;
- permanent geophysical leak location system;
- leak detection layer;
- sub-grade;
- barriers;
- liners;
- leachate collection system;
- leachate abstraction system;
- separation bund/layer;
- cell or area surface water drainage system;
- side wall subgrade and containment systems;

for the New Cell.

"*MEPP*" Monitoring and extraction point plan, required by condition 4.2.2(h) to specify extraction points and routine monitoring locations.

"*No impact*" means that the change made to the construction process will not affect the agreed design criteria, specification or performance in a way that has a negative effect.

"*Pests*" means Birds, Vermin and Insects.

"*Previous year*" means the 12 month period preceding the month the annual report is submitted in

"*quarter*" means a calendar year quarter commencing on 1 January, 1 April, 1 July or 1 October.

"*Relevant waste acceptance procedures*" means the procedure for the acceptance of waste at landfills and the associated sampling and test methods specified in the Council Decision Annex (2003/33/EC, European Council of 19 December 2002).

"Relevant waste acceptance criteria" means the waste acceptance criteria and the associated sampling and test methods specified in the Council Decision Annex (2003/33/EC, European Council of 19 December 2002).


"Review of the Hydrogeological Risk Assessment" means a written review of the hydrogeological risk assessment included in the Application, together with any other parts of the Application that addressed the requirements of the EP Regulations. The review shall assess whether the activities of disposal or tipping for the purpose of disposal of waste authorised by the permit continue to meet the requirements of the EP Regulations.

"Waste code" means the six digit code referable to a type of waste in accordance with the List of Wastes (England) Regulations 2005, or List of Wastes (Wales) Regulations 2005, as appropriate, and in relation to hazardous waste, includes the asterisk.

Where a minimum limit is set for any emission parameter, for example pH, reference to exceeding the limit shall mean that the parameter shall not be less than that limit.

Unless otherwise stated, any references in this permit to concentrations of substances in emissions into air means the standards included in Environment Agency Guidance for Monitoring Enclosed Landfill Gas Flares LFTGN 05 or Guidance for Monitoring Landfill Gas Engine Emissions LFTGN 08.

Schedule 7 – Site Plan

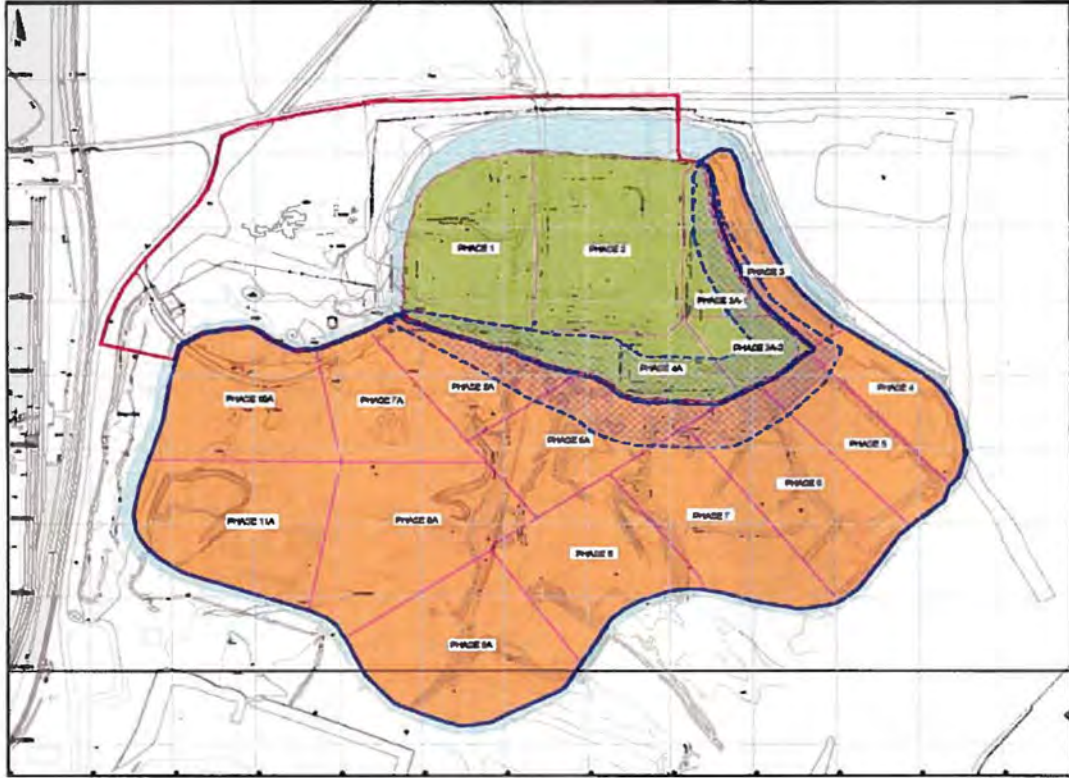

“©Crown Copyright. All rights reserved. Environment Agency, 100026380, 2014”

END OF PERMIT.

Permit Number: BV1339IT Operator: Augean North Limited

Facility: Port Clarence Hazardous Waste Landfill Form Number: Leachate 1 / 13/10/14

Reporting of leachate monitoring for the period from DD/MM/YYYY to DD/MM/YYYY

Monitoring Point	Substance / Parameter	Compliance limit	Reference Period	Result ^[1]	Test Method ^[2]	Sample Date and Times ^[3]	Uncertainty ^[4]

- [1] The result given is the maximum value (or the minimum value in the case of a limit that is expressed as a minimum) obtained during the reporting period, expressed in the same terms as the emission limit value. Where the emission limit value is expressed as a range, the result is given as the 'minimum – maximum' measured values.
- [2] Where an internationally recognised standard test method is used the reference number is given. Where another method that has been formally agreed with the Environment Agency is used, then the appropriate identifier is given. In other cases the principal technique is stated, for example gas chromatography.
- [3] For non-continuous measurements the date and time of the sample that produced the result is given. For continuous measurements the percentage of the process operating time covered by the result is given.
- [4] The uncertainty associated with the quoted result at the 95% confidence interval, unless otherwise stated.

Signed Date.....
(Authorised to sign as representative of Operator)

Permit Number: BV1339IT Operator: Augean North Limited

Facility:

Port Clarence Hazardous Waste Landfill

Form Number:

Groundwater1 / 13/10/14

Reporting of groundwater monitoring for the period from DD/MM/YYYY to DD/MM/YYYY

Monitoring Point	Substance / Parameter	Trigger level	Reference Period	Result ^[1]	Test Method ^[2]	Sample Date and Times ^[3]	Uncertainty ^[4]

- [1] The result given is the maximum value (or the minimum value in the case of a limit that is expressed as a minimum) obtained during the reporting period, expressed in the same terms as the emission limit value. Where the emission limit value is expressed as a range, the result is given as the 'minimum – maximum' measured values.
- [2] Where an internationally recognised standard test method is used the reference number is given. Where another method that has been formally agreed with the Environment Agency is used, then the appropriate identifier is given. In other cases the principal technique is stated, for example gas chromatography.
- [3] For non-continuous measurements the date and time of the sample that produced the result is given. For continuous measurements the percentage of the process operating time covered by the result is given.
- [4] The uncertainty associated with the quoted result at the 95% confidence interval, unless otherwise stated.

Signed
(Authorised to sign as representative of Operator)

Date.....

Permit Number: BV1339IT

Operator: Augean North Limited

Facility: Port Clarence Hazardous Waste Landfill

Form Number: LFG1 / 13/10/14

Reporting of landfill gas monitoring for the period from DD/MM/YYYY to DD/MM/YYYY

Monitoring Point	Substance / Parameter	Compliance limit	Reference Period	Result ^[1]	Test Method ^[2]	Sample Date and Times ^[3]	Uncertainty ^[4]

- [1] The result given is the maximum value (or the minimum value in the case of a limit that is expressed as a minimum) obtained during the reporting period, expressed in the same terms as the emission limit value. Where the emission limit value is expressed as a range, the result is given as the 'minimum – maximum' measured values.
- [2] Where an internationally recognised standard test method is used the reference number is given. Where another method that has been formally agreed with the Environment Agency is used, then the appropriate identifier is given. In other cases the principal technique is stated, for example gas chromatography.
- [3] For non-continuous measurements the date and time of the sample that produced the result is given. For continuous measurements the percentage of the process operating time covered by the result is given.
- [4] The uncertainty associated with the quoted result at the 95% confidence interval, unless otherwise stated.

Signed
(Authorised to sign as representative of Operator)

Date.....

Permit Number: BV1339IT

Operator: Augean North Limited

Facility: Port Clarence Hazardous Waste Landfill

Form Number: Particulate1 / 13/10/14

Reporting of particulates for the period from DD/MM/YYYY to DD/MM/YYYY

Emission Point	Substance / Parameter	Emission Limit Value	Reference Period	Result ^[1]	Test Method ^[2]	Sample Date and Times ^[3]	Uncertainty ^[4]

- [1] The result given is the maximum value (or the minimum value in the case of a limit that is expressed as a minimum) obtained during the reporting period, expressed in the same terms as the emission limit value. Where the emission limit value is expressed as a range, the result is given as the 'minimum – maximum' measured values.
- [2] Where an internationally recognised standard test method is used the reference number is given. Where another method that has been formally agreed with the Environment Agency is used, then the appropriate identifier is given. In other cases the principal technique is stated, for example gas chromatography.
- [3] For non-continuous measurements the date and time of the sample that produced the result is given. For continuous measurements the percentage of the process operating time covered by the result is given.
- [4] The uncertainty associated with the quoted result at the 95% confidence interval, unless otherwise stated.

Signed

Date.....

(Authorised to sign as representative of Operator)