




ASI GENERATORS

ASI 100 P 3 Generator Set

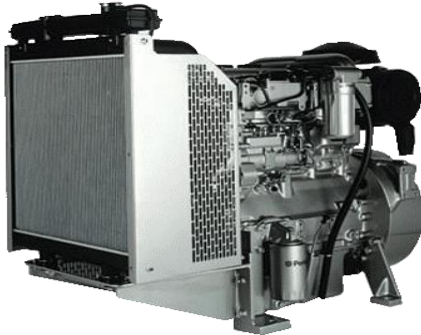

Engine Specification Perkins 1100 Series 1104D - E44TAG2

Number of cylinders	4 vertical in - line	
Bore and stroke	105 x 127 mm	4.1 x 5.0 in
Displacement	4.41 litres	269 in
Aspiration	Turbocharged	
Cycle	4 stroke	
Combustion system	Direct injection	
Compression ratio	18.2:1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	8.4 litres	2.2 US gal
Cooling system	Water-cooled	
Total coolant capacity	16.5 litres	4.4 US gal

GENERATOR MarelliMotori

MODEL: MXBE225MB4	100 KW / 125 kva
PF: .08	CONNECTION: SERIES
EXC.V: 40	PHASE: 3
EXC.A: 2.6	INS.CLASS: H
WDG: 706	IP: IP23
ALT.m: 1000	KG: 190

Generator Control / Breaker

Deepsea Control / Similar
Voltage Protection
Amperage Read
Oil Shutdown
Temperature Shutdown
Remote Start
LCD Screen
Breaker
300AMP Breaker in Nema
1 Box

Fuel Tank

200 gallon double wall fuel tank
Heavy duty steel construction
Anti-Rust protection coating
UL 142
Optional Double Wall Fuel Tank UL 142

ASI GENERATOR

10890 Quail Roost Dr, Unit 49 Cutler Bay, FL 33157 Phone: 305 - 319 - 0875 Email: services@asigenerator.com