



KILEWS INDUSTRIAL CO., LTD. was established in July 1984. The company began with USD\$1,000.000 investment and six staff. We created the KILEWS as our trademark with the most professional techniques for making automatic electric screwdrivers to the world.

In 1988, our investment grew to USD\$170,000 and we decided to expand international markets, especially for Asia region.

In 1990, based on increasing demand for KOREA market, KILEWS set up the electric screwdriver assembling plant in INCHON, KOREA.

In 1992, with the approval of Investment Commission, MOEA, the company invested US\$200,000 to TIANJIN TAIWEI INTERNATIONAL TRADING CO., LTD. for international trading and Northern China Customer Service Center of KILEWS.

In July 1994, KILEWS (CHINA) CUSTOMER SERVICE CENTER was established in SHEN-ZHEN, KUAN-CHOU of China and KILEWS (H.K.) TRADING COMPANY in December in Hong Kong.

In January 1995, KILEWS completed building a new plant in Hsin-Chuang Dist., New Taipei City, Taiwan, R.O.C., the capital was increased to USD\$350,000 at the same time with 46 staff through professional automatic equipment to sell our products all over the world.

In 1996, KILEWS established two China offices- TUNG-GUAN OFFICE in April and Central China Customer & Service Center, Shanghai in October.

In February 1997, KILEWS MARKETING (S.E.A)(SINGAPORE) was established to sell and provide service in South –Eastern Asia.

In January 1998, AC230V electric screwdriver has been approved the certification of CE from ITS. UK. which allowed KILEWS formally entering into the EUROPE markets. In June, acquired "the Chinese chang cheng Certification" to meet the demand of mainland China's widely market. In December, AC115V acquired UL approval to strengthen the competition and satisfy the American markets' demand.

KILEWS acquired three certifications in 1998 CE from ITS. UK. In January.

KILEWS acquired three certifications in 1998 CE from ITS, UK. In January , Chinese Chang Cheng, China in June and UL of USA in December.


**In April 1999,** in order to satisfy increasing demand of EUROPE and UNITED STATES markets, the total capital has added to USD \$1,000,000 and increased the offshore staff at about 200 excluding 85 in Taiwan.

**In August 2000,** in order to further expand the CHINA market, KILEWS increased the capital to USD\$3,000,000 and established KILEWS Electric Tools (Shanghai) Co., Ltd. which manufacture electric screwdrivers for the needs of Chinese Market.


**In September 2000,** KILEWS acquired CE, CULUS certification on DC type 32V series electric screwdriver and Power Controller.













In December 2002, KILEWS Electric Tools (Shanghai) CO., LTD. was approved as ISO9001 manufacturer in China.

In January 2003, KILEWS products passed and acquired the CCC certificates by China CQC.

In January 2005, KILEWS Electric Tools (VIETNAM) CO., Ltd. was set up in Vietnam.

**In October 2007,** KILEWS new factory was set up in Taiwan and soon become one of biggest suppliers of electric screwdriver in the world.

In October 2008, the company held a grand opening of new plant in Taiwan for preparation of being a leading supplier of electric screwdrivers all over the world.

**In January 2009,** KILEWS self-researched, developed and produced brushless motor, entering the new generation of the small-size brushless motor. In March of the same year, KILEWS developed co-product for the brushless screwdriver application such as counter, low recoil force screwdriver....etc.

**In 2010,** Brushless technology was officially produced and promoted in Shanghai China and soon became the highest sale in the power tool market.

In 2011, KILEWS self-researched and developed automatic industrial brushless power torque screwdriver series. Focus on the convenience for the users and increase power saving, also design for energy conservation and environmental protection as well.

In 2012, Accomplished the development of cordless screwdriver series' product line, self-researched and developed automatic/semi-automatic / impact series industrial brushless cordless screwdriver and light weight, high speed automatic cordless brushless screwdriver.

In October 2012, KILEWS SKD-BE Series won the National Brand of Yushan Award, the award for outstanding business class award for the best product.

In October 2015, KILEWS established KILEWS WEST INC.

**In October 2016,** Develop and manufacture industrial 4.0 products, and become international leading brand.

**In October 2017,** Smart Torque Display Tool System won 2017 Taiwan Excellence Award in October.

In October 2018, Industrial Smart Counting Controller System, Smart Torque Display Electric Screwdriver series, DC built-in counter brushless electric screwdriver series and DC Micro Torque Brushless Screwdriver series won 2018 Taiwan Excellence Award.





## KILEWS\* SMART MULTI STAGE REMOTE CONTROL **BRUSHLESS INDUSTRIAL IMPACT WRENCH**

SKC-PTM Series





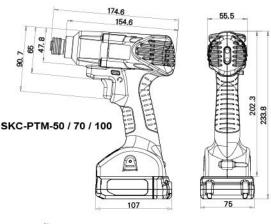

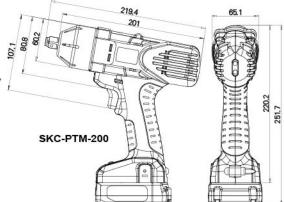

Unit: mm

#### Product Features

- OK & NG indicator Prevent cross head and stripped screw to secure fastening quality
- Program Max. 5 programs to use in a sequence
- •Counter Counter reminds user for no. of remaining untighten screw
- Low battery alert To judge best timing to change battery
- Prohibit setting configuration When activated, user cannot change settings without remote control. This is to avoid any user to change tool settings intentionally
- •Low voltage compensation, stable power output to ensure torque output stability

#### **High precision**

Intelligent Programable impact wrench (SKC-PTM series) must be tested with KTM-IWT50 /KTM-IWT400 torque tester.

- •Set PTM-50 at 80% output using M12 bolt (socket size: 19mm), KTM-IWT400 tester measured PTM-50 torque accuracy is  $\pm 8 \sim 10\%$ .
- •Set PTM-70 at 80% output using M14 bolt (socket size: 22mm), KTM-IWT400 tester measured PTM-70 torque accuracy is  $\pm 8 \sim 10\%$ .
- •Set PTM-100 at 80% output using M16 bolt (socket size: 24mm), KTM-IWT400 tester measured PTM-100 torque accuracy is  $\pm 8 \sim 10\%$ .
- Set PTM-200 at 80% output using M20 bolt (socket size: 30mm), KTM-IWT400 tester measured PTM-200 torque accuracy is  $\pm 8 \sim 10\%$ .
- Socket weight, driver handling, bolt property class, bolt size may all affect torque output.



KL-RC1 INFRARED REMOTE CONTROL

Specifications					
Model	SKC-PTM-50	SKC-PTM-70	SKC-PTM-100	SKC-PTM-200	
Input Voltage	14.4V	14.4V	14.4V	14.4V	
Free Speed (r.p.m)	0~1900	0~2600	0~2000	0~1700	
B.P.M	0 ~ 2500	0 ~ 3400	0 ~ 2600	0 ~ 2100	
Torque(N.m)	8 ~ 50	20 ~ 70	20 ~ 100	25 ~ 200	
Bolt Size ( Class 12.9)	M6\M8\M10\M12	M8\M10\M12\M14	M10\M12\M14\M16	M12\M14\M16\M20	
Torque Tester	KTM-IWT50 × KTM-IWT400	KTM-IWT400	KTM-IWT400	KTM-IWT400	
	Torque(M6) 3 - 20 N.m	Torque(M8) 8 - 30 N.m	Torque(M10) 8 - 40 N.m	Torque(M12) 15 - 110 N.m	
Torque	Torque(M8) 3 - 20 N.m	Torque(M10) 8 - 40 N.m	Torque(M12) 20 - 70 N.m	Torque(M14) 22 - 120 N.m	
Torque	Torque(M10) 5 - 30 N.m	Torque(M12) 20 - 60 N.m	Torque(M14) 20 - 90 N.m	Torque(M16) 22 - 140 N.m	
	Torque(M12) 12 - 50 N.m	Torque(M14) 25 - 70 N.m	Torque(M16) 25 - 100 N.m	Torque(M20) 23 - 200 N.m	
Bit Size	B 9.5 W3/8" W3/8" Hex. 6.35 mm 6.35 3/8" sq	89.5 3/8" sq Hex. 6.35emm 6.35	W3/8* W1/2* B 9.5 3/8* sq 1/2* sq Hex. 6.36mm 6.35	W1/2" Q1/2" sq	
Weight(kg)	0.98 (Without Battery)	1 (Without Battery)	1.02 (Without Battery)	1.5 (Without Battery)	
Size(mm)		174X202(LXH Without Battery)		219X220(LXH Without Battery)	
Applicable Battery	SKC-LB1425	SKC-LB1425	SKC-LB1425	SKC-LB1425	
Applicable Charge Station	SKC-P70W	SKC-P70W	SKC-P70W	SKC-P70W	
Optional Accessories		KL	-RC1		

## KILEWS\* AUTOMATIC INDUSTRIAL CORDLESS WITH COUNTER


BRUSHLESS MEDIUM / LOW TORQUE BATTERY SCREWDRIVERS SERIES **SKC-PTA-BE Series** 



#### **Product Features**

- 1. SKC-PTA-BE series
- a. Built in error proof function
- •NG / OK / OKALL
- screw list
- screw count
- Battery capacity
- Connection status
- Driver lock
- b. Display screw tightening status by LED and LCD
- c. I/O signals to PLC by KL-WSCBSN
- d. Input signal to control driver by PLC

#### **External Dimension**

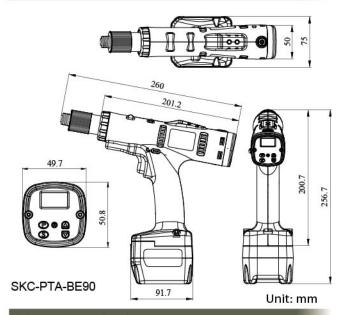

#### **Function Setting**

- A. Screw list
- B. Screw count
- C. OK ALL signal time
- D. Maximum fastening time
- E. Minimum fastening time
- F. Driver lock when error occurred
- G. Auto stop after batch complete
- H. Fastening speed and time


		A CONTRACTOR OF THE CONTRACTOR						
N	Model	SKC-PTA-BE120	SKC-PTA-BE90	SKC-PTA-BE50F				
Input	t Voltage		18V					
Torque	Hard Joint	6~12	3~9	2~5				
(N.m)	Soft Joint	6~9.6	3~7.2	2~4				
Repeatable Torque Accuracy			±3%					
Torque	Adjustment		External Stepless					
	e Speed	260~880	660~2200					
(r.p.	.m) ±10%		10 Steps					
We	eight (kg)		1.2 (Without Battery)					
Siz	ze (mm)		260X200 (LxH Without Battery)					
Applic	able Battery		SKC-LB1820B					
Applicable	Charge Station		SKC-P80WN-D					
Applicable	e Torque Meter	KTM-150						
Applica	able Bit Type	В Е	W 	3/8" sq				

#### BRUSHLESS MEDIUM / LOW TORQUE BATTERY SCREWDRIVERS SERIES

SKC-PTA-BT Series




#### **External Dimension**

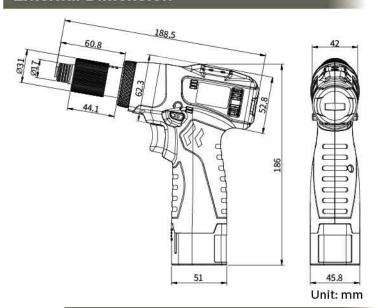

#### **Product Features**

- Compact light weight ergonomic design.
- •Cleaner quiter maintenance free brushless motor.
- Most ideal for areas where cables and hoses impede handling flexibility i.e. car interior electrical cabinet interiors. trains.
- •10.8V Lithium-ion battery.

## **Torque Range Reference Chart**

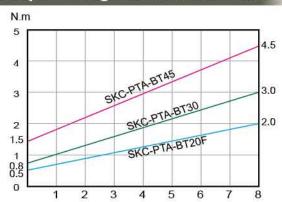


V	Model SKC-PTA-BT20F			SKC-PTA-BT30	SKC-PTA-BT45			
Input Voltage				10.8V				
Torque	Hard J	loint	0.5-2.0	0.8-3.0	1.5-4.5			
(N.m)	Soft J	oint	0.5~1.6	0.8-2.4	1.5-3.6			
epeatable <sup>*</sup>	Torque Ac	curacy		±3%				
Torque	Adjustm	ent		Stepless				
Free Sp	eed	Н	2700	1400	800			
(r.p.m) ±		LO	1900	1000	550			
Wei	ight (kg)			0.7 (Without Battery)				
Siz	ze (mm)			189X157 (LxH Without Battery)				
Applica	able Batte	ery		SKC-LB1025S				
Applicable Charge Station			SKC-P50WN-S					
Applica	ble Bit Ty	/pe	A ====================================	B 9.5 B 9.5 B 9.5 B 9.5 Hex. 6.35	<b>8</b> 5 6.35			

#### **BRUSHLESS MEDIUM / LOW TORQUE BATTERY SCREWDRIVERS SERIES**

SKC-PTA-B Series



#### **External Dimension**

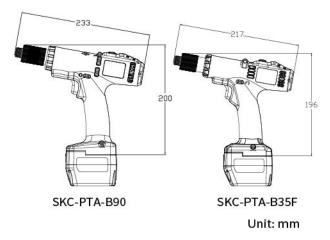

#### **Product Features**

- •High performance brushless motor with constant speed and 2 years warranty.
- External torque adjustment and low recoil design.
- •User-friendly design such as LED illumination and 10 degrees elevation design.









- •The cordless battery screwdriver has built-in indicating light to indicate the fastening procedure. The green LED will light up and give a short beep for every fastening screw. Conversely, the red LED will light up and give a long beep if the screw is fastened incorrectly or NG.
- Adopting Japanese high performance Li-ion (Li-Mn) battery which has longest standby time and lifetime.
- •Users can select HI/LO speed via the electric switch to meet the operation requirement.
- •In order to extend battery operating time, the cordless battery screwdriver will turn to sleep mode automatically when it idled over 3 seconds. Sleep mode helps to save electricity and extend battery life time.
- SKC-PTA-B120/B90 output stronger torque, therefor include with side pistol grip to maintain operating security.

Model		SKC-PTA-B120	SKC-PTA-B90	SKC-PTA-B50F	SKC-PTA-B60	SKC-PTA-B35	SKC-PTA-B35F				
Input	Voltage		18V								
Torque	Hard J	loint	6~12	3~9	2~5	2~6	1~3.5	1~3.5			
(N.m)	Soft J	oint	6~9.6	3~7.2	2~4	2~4.8	1~2.8	1~2.8			
Repeatable T	orque Acc	curacy			±3	%					
Torque Adjustment					External	Stepless					
Free Spe	Free Speed HI		880	1000	2200	1000	1000	2000			
(r.p.m) ±		LO	570	650	-	650	650				
Weig	ght (kg)		1.1 (Without Battery) 0.98 (Without Battery)								
Size	e (mm)		233x200 (LxH Without Battery) 217x196 (LxH Without Battery)								
Applica	ble Batte	ery			SKC-LE	31820B					
Applicable (	Charge S	Station		SKC-P80WN-D							
Applicable Torque Meter			KTM-150								
Applicable Bit Type		B 16 - 16 - 6.35	_ W HEX 6.35mm(No.3)	3/8"sq		B 6.35 HEX 6.35mm(No.3)	<del>-</del>				


BRUSHLESS HIGH TORQUE BATTERY SCREWDRIVERS SERIES SKC-PTA Series



#### **Product Features**

- •The high power brushless motor was researched, developed and produced by Kilews, with 2 years warranty.
- •The best choice of industrial assembly tool which can set the maximum torque up to 22 N.m, and the repeatable torque accuracy within ±3%.
- Adopting Japanese high performance Li-ion (Li-Mn) battery which has longest standby time and lifetime.
- The cordless battery screwdriver has beep alarm warning when the battery power capacity is low. The red LED will flicker when 20% left of battery power capacity and light up continuously when 10% left of battery power capacity. User can be reminded to replace the battery by the LED warning light.
- •The cordless battery screwdriver has built-in indicating light to indicate the fasten procedure during operation. The green LED will light up and give a short beep for every fastening screw. Conversely, the red LED will light up and give a long beep if the screw is fastened incorrectly or NG.
- •LED illumination, LED will light up while screwdriver is operating to help user to see the fastening object status and to make sure the screws are aimed to exact positions.
- •Users can select HI/LO speed via the electrical switch to meet the operation requirement.
- •In order to hold the cordless battery screwdriver comfortably, the shape is designed to be 10 degrees elevation and balanced as an excellent ergonomic design.
- •Torque identification rings are attached to distinguish the torque with different colors after the user adjusted the torque.
- •In order to extend battery operating time, the cordless battery screwdriver will turn to sleep mode automatically when it idled over 3 seconds. Sleep mode helps to save power and extend battery life time.
- •Due to the strong fastening torque, we have also included side pistol grip to maintain operating security.

#### External Dimension

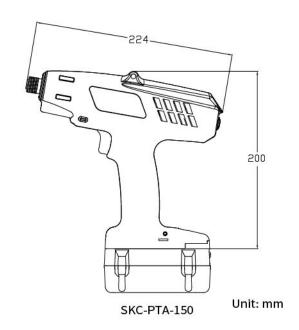

#### **Torque Identification Ring**



#### **Specifications**

N	lodel		SKC-PTA-220	SKC-PTA-150	
Input	t Voltage	е	18V		
Torque	Hard	Joint	8~22	6~15	
(N.m)	Soft .	Joint	8~17.6	6~12	
Repeatable Torque Accuracy			±3	%	
Torque .	Adjustn	nent	Internal	Stepless	
Free Sp	Free Speed		350	600	
(r.p.m) ±	:10%	LO	200	380	
Wei	ght (kg)		1.2 (Without Battery)		
Siz	e (mm)		224X200 (LXH Without Battery)		
Applica	ble Batt	tery	SKC-L	B1840	
Applicable	Charge	Station	SKC-P120W / SKC-P80WN / SKC-80WN		
Applicable Torque Meter			KTM-250		
Applicable Bit Type			B L. 16 L. 16 .35 HEX 6.35mm(No.3)	W	

\* \* Free load speed will be fixed when battery volume is more than 17V (17~21V)

# BRUSHLESS MEDIUM TORQUE BATTERY SCREWDRIVERS SERIES SKC-PTA Series




## **Function / Opearating Introduction**



#### **Function Name Table**

No.	Deseription	No.	Deseription
(1)	Trigger Switch	(7)	S Waist Hook
(2)	Forward/Reverse Lever	(8)	Indication Light
(3)	LED Light	(9)	Torque Wrench
(4)	Bit Sleeve	(10)	Speed Adjustment
(5)	Torque Identification Ring	(11)	Wrist Strap Hole
(6)	Driver Hook Hole	(12)	Slip Resistant Soft Cover

#### **External Dimension**

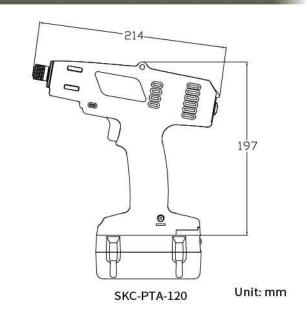

#### **Torque Identification Ring**



#### **Specifications**

Model Input Voltage			SKC-PTA-120	SKC-PTA-80	
			18V		
Torque	e Hard Joint		5~12	4~8	
(N.m)	Soft J	oint	5~9.6	4~6.4	
Repeatable	Torque A	ccuracy	±30	%	
Torque	Adjustm	ent	Internal Stepless		
Free Speed HI		н	720	1200	
(r.p.m)	±10%	LO	450	780	
Wei	ight (kg)		1.0 (Without Battery)		
Siz	e (mm)		214x197 (LxH Without Battery)		
Applica	able Batt	ery	SKC-LB1820 /	SKC-LB1840	
Applicable	Charge !	Station	SKC-P120W / SKC-P80WN / SKC-80WN		
Applicable Torque Meter		KTM-150			
Applicable Bit Type			B	3/8°sq	

\* \* Free load speed will be fixed when battery volume is more than 17V (17~21V)



ANGLE TYPE BRUSHLESS HIGH TORQUE BATTERY SCREWDRIVERS SERIES **SKC-PTA-L Series** 




Spec	cifica	tion	s								
				SKC-PTA	<b>L150</b> Series	h	SKC	- <b>PTA-L</b> 300 S	eries	SKC-PTA-L600 Series	
	Model		SKC-PTA-L50F	SKC-PTA-L70	SKC-PTA-L120	SKC-PTA-L150	SKC-PTA-L80F	SKC-PTA-L150F	SKC-PTA-L300	SKC-PTA-L450	SKC-PTA-L600
Inpu	ut Voltage	е					18V				
Torque	Hard J	Joint	2~5	2.5~7	6~12	8~15	3~8	8~15	12~30	15~45	25~60
(N.m)	Soft J	oint	2~4	2.5~5.6	6~9.6	8~12	3~6.4	8~12	12~24	15~36	25~48
Repeatable	e Torque A	Accuracy					±5%				
Torque	Adjustn	nent				li	nternal Steples	SS			
Free S	Speed	НІ	1200	850	550	350	1200	850	420	200	200
(r.p.m)	±10%	LO	800	550	350	220	800	550	270	130	130
We	eight (kg)		1. (Without	25 Battery)	1.5 (Without Battery)	1.85 (Without Battery)	1.9 2.85 (Without Battery) (Without Batt				
Len	gth (mm	)		OO : Battery)	415 (Without Battery)	440 (Without Battery)		461 (Without Battery)		5:	30 t Battery)
Applic	able Bat	tery		SKC-LI	31820B			SKC-LB1820C	:	SKC-L	B1840
Applicable Charge Station SKC-P80WN-D					SKC-P80WN-E	)	SKC-P120W /	P80WN / 80WN			
Applicabl	le Torque	Meter		KTM-150		KTM-250	KTM-150	KTM-250		KTM-1000	
Applicable Bit Type  B 9.5  Applicable Bit Type  B 9.5  B 9.5		B 9.5 9.5 6.35 Hex. 6.35mm	W Q		w \text{\tiny{\text{\tin}\text{\ti}\\\ \tintett{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\ti}\}\\\\ti}\\\\\\\\\\\\\\\\\\\\\\\\\	w	] (D)				

<sup>\*</sup> Free load speed will be fixed when battery volume is more than 17V (17~21V)


BRUSHLESS LOW TORQUE BATTERY SCREWDRIVERS SERIES SKC-PTA-BS Series




#### **Torque Range Reference Chart**

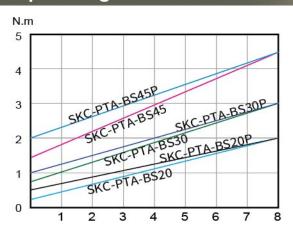

#### **External Dimension**

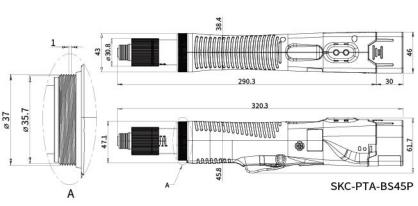

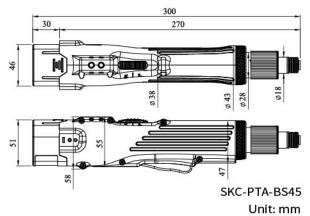

## **Specifications**

1	Model		SKC-PTA-BS20	SKC-PTA-BS30	SKC-PTA-BS45	SKC-PTA-BS20P	SKC-PTA-BS30P	SKC-PTA-BS45P	
Inpu	Input Voltage		10.8V				10.8V		
Torque	Hard J	oint	0.3~2.0	0.8~3.0	1.5~4.5	0.5-2	1-3	2-4.5	
(N.m)	Soft J	oint	0.3~1.6	0.8~2.4	1.5~3.6	0.5-1.6	1-2.4	2-3.6	
Repeatable	Torque Ac	curacy		±3%			±3%		
Torque	Adjustm	ent	E	External Stepless External Steple				3	
Free Sp	Free Speed HI		1200	1200	700	1200	1200	700	
(r.p.m) :	±10%	LO	850	850	500	<del></del>	-:	-	
We	eight (kg)		0.7	7 (Without Batte	ry)	0.72 (Without Battery)			
Si	ze (mm)		270X60 (LXH Without Battery)			290X62 (LXH Without Battery)			
Applica	able Batte	ery	SKC-LB1025S			SKC-LB1025S			
Applicable	Charge S	Station	SKC-P50WN-S			SKC-P50WN-S			
Applicable Torque Meter		KTM-150			KTM-150				
Applicable Bit Type		A		9.5 9.5 6.35 Hex. 6.35mm		B 9.5 9.5 Hex. 6.35mm	35		

#### **Accessories**

90 Degree Attachment KL-1S




Applicable to SKC-PTA-BS series



**BRUSHLESS LOW TORQUE BATTERY SCREWDRIVERS SERIES** SKC-PTA-BS Series



## External Dimension

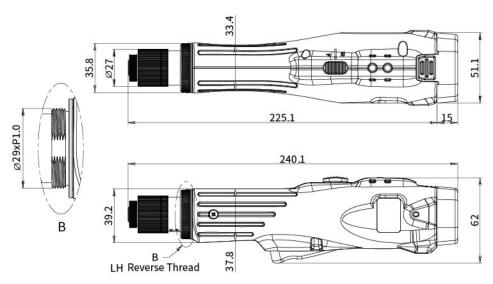


Unit: mm

#### **Specifications**

· ·					
ji	Model		SKC-PTA-BS12	SKC-PTA-BS12S1	
Inpu	Input Voltage		7.2V		
Torque	Hard Joint		0.2~1.2	0.2~1.2	
(N.m)	Soft .	Joint	0.2~0.96	0.2~0.96	
Repeatable Torque Accuracy		±3	%		
Torque	Torque Adjustment		External	Stepless	
Free Sp	Free Speed HI		1000	500	
(r.p.m) :	±10%	LO	700	350	
We	ight (kg)		0.53 (Without Battery)		
Si	ze (mm)		225X62 (LXH Without Battery)		
Applic	able Bat	tery	SKC-LB0725S		
Applicable	Charge	Station	SKC-P25W		
Applicable Torque Meter			KTM-15		
Applicable Bit Type			B 9.5 9.5 6.35 Hex. 6.35mm		

## Torque Range Reference Chart

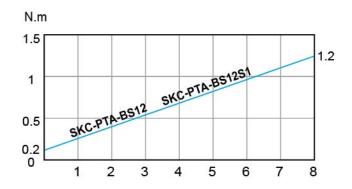



## **KILEWS**\* IMPACT INDUSTRIAL CORDLESS


BRUSHLESS HIGH TORQUE BATTERY SCREWDRIVERS SERIES SKC-PTI Series



#### **Product Features**

- The high power brushless motor was researched, developed, and produced by Kilews, with 1 year warranty.
- The best choice for industrial production and assembly with heavy instant beat, can reach 3100 times per min. Best-suited for fastening the big nut for heavy industrial.
- The maximum torque can reach to 200 N.m and applicable for heavy industry assembling.
- Adopting Japanese high performance Li-ion (Li-Mn) battery which has longest standby time and lifetime.
- The cordless battery screwdriver has beep alarm warning when the battery power capacity is low. The red LED will flicker when 20% left of battery power capacity and light up continuously when 10% left of battery power capacity. User can be reminded to replace the battery by the LED warning light.
- The user can base on the requirement to select HI/MID/LO torque forces via the electrical switch to prevent unnecessary hammer consumption.
- •LED illumination, LED will light up while screwdriver is operating to help user to see the fastening object status and to make sure the screws are aimed to exact positions.
- In order to hold the cordless battery screwdriver comfortably, the shape is designed to be 10 degrees elevation and balanced as good ergonomic.
- •In order to extend battery operating time, the cordless screwdriver will turn to sleep mode automatically when it idled over 3 seconds. Sleep mode helps to save electricity and extend battery life time.

#### **External Dimension**

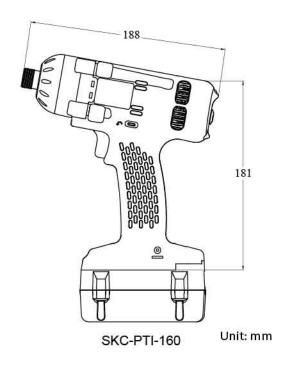

Model		SKC-PTI-200	SKCPTI-160	
Input Voltage	e	18V	18V	
Free Speed (r.p.m)	) ±10%	0~2100	0~2100	
B.P.M		0~3100	0~2800	
Torque(N.m	)	0~200	0~160	
	HI	0~200	0~160	
Impact modes	MID	0~160	0~120	
	LO	0~120	0~80	
Weight (kg)		1.1(Without Battery)		
Size (mm)		188x181 (LxH Without Battery)		
Applicable Bat	tery	SKC-LB1840	/ SKC-LB1820	
Applicable Charge	Station	SKC-P120W / SKC-	P80WN / SKC-80WN	
Applicable Bit Type		W	B	


# KILEWS\* IMPACT INDUSTRIAL CORDLESS

## BRUSHLESS MEDIUM TORQUE BATTERY SCREWDRIVERS SERIES

**SKC-PTI Series** 




## Function / Opearating Introduction

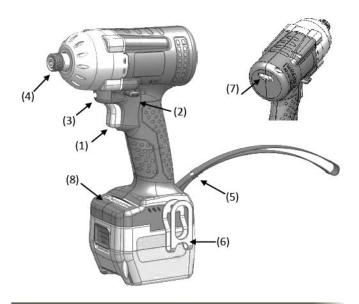

#### **Function Name Table**

No.	Description	No.	Description
(1)	Trigger Switch	(5)	Wrist Strap
(2)	Forward/Reverse Lever	(6)	S Waist Hook
(3)	LED Light	(7)	Indication Light
(4)	Bit Sleeve	(8)	Torque Adjustment Light

#### **External Dimension**

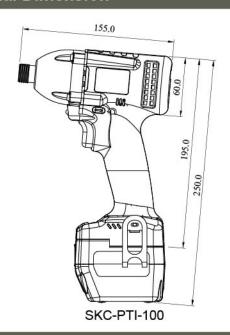

Unit: mm

#### **Product Features**

- •5 steps of torque adjustment with LED indication. User can set torque output according to their requirement to prevent unnecessary hammer consumption. Fastening status will also be shown on LED indication.
- Ergonomic grip design for comfort operation and reduce operator fatigue from long time operation.

Model		SKC-PTI-100	SKCPTI-50			
Input Voltage		18V	18V			
Free Speed (r.p.m)	±10%	0~2300	0~2300			
B.P.M		0~3000	0~3000			
Torque (N.m)		0~100	0~50			
	1	0~20	0~7			
Impact modes	2	0~40	0~15			
	3	0~60	0~25			
	4	0~80	0~35			
	5	0~100	0~50			
Weight (kg)		1.0 (Without Battery)				
Size (mm)		155x195 (LxH Without Battery)				
Applicable Battery		SKC-LB1820B				
Applicable Charge S	Station	SKC-P80WN-D				
Applicable Bit Ty	/pe	B 15 - 6 35 mm/No 3 5 mm/N	B 9.5 9.5 6.35 Hex 6.35mm			




# SEMI-AUTOMATIC INDUSTRIAL CORDLESS BRUSHLESS MEDIUM TORQUE BATTERY SCREWDRIVERS SERIES SKC-PTS Series



#### **Product Features**

- The high power brushless motor was researched, developed and produced by Kilews, with 1 year warranty.
- The best choice of industrial tool which can set the maximum torque up to 12 N.m, and the repeatable torque accuracy within ±10%.
- Adopting Japanese high performance Li-ion (Li-Mn) battery which has longest standby time and lifetime.
- •The cordless battery screwdriver has beep alarm warning when the battery power capacity is low. The red LED will flicker when 20% left of battery power capacity and light up continuously when 10% left of battery power capacity. User can be reminded to replace the battery by the LED warning light.
- •The cordless battery screwdriver has built-in indicating light to indicate the fasten procedure. The green LED will light up and give a short beep warning for every fastening screw. Conversely, the red LED will light up and give a long beep warning if the screw is fastened incorrectly or NG.
- LED illumination, LED will light up while screwdriver is operating to help user to see the fastening object status and to make sure the screws are aimed to exact positions.
- Users can select HI/LO speed via the electric switch to meet the operation requirement.
- In order to hold the cordless battery screwdriver comfortably, the shape is designed to be 10 degrees elevation and balanced as good ergonomic.
- •In order to extend battery operating time, the cordless battery screwdriver will turn to sleep mode automatically when it idled over 3 seconds. Sleep mode helps to save electricity and extend battery life time.

#### External Dimension

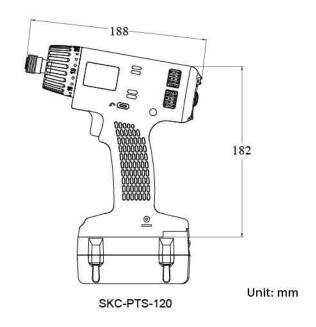


Specif	icati	ions						
Me	odel		SKC-PTS-120	SKC-PTS-80	SKC-PTS-50			
Input	Input Voltage			18V				
Torque	Haro	d Joint	6~12	4~8	1.5~5			
(N.m)	Soft	Joint	6~9.6	4~6.4	1.5~4			
Repeatable Torque Accuracy			±10%					
Torque A	djustn	nent	23+MAX Steps					
20 (20	Free Speed (r.p.m) ±10%		700	1200	2200			
			500	900	1600			
110000000000000000000000000000000000000		LO	350	600	1100			
Weig	ht (kg)		1.0 (Without Battery)					
Size	(mm)		188x182 (LxH Without Battery)					
Applicat	le Bat	tery	SKC-LB1820 / SKC-LB1840					
Applicable Charge Station			SKC-P120W / SKC-P80WN / SKC-80WN					
Applicable Bit Type			B W W 3/8°sq					






#### **Product Features**


- •Built-in LCD display shows recharging status. If the temperature is over the limit when recharging, the charge station will activate the protection function to stop recharging.
- Charge station can identify whether battery is supplied by KILEWS. When other brands of batteries installed on the charge station, it will not start charging process for the safety protection.
- Charge station can detect recharging time and battery capacity automatically. If any unusual situation happens during recharging, it will give an alert beeps and warning light to warn users.
- Auto buzzer reminds when battery is fully recharged.
- •Small size, light weight, quick recharge, and wide voltage range 100~240ACV can be applicable worldwide.







SKC-P70W / SKC-P50W



SKC-P120W

Specificati	ons							
Model	SKC-P120W	SKC-P80WN	SKC-80WN	SKC-P80WN-D	SKC-P70W	SKC-P50WN-S	SKC-P50W	SKC-P25W
Input Voltage	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V	100V~240V
Output Voltage	21V DC	21V DC	21V DC	21V DC	16.8V	12.6V	12.6V	8.4V
Output Current	3.0~4.5A	3.0A	3.0A	3.0A	3.0A	3.0A	3.0A	3.0A
Applicable battery model	SKC-LB1820/1840	SKC-LB1820/1840	SKC-LB1820/1840	SKC-LB1820B/C	SKC-LB1425	SKC-LB1025S	SKC-LB1025M	SKC-LB0725S
Battery Identification	V	٧	(4)	٧	V	٧	٧	٧
Buzzer	٧	٧	(#)	٧	V	٧	٧	٧
Cooling fan	V	ā	(9)		(4)		:5	#
Dimensions(WXLXH)	160X170X80mm	145X115X80mm	145X115X80mm	145X115X80mm	145X115X75mm	145X115X93mm	145X115X75mm	115X145X101mm
Weight	1068g	530g	530g	530g	460g	470g	460g	430g
LCD Display	V	Ģ	*	÷	*	( <b>#</b> )	1 (6)	<u>=</u>
Safety Certification	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE-ETL	CE,ETL

# KILEWS\* RECHARGEABLE BATTERIES SKC-LB Series









SKC-LB0725S

#### **Product Features**

- Adopting Japanese high performance Li-ion (Li-Mn) battery.
- Built in protection device to prevent battery overcharge and over discharge.
- The latch design increases intensity and convenience when assembling or dismantling the rechargeable battery from the cordless screwdriver.
- •Fully charged voltage: 21V, low-voltage protection: 13.5V, over-temperature protection (discharge): 72°C.
- Battery ID identification design, which only allows original charge station to recharge the battery to secure battery safety and extend battery lifetime.









Battery charging time reference									
Battery Model / Capacity	SKC-P120W	SKC-P80W	SKC-80W	SKC-P80W-D	SKC-P70W	SKC-P50W-S	SKC-P50W	SKC-P25W	
SKC-LB1820	40 min.	40 min.	40 min.						
SKC-LB1840	60 min.	80 min.	80 min.						
SKC-LB1820B/C				40 min.					
SKC-LB1425					40 min.				
SKC-LB1025S						40 min.			
SKC-LB1025M							40 min.		
SKC-LB0725S								40 min.	

Specifications								
Battery Model	SKC-LB1820	SKC-LB1840	SKC-LB1820B	SKC-LB1820C	SKC-LB1425	SKC-LB1025S	SKC-LB1025M	SKC-LB0725S
Voltage	18V	18V	18V	18V	14.4V	10.8V	10.8V	7.2V
Capacity	1950mA/hr	3900mA/hr	2000mA/hr	2000mA/hr	2500mA/hr	2500mA/hr	2500mA/hr	2500mA/hr
Rated voltage	18V	18V	18V	18V	14.4V	10.8V	10.8V	7.2V
Power	35Wh	70Wh	36Wh	36Wh	36Wh	27Wh	27Wh	18Wh
Cells Permutation	5 series 1 parallel	5 series 2 parallel	5 series 1 parallel	5 series 1 parallel	4 series 1 parallel	3 series 1 parallel	3 series 1 parallel	2 series 1 parallel
Weight	430g	720g	430g	430g	320g	200g	270g	119g
Dimensions(mm)	119X90X40	119X90X59	92X75X63	92X75X63	107X75X43	51X46X90	99X75X43	51X44X70
Certification	CE,ETL	CE,ETL	CE,ETL	CE,ETL	CE,TUV	CE,TUV	CE,TUV	CE,TUV
UN38.3 Inspection report	YES							

# \* TORQUE METERS KTM Series

# TRANSDUCER TYPE IMPACT TORQUE TESTER KTM-IWT50 / KTM-IWT400

Patented design for testing various power type tools, impact wrench, oil pulse tool and manual wrench.

- Can set peak value sampling time (0 99 sec.)
- · Can set sampling time after peak detected
- . Double displays to show peak and real time value
- Auto clear peak value
- Optional torque unit : kgf·cm , N.m, lbf·in







KTM-IWT400

Model No.	Torque Test Ra		ange	Applicable	Bolt	Torque	Size	Weight	Power	Accessory	
model No.	Kgf.cm	Lbf.in	N.m	Bolt	Class	Accuracy	(mm) (KG)		1 01101	Accessory	
KTM-IWT50	0 ~ 509	0 ~ 442	0 ~ 50	M6 / M8 / M10	12.9	±10% of reading	200 x 190 x 285	12.6	Input 100 - 240 Vac	M6 & M8 &M10 joint and bolt are included in tester	
KTM-IWT400	0 ~ 4079	0 ~ 3540	0 ~ 400	M10 /M12 / M14 / M16	12.9	±10% of reading	295 x 200 x 305	29.7	Input 100 - 240 Vac	M10 & M12 & M14 & M16 joint and bolt are included in tester.	

#### KTM-1000 / 250 / 150 / 15 / 6 / 50S

- LED can identify the test range of torque setting by needed user. If the result is not complying to torque range setting, light will be warned.
- •USB connector is only used for data output, it is convenient for user to work with computer.
- Auto-zero can be selected and zero reset becomes unnecessary for user.
- Automatically test values about maximum, minimum and mean.
- KTM-6, KTM-15, KTM-150, KTM-250, KTM-1000 are suitable
- for shut off type screwdriver only.
- KTM-50S is for semi-shut off type electric screwdriver only.

KILEWS

KTM-1000



KTM-250




KTM-6 / 15 / 150





Мо	del	KTM-1000	KTM-250	KTM-150	KTM-15	KTM-6	KTM-50S			
	(kgf.cm)	50~1000	3.0~250.0	1.5~150.0	0.15~15.0	0.02~8.0	0.5~50.0			
Measuring Ranges	(Lbf.in)	45~885	3.0~217.0	1.5~130.0	0.15~13.0	0.02~7.0	0.5~43.4			
Ranges	(N.m)	5~100	0.30~25.00	0.15~15.0	0.015~1.500	0.2~80.0( cN.m)	0.05~4.90			
Accu	ıracy	+/- 0.5%(20~100N.m) +/- 1.0%(10~20N.m) +/- 2.0%(5~10N.m)	ON.m) +/- 0.5%							
Power	Supply	3.7V, 4400mAh Lithium Ion	Ah Lithium Ion 4.8VDC (Ni-MH chargeable battery 1.2VX4 cell 1650mAh)							
Chargi	ng Time	8 hours	8 hours From empty -3 hours							
Operat	ion Time	8 hours		About	12 hours					
Batte	ry Life	Charge	eable for 300 times o	r more. However, it v	aries depending	on operating conditi	ons.			
Size	e(mm)	229(W)X102(D)X80(H)	160(W)X210(D)X45(H)	230	(W)X125(D)X65(	H)	230(W)X123(D)X65(H)			
Weig	ıht(kg)	2.7	2.0	1.8		1.8	1.8			
Exclusiv	e Charger	Input : AC100V~240V 50/60Hz Output : DC5V 1.0A Max		Input : AC100V~240	V 50/60Hz Outp	out : DC12V 400mA				
Acce	essory	Torque measuring adaptorX1 SJ-1000	Torque measuring adaptorX1 AJ-250	Torque measuring adaptorX3 AJ-150 / AJ-50 / AJ-15K	Torque measuring adaptorX2 AJ-15 / AJ-3	Torque measuring adaptorX1 AJ-3	Torque measuring adaptorX1 AJ-50S			



#### Screwdriver Holder & Auxiliary Arm Series KH, KP-AUX Series

#### Screwdriver Holder

Model	Applicable Models
KH-1	SKC-PTA-BS(&KC)
KH-2	SKC-PTA-BS
KH-5	SKC-PTA-BS12 Series
KH-6	SKC-PTA-BE120/90/50F/60/35F SKC-PTA-B120/90/50F/60/35/35F SKC-PTA-120/80
KH-1L	SKC-PTA-BS(P) (&KC )
KH-2L	SKC-PTA-BS(P)

The new screwdriver holder series can be fixed on the table or wall. Position angle of the rack can be adjusted for operator easier to pick up and restore the screwdriver.




**Auxiliary Arm** 

Model No.	Max torque (Nm)	A(mini/maxi) cm	diameter(mm) Tool ∅
KP-AUX-C50-1000 KP-AUX-E50-1000 KP-AUX-B50-1000 KP-AUX-D50-1000	50	43~100	38.5~52
KP-AUX-C50-1200 KP-AUX-E50-1200 KP-AUX-B50-1200 KP-AUX-D50-1200	50	50~120	36.9~32



**Torque Locker** Model **Applicable Models** SKC-PTA-BS KC-28A SKC-PTA-BT Series

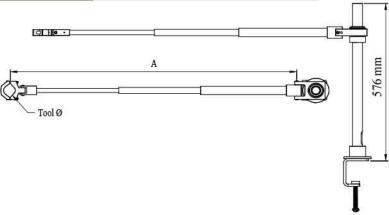














STANDARD




KP-AUX-50 For all kind of screwdriver diameter from 38.5~52mm

**OPTIONAL** 

KP-AUX-50-1 For SKC-PTA-120/80



KP-AUX-50-2 For SKC-PTA-220/150



KP-AUX-50-3 For SKC-PTA-B120/B90/B50F



# **INNOVATION FOR SCREWS FASTENING**

The official website shall prevail when specifications and designs are subject to change in this content.