


Project Name: _	
Date:	Note:

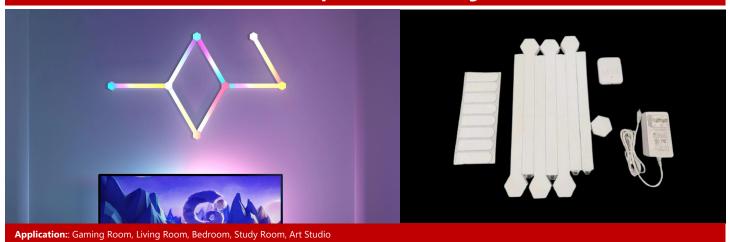

FEATURE

LED Smart Space Linear Wall Lights is a cutting-edge lighting solution that combines modern design with smart technology. This triangular-shaped LED light fixture not only adds a touch of contemporary style to any space but also offers intelligent features for enhanced functionality.

It's a DIY design masterpiece that allows you to personalize your lighting experience. With easy-to-follow assembly instructions, you can create a customized setup that fits your unique style and preferences. The smart functionality is at your fingertips through a dedicated mobile app, offering convenient control over color choices, brightness levels, and scheduling.

Seamless integration with popular voice-activated assistants like Alexa and Google Assistant takes your lighting experience to the next level. Simply command your lights using voice prompts, creating a hands-free and intuitive way to manage your smart home environment. Elevate your space with the perfect blend of creativity, intelligence, and convenience with the LED Smart Triangle Light.

SPECIFICATIONS	
Product Name	Space Linear Light Bar
Input	AC 100-240V
Power Supply Power	36W
Color	RGBIC
Max Colors	16.7 million
Working Temperature	-20℃ - 40℃
Lifespan	25,000 hours
Certification	CE FCC RoHs
Dimmability	Yes (App/Voice/Controller)
Communication Protocol	WiFi+Bluetooth (2.4Ghz b/g/n)
Compatible	Google Assistant, Amazon Alexa, Siri

Light A Light C Light C SPECIFICATIONS 242 Light C

What's in the box:

Power Supply:1PC / Controller: 1PC/ Instruction Manual: 1PC Light A: 6pcs/ Light B: 1pcs/ Light C: 1pc/ Straight Linker: 8pcs Adhesive Tape: 9pcs

Package Info

	Inner Box		
Size (mm)	N.W. (KG)	G.W. (KG)	Qty (set)
356 x 140 x 82	0.8	0.9	1


Master Carton			
Size (mm)	N.W. (KG)	G.W. (KG)	Qty (set)
515 x 372 x 448	16	17	18



Project Name: _	
Date:	Note:

INSTALLATION

The Introduction of Controller

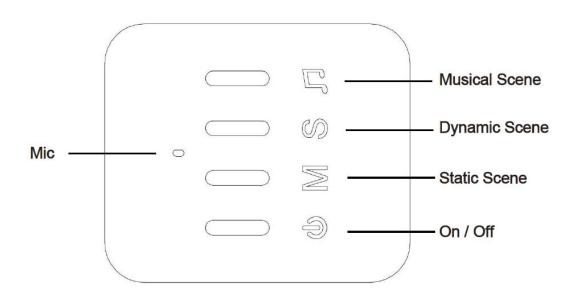

Operation Steps of Mobile App Connection

- 1. A smart phone or tablet running IOS 8.0 (or above) or Android 4.3 (or above).
- Download the "Tuya Smart" App from the App Store (IOS devices) or Google Play (Android devices).







- 3. Open the bluetooth, WIFI (2.4Ghz) and Tuya Smart App, Click"+", Choose "Auto Scan".
- 4. Waiting for the App find the device.
- 5. Enter Passward and Connect the wifi (2.4Ghz). Waiting for the connection.
- 6. Done!



Project Name: _	
Date:	Note:

INSTALLATION


In order to prevent your light from falling off the wall, please pay attention to installation matters.






 Please make sure that the wall or other installation surface is clean and free of dust or water.






Use at least 1pcs of double-sided adhesive mounting tapes for each light.





3. When installing the light, be sure to press it hard for 30s after sticking to the wall to ensure stability.






Note: The double-sided adhesive mounting tapes that comes with the product is not suitabe for brick walls,wallpaper,wooden boards,ceilings, walls with ash falling and other uneven surfaces.




Project Name: _	
Date:	Note:

INSTALLATION

APP interface

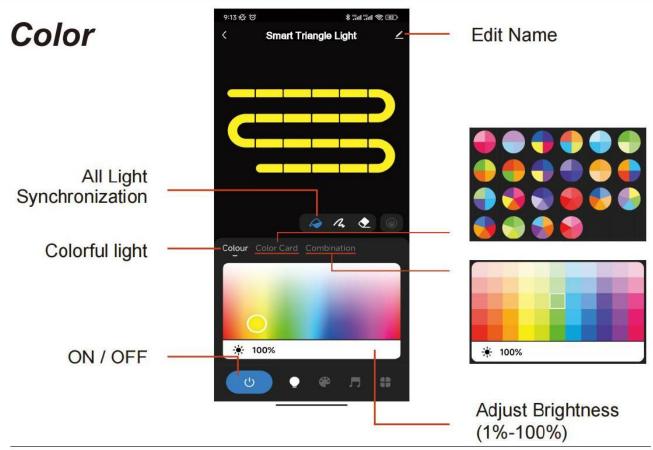








Project Name: _	
Date:	Note:

INSTALLATION

Preset Scene

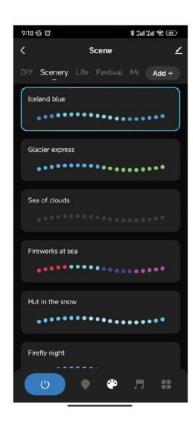




Plan


*11111 R I

DIY Scene

44 Scenes for option

Music

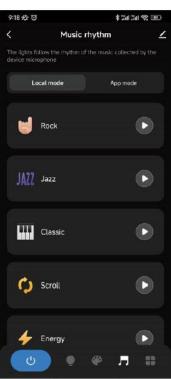

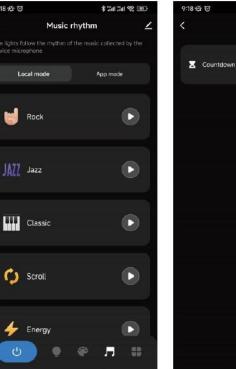

Create custom light scene by yourseif

Schedule

Create your own plan

music beats or your microphone.

Lights colors will

change with the