



Taximeter

User Manual

F2 Standard
F2 RTC (real time clock) ver.

WARRANTY TERMS AND
CONDITIONS

Digitax warrants this product to be free from defects in materials and workmanship for a period of twelve calendar months from the date of installation.

To obtain the benefits of this warranty, the registration card must be completed and returned to the factory or your national importer within 14 days of purchase.

In case the taximeter needs to be repaired, it must be sent, free of transportation cost, back to the manufacturer or to the service center as indicated by the local representative.

This warranty is void if the equipment is modified or misused in any way or serviced by unauthorized persons.

No responsibility can be accepted for any loss or damage caused in transit, except for

Serial Nr.

Installation Date

Name

.....

Address

.....

Tel. No.



For Hire-Stopped-Hired

The taximeter has, in its front side, 5 keys called: OP, K1, K2, K3, K4.

The taximeter has three working modes: For Hire, Stopped and Hired.

The taximeter's working modes are selectable by pressing the OP button in the



In any of the above taximeter's working mode (FOR HIRE, HIRED, STOPPED), the other four keys K1, K2, K3, K4 will exploit a different function, as below described.

A) Taxi in “ For Hire ”

When the Taxi is parked or it moves without any passenger on board, the taxi driver selects the For Hire position. Once the taxi starts the trip, the taxi driver

- K3** Shows Date and clock (RTC)
- K4** Shows Year (RTC)
- OP** Selects Hired

B) Taxi in “Hired ”

The “Taxi” roof sign will turn off and the taximeter starts the fare calculation by distance or time. At the end of the trip, the taxi driver has to select the Stopped

- K1** Scale up rates (if enabled)
- K2** Inserts Extra nr. 1 (if enabled)
- K3** Inserts Extra nr. 2 (if enabled)
- K4** Clear Extras
- OP** Selects Stopped

C) Taxi in “Stopped ”


In this position it can be possible to add other extras to the Fare. Press OP key to

- K1** Insert Special Extra
- K2** Inserts Extra nr. 3 (if enabled)
- K3** Inserts Extra nr. 4 (if enabled)
- K4** Adds Extras to the Fare
- OP** Select For Hire

How to set Time and Date (only RTC ver.)


Select For Hire position.

Press K1 and K3 at the same time.



Now the signs “FOR HIRE” and

The big display shows in the left digits the day number and in right digits the month.

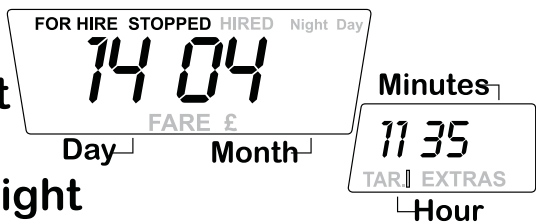

The small display shows: to the


Press K1 key to set the Day



Press K2 key to set the Month.



Press K3 key to set the

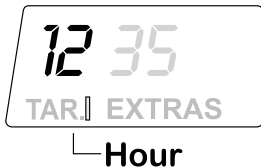

Press K4 key to set the Minutes.



Press OP key to set the Year.



Press K1 button to decrease the



Press K2 button to increase the



Press K2 button to restore the Year Manufacturing



Press OP button to end the programming procedure and go back to For Hire position.



Statistical Memory

The taximeter records and keeps data in 2 Memory Blocks, each one divided in 7 index. Block 1 can be read and erased freely, Block 2 can only be read.

Memory Content

- 1 Total Trips
- 2 Total Units
- 3 Total Kilometers in Hired/Stopped
- 4 Total Kilometers
- 5 Hours in Waiting Time
- 6 Income by the Fare
- 7 Income by the Extras

How to Read the Memories Content


Select the "FOR HIRE" position



Press "K2" + "K1" keys at

Now the sign "FOR HIRE" starts blinking.

The extras display will show: in the left digit the block and in the

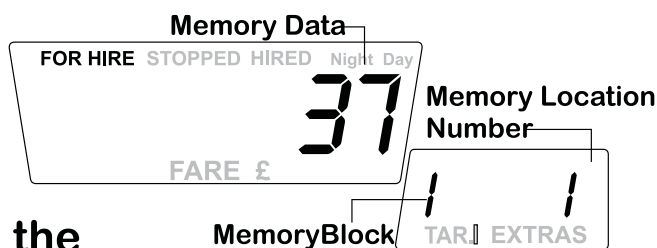

right digit the number of block index (1- 7). The main display

To increase the index number press K2 key.



To decrease the index number press K1 key.



Press K3 button to toggle between Block 1 and Block




P.S. From index n.1 a further K1 depression will go back to For Hire mode. The same would happen from index n. 7 with a K2 button

Press OP button to end the reading procedure and go back to For Hire position.





How to Print the Memories Content

Select the "FOR HIRE" position



Press K1 + K2 keys at the same time to enter in the "Statistical Memory Reading" procedure.

Reach the memory location n. 5 by pressing K2 key.

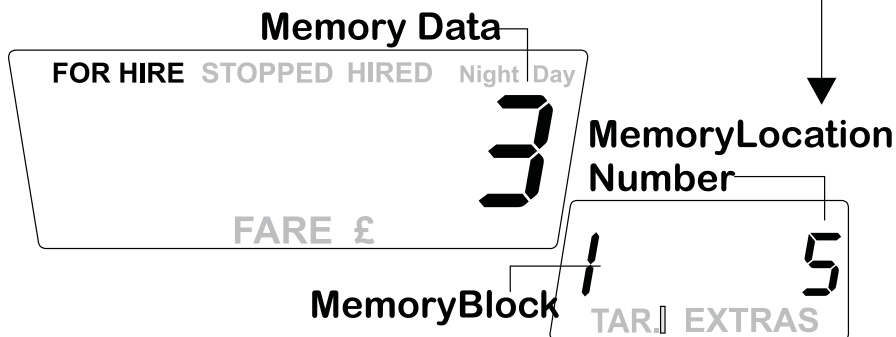

Reaching location n. 5, press K4 key to print out the content of both Block1 and Block2.

For Hire sign stops blinking and the printer will start.



Print




Press OP button to end the printing procedure and go back to For Hire position.



How to Erase the Memories Content

Select the "FOR HIRE" position

Press "K2" + "K1" keys at the



Now the sign "FOR HIRE" starts

Reach the memory location n. 6 by pressing K2 button.



Reaching location n. 6, press K4 button to print-out and erase all information contained in Block 1. After having printed-out the block 1 & 2, the F3 will erase the block 1 content.



*How to convert the local currency into Euro € and vice versa **

IN HIRED & STOPPED MODE

DEPRESS and RELEASE K3 key to toggle from the local currency to Euro and vice-versa

