



LMIC-WS Wall Switch Controller

Distributed by APEX Lighting & Controls

Bluetooth Wall Switch for LMIC-R Systems

Overview

Bluetooth-enabled wall switch controller for LMIC-R fixtures.

Communicates with mesh devices without being a node.

Designed for long battery life (up to 10 years).

Key Features

- 1 Manual On/Off & Dim control
- 2 Fits standard switch box
- 3 App override capability

Specifications


- 1 3VDC (2x1.5V batteries)
- 2 -4° to 120°F operating
- 3 3 x 4.75 in size
- 4 Range: 100 ft open / 35 ft interior

Installation

Provision same as LMIC-R. Use with at least one LMIC-R device. Install batteries only when ready to pair to prevent drain.

Operation

Buttons override app settings. Dim adjusts output by 5% per press. Motion sensor in app is non-functional (keep Off).

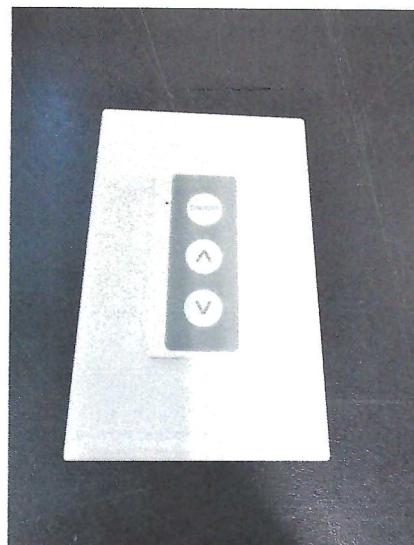

Support : 1-463-259-6751

Distributed by APEX lighting and controls