


HAMPTON STONE LINTELS

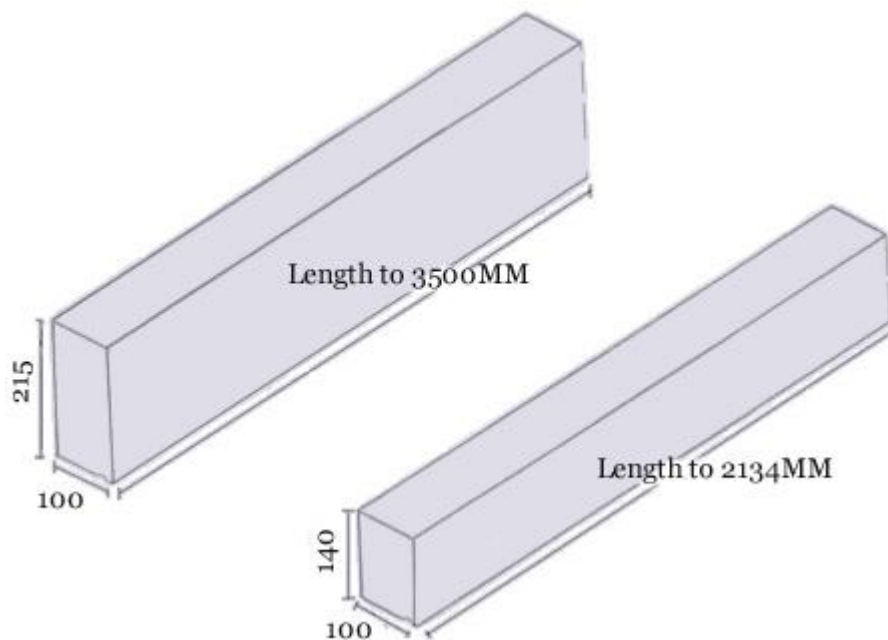

All Hampton Cast Stone lintels are reinforced for self – weight and handling purposes and for structural (load bearing) use.

They would satisfactorily support uniformly distributed loadings of 3KN / meter run. Available in Faced or Rough Cast finish

100 x 140mm high section (4" x 6")

Size	Length	Bottom Reinforcement	Top Reinforcement
915mm	(3'0")	1 x 10mm	1 x 6mm
1067mm	(3'6")	1 x 10mm	1 x 6mm
1216mm	(4'0")	1 x 10mm	1 x 8mm
1372mm	(4'6")	2 x 8mm	1 x 8mm
1524mm	(5'0")	2 x 8mm	1 x 8mm
1677mm	(5'6")	2 x 10mm	1 x 8mm
1829mm	(6'0")	2 x 12mm	2 x 8mm
1981mm	(6'6")	2 x 16mm	2 x 8mm
2134mm	(7'0")	2 x 16mm	2 x 8mm

100 x 220mm high section (4' x 9")

Size	Length	Bottom Reinforcement	Top Reinforcement
915mm	(3'0")	1 x 6mm	
1067mm	(3'6")	1 x 10mm	
1216mm	(4'0")	1 x 12mm	1 x 6mm
1372mm	(4'6")	1 x 12mm	1 x 8mm
1524mm	(5'0")	1 x 12mm	1 x 6mm
1677mm	(5'6")	2 x 10mm	1 x 8mm
1829mm	(6'0")	2 x 12mm	1 x 8mm
1981mm	(6'6")	2 x 12mm	1 x 8mm
2134mm	(7'0")	2 x 12mm	1 x 8mm
2286mm	(7'6")	2 x 12mm	1 x 8mm
2439mm	(8'0")	2 x 12mm	1 x 12mm
2581mm	(8'6")	2 x 12mm	1 x 12mm
2744mm	(9'0")	2 x 12mm	1 x 12mm
2896mm	(9'6")	2 x 12mm	1 x 12mm
3050mm	(10'0")	2 x 20mm	1 x 12mm
3200mm	(10'6")	2 x 20mm	1 x 12mm
3506mm	(11'6")	2 x 20mm	1 x 12mm

High-tensile reinforcement is used as standard, but can be replaced with stainless steel, if required, at additional cost. Please contact us for information on lintels in excess of 3.5 meters in length.

Hampton Cast Stone

Unit 7 Merretts Mill, Woodchester, Stroud, Gloucestershire, GL5 5EU

01453 836677

hamptoncaststone.co.uk

sales@hamptoncaststone.co.uk