



From AUTO Screen

Press and hold “+” and “-” for 5 seconds, until PS 4 is displayed

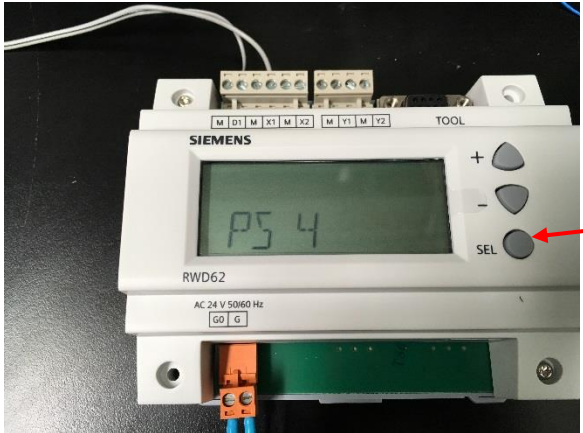


In PS4 Mode


Press “SEL” button to enter Parameter mode

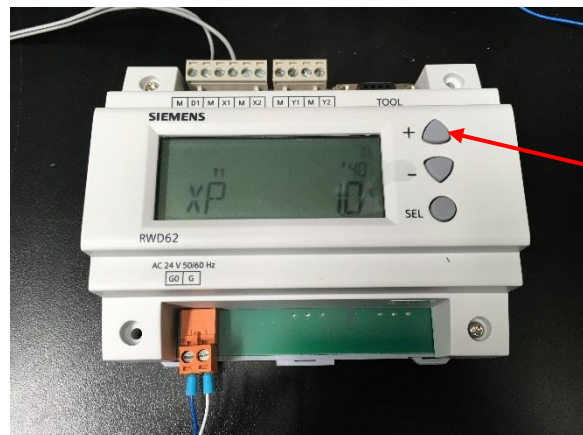


Press “+” scroll to “XP” (Proportional Band)

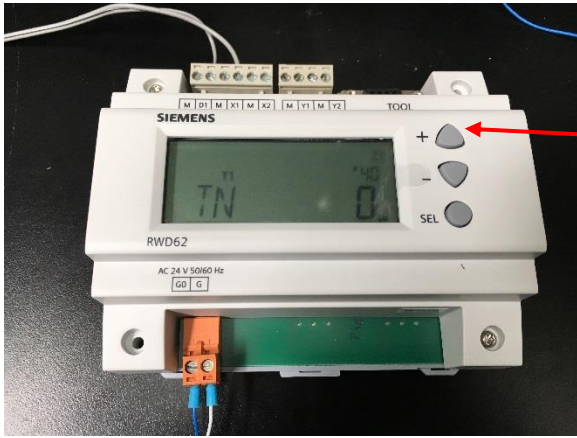


Press “+” to scroll to TN (Integral Time)

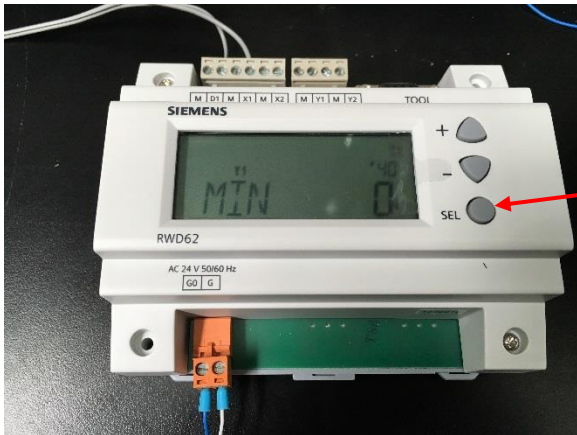


Press “+” to scroll to MIN Voltage setting
Press “SEL” to edit the value (value will flash)

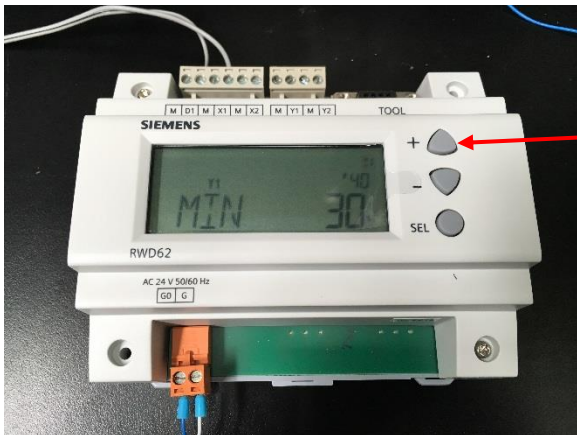


Press “+” until desired minimum 0-10v value value (0-100%)
Press “SEL” to save
Press “+” to go to next screen

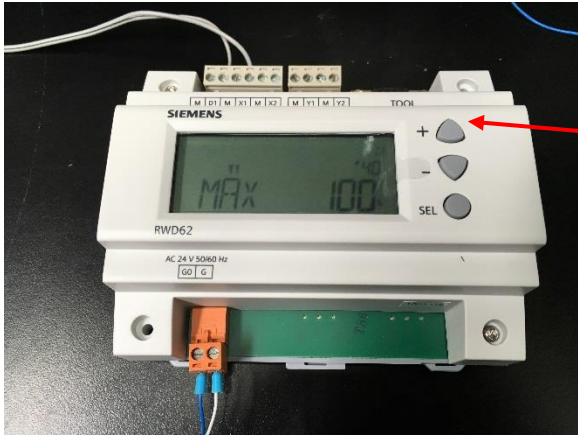


Maximum Value Screen, Press “+” to next screen

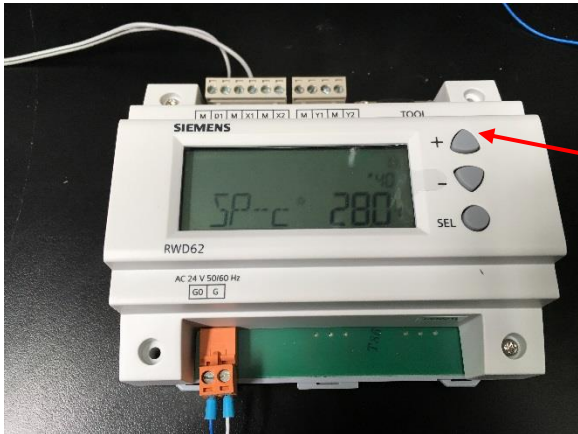


SP-C is Cooling Setpoint in Day mode (sun symbol)
To edit setpoint, press SEL (Value flashes)
Press “+” to increase setpoint
Press “-” to decrease setpoint
Press SEL to save setpoint (stops flashing)

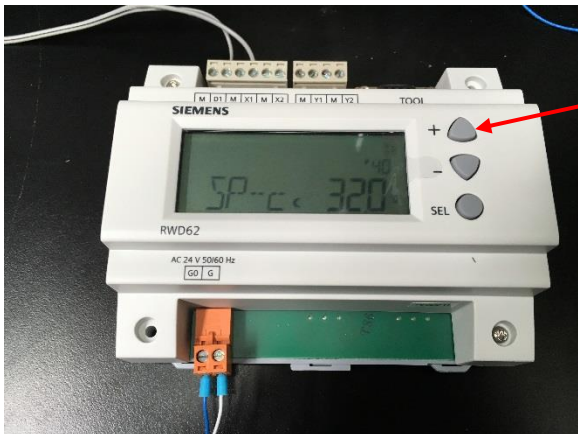

Press “+” to scroll through NIGHT Setpoint (Moon symbol)
Press “+” to scroll through next MENU Screen

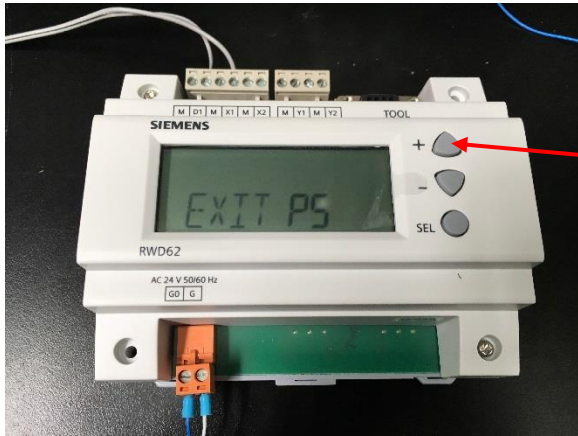

Press "+" to exit Programming mode

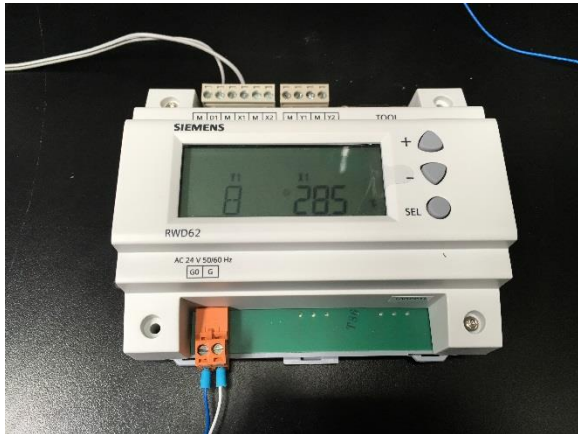

Changes have been saved and programming complete
Controller returns to auto mode