

Dog Training Collar



Please Read This Manual Before Use

Table of Contents


Quick Tips	3
Key Functions	4
Charging	6
Auto Power Saving Function	7
Pairing the Remote with Receiver	8
Testing The Unit Functions	9
Attaching TPU Belt to the Receiver	10
F.A.Q	12
Terms & Disclaimer	13
Few Training Tips	14

Quick Tips:

1. Charge the Remote and the Receiver before first use.
2. In order to use the Receiver, the Remote should be set to the correct Channel.
3. Adjust levels of Vibration and Shock mode in ascending order starting from 01 when put on dog's neck.
4. This device is meant to be used as a communication tool in training sessions to grab dog's attention. Make sure intensity levels are not discomforting.
5. Majority of dogs can be trained with Beep or Vibration mode alone, and Shock mode is not necessary most of the times but only optional.
6. Check dog's skin regularly when using Shock training mode.
7. We recommend working on one behaviour at the time to avoid confusion for your dog.
8. Remote and Receiver will go to standby mode when inactive.


Key Functions

1. **Antenna:** Signal Transmitter
2. **LED Light:** Press 10 to turn it on, press 10 again to turn off.
3. **LCD Screen:** Displays Modes, Levels, Channels and its battery level
4. **Shock button:** Press 4 to switch to shock mode. Press + or - to adjust levels between 0 to 99. Press Shock button again to make the receiver shock.
5. **Vibration button:** Press 5 to switch to vibrate mode. Press + or - to adjust levels between 0 to 99. Press vibrate button again to make the receiver vibrate.
6. **Sound button:** Press 6 to switch to sound mode. Press and hold for repetitive beeps. Sound mode is not adjustable in levels.
7. **- button:** Press to decrease levels.
8. **+ button:** Press to increase levels.
9. **Channel button:** Press CH to switch between Channels. (CH1/CH2/CH3)
10. **Light button:** Press 10 to turn on the light, press again to turn it off.

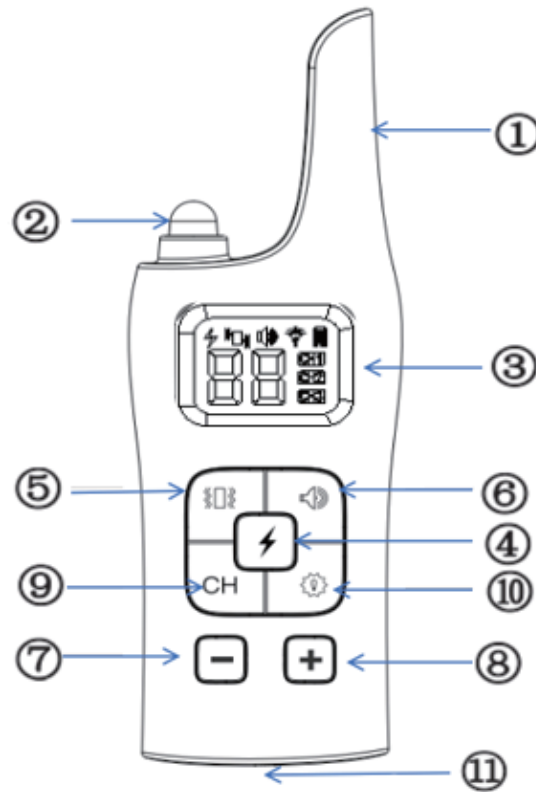

Press and hold 10 for 2 seconds to turn on the white locator LEDs on the receiver, press and hold 10 for 2 seconds to turn off the white locator LEDs on the receiver. LED locators will go back off after 5 minutes automatically.

11. **Charging port** of the remote.
12. **Power button:** Press to turn on the receiver, the receiver will beep once. Press again to turn off the receiver, it will beep twice before shutting off.
13. **Charging port** of the receiver.
14. **Static contact points:** Choose the appropriate pins and install the rubber caps for extra protection of dog's skin.
15. **Indicator light:** The light will flash when: it's on, pressed vibrate/shock/sound button or charging.

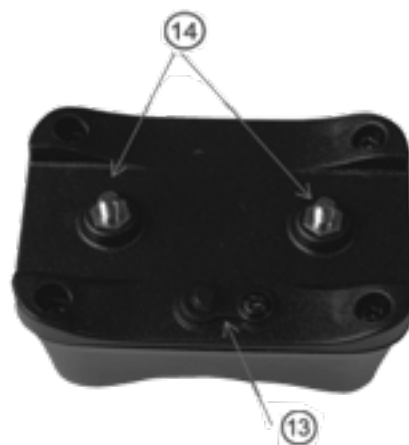

16. **Night Time LED locators:** Press and hold 10 for 2 seconds to turn on the white locator LEDs on the receiver, press and hold 10 for 2 seconds to turn off the white locator LEDs on the receiver. LED locators will go back off after 5 minutes automatically.



Charging:

A. Charging the Remote:

1. Plug the cable into the charging port.
2. Connect the USB adapter and plug it into the outlet
3. When in charge, the battery icon on the top right corner of the display will be flashing; when fully charged, it will stop flashing.

B. Charging the Receiver:

1. Open the rubber cap on the receiver charging port.
2. plug in the cable into the charging port.
3. connect the USB adapter and plug into the outlet.
4. The LED indicator will be flashing when charging, it will stop flashing once fully charged and will be continuously on.
5. Put back the rubber cap when finished charging.



Note:

1. Charge the Remote and the Receiver for more than 5 hours for the first time charge.
2. When in charge, the receiver will be deactivated.

3. When the Remote is in low power, the battery icon on the top left corner of the display will be showing an empty battery.
4. When the Receiver is in low power, the indicator light will flash per second.
5. Charge the Remote and the Receiver fully before keeping idle for long times. It's necessary to recharge them every month for maintenance.

Auto Power Saving Function

1. Remote: Within 10 seconds of inactivity the display backlit will go off and within 30 seconds of inactivity the remote will go to standby mode. Press any button to reactivate the remote.
2. Receiver: Within 5 minutes of inactivity, the receiver will go to standby mode. Press Vibration/Shock/Sound button to reactivate the receiver.

Pairing the Remote with Receiver

1. Press any button to activate the remote.
2. Switch to desired channel by pressing CH button. (CH1/CH2/CH3)
3. Press and hold the power button on the receiver for 3 seconds, this makes the receiver beep and the indicator light blinking faster. This means the receiver is ready to pair.
4. Quickly, within 10 seconds of the previous step, press Vibration or Shock button which make the receiver go beep again. This means the remote and receiver are successfully paired.
5. If you need to pair 2 or 3 receivers, make sure to choose a different channel for each one.




Note:

In order to control the receiver, make sure you are on the correct channel.

Testing The Unit Functions (After being paired successfully)

Make sure the remote is set on the correct channel.

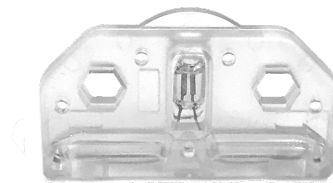

1. Testing Shock function:

Take the Test Bulb and place it on the Receiver's contact points. Press the Shock button (make sure it's above level 01). The Test Bulb will light up, momentarily.



2. Testing Vibration function

Press Vibration button (make sure the level is above 01). The receiver will vibrate.

3. Testing Sound function

Press Sound button, the receiver will beep twice.

Attaching TPU Belt to the Receiver

1. Install by inserting Receiver screws into the holes of the Collar. (We recommend nearest points to the Buckle, as shown in the picture below)

*** Do not tighten the bolts on the screws aggressively.**



2. Install the desired screw nuts on the belt.



3. Put on the Collar around dog's neck.



4. Make sure the contact points reaches dog's skin, depending on the thickness of fur. Install matching rubber caps on the screws for extra protection. (Test bulb can be used as screw driver if needed)

*** Do not tighten the bolts on the screws aggressively.**



5. Adjust the collar and make sure your dog is comfortable.



F.A.Q

Q: What weight range of dogs is this training collar suitable for?

A: Above 20 lb (10 kg)

Q: Is the receiver waterproof?

A: Yes, up to 1 meter depth for up to 30 minutes. it is also dust-proof.

Q: How long is the TPU collar?

A: 27.5 in or 70 cm

Q: What to do if the training collar set does not work?

A:

1. Check the battery levels on the **Remote** and **Receiver**, make sure they are fully charged.
2. If you chose **Vibration** or **Shock** mode, check if level is above 01.
3. Check if the **Receiver** is on. Press the power button to turn it on, it will beep once to turn on and beeps twice when turned off.
4. Check if you are in the correct **Channel**. Press **CH** button to switch channels.
5. Re-pair the **Receiver** with the **Remote**. (Refer to page 7)

6. If Shock mode is not effective, check if the screw caps are short, change to longer caps on the contact points.

Technical Data:	
Frequency	433MHz
Transmitter	3.7V 300ma LIP
Receiver	3.7V 300ma LIP
Receiver Casing	Waterproof, Dust-proof IP67
Remote Casing	Not Waterproof

Terms & Disclaimer

1. Do not open the receiver, doing so will void the warranty and will likely compromise the waterproof feature.
2. This remote will only pair with same model receivers.
3. To avoid accidental injuries, do not test shock mode with hands, use the provided test bulb kit instead.
4. Wipe dry before charging.
5. We only recommend this device for dogs heavier than 20lb (10kg) and older than 6 months.
6. We do not recommend attaching leash to receiver collar and walking the dog since the electrodes on the receiver might hurt dogs skin.

7. Do not leave the collar around dog neck for more than 12 hours to avoid irritations on skin.
8. Keep away from children.
9. Insert the rubber cap on the receiver back in place when finished charging for waterproof feature.
10. Avoid dropping this device on hard surfaces.
11. This device is a professional dog training tool. It is not intended to be used for any other activities. When in doubt, consult with certified dog trainers or your dog's veterinarian. Learn about local state laws before use.
12. Interference from the environment might cause the product to not work properly such as thunderstorm, large buildings, communication towers, etc.
13. We bear no liability for direct or indirect losses cause by use or misuse of this product. All the risks of using this product shall be borne by user.
14. By using this product, you agree to the terms mentioned above.
15. We reserve the right to change these terms at any time in future.

Few Training Tips

1. Reward your dog with food and treats to help achieve better results.

2. Do not use on dogs younger than 6 months old, pregnant, easily frightened, aggressive, left in heat, old, and dogs with not best of health.
3. Command verbally first, then supplement with corrective stimulus if needed. Be consistent with commands by using same words every time. Work on one single behaviour at a time to avoid frustration or confusion for your dog.
4. As an example, vibration could be used to be associated with warning, so the dog will be conditioned to respond and recognize vibration along with verbal command as a sign of warning.
5. Each dog skin is different, and each breed varies. Dog skins are different from human in terms of sensitivity; therefore, try to find the best level suitable for individual dogs by adjusting levels from 01 in ascending order and set on a comfortable level. All modes are meant to communicate with dog only.
6. Observe your dog's behaviour and respond accordingly. If dog shows signs of growling, aggression, biting, snarling while using the collar, stop using immediately and contact a professional trainer for consultation.
7. Some dogs are easier to train and some are harder. Having a training collar does not guarantee the desired result on every single dog. It is meant to supplement general training of the dog.