

2

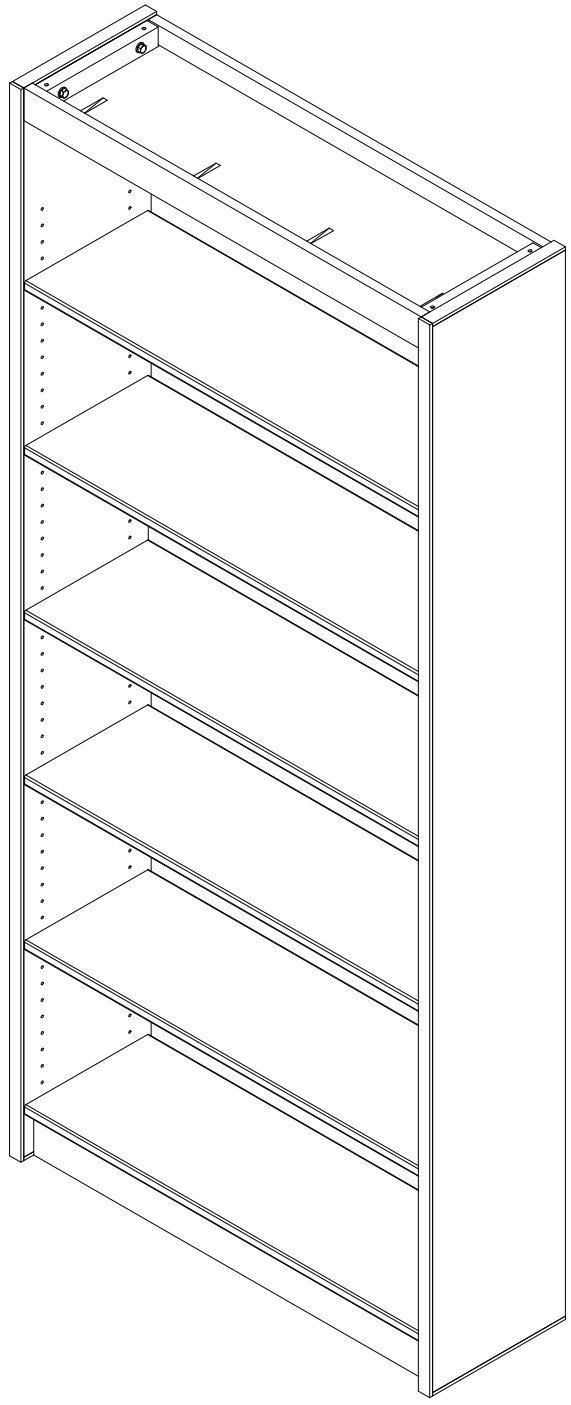
1

72 AND 82 STARTER ASSEMBLY INSTRUCTIONS AND PACKING LIST

Also used for 70 and 80H End of Range Shelving

B

B




A

A

2

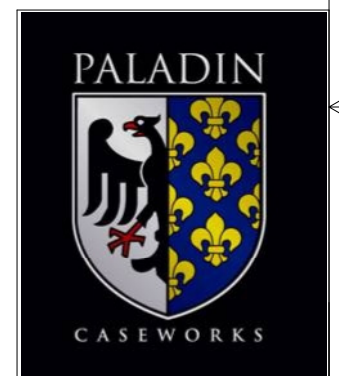1









ORDER NO:		17275	
DEALER			
PROJECT 72 & 82 SF SHELIVING			
SIZE	SCALE		
A			
DRAWN	DATE		
DG	5/1/2013		
DWG NO CSHF8212S.iam	REV		
SHEET 1 OF 3			

2




1

HARDWARE LIST IDI1300			
ITEM	QTY	DESCRIPTION	
1	2	MINI FIX POST	
2	2	MINI FIX CAM	
3	8	INSERT 5/16-18 FACTORY INSTALLED	
4	24	SHELF PIN	
5	8	5/16-18 x 1 3/4 HEX HEAD UNC	
6	8	5/16 FLAT WASHER	

2



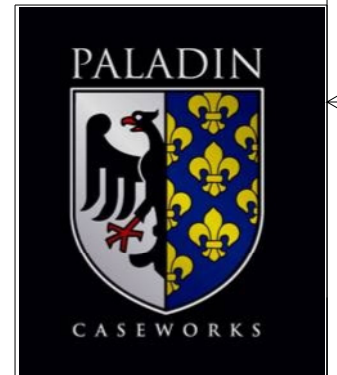1



ORDER NO:	
DEALER	
PROJECT 72 & 82 SF SHELVING	
SIZE A	SCALE
DRAWN DG	DATE 5/1/2013
DWG NO CSHF8212S.iam	REV
SHEET 2 OF 3	

B

B



A

A

Step One: Place base on floor with finished edge facing out and groove for optional back facing up.

Step Two: Attach left hand end panel to base. Align grooves for back panel with grooved rail on base. Secure with hand tightened 1-3/4" hex bolt and washer through each hole in the base into the threaded insert in the end panel.

Step Three: Minifix the center rail to the left end panel at the groove for the back panel. Insert the bottom back panel before setting the rail.

Step Four: Attach right end panel to the base using 1 3/4" hex bolts.


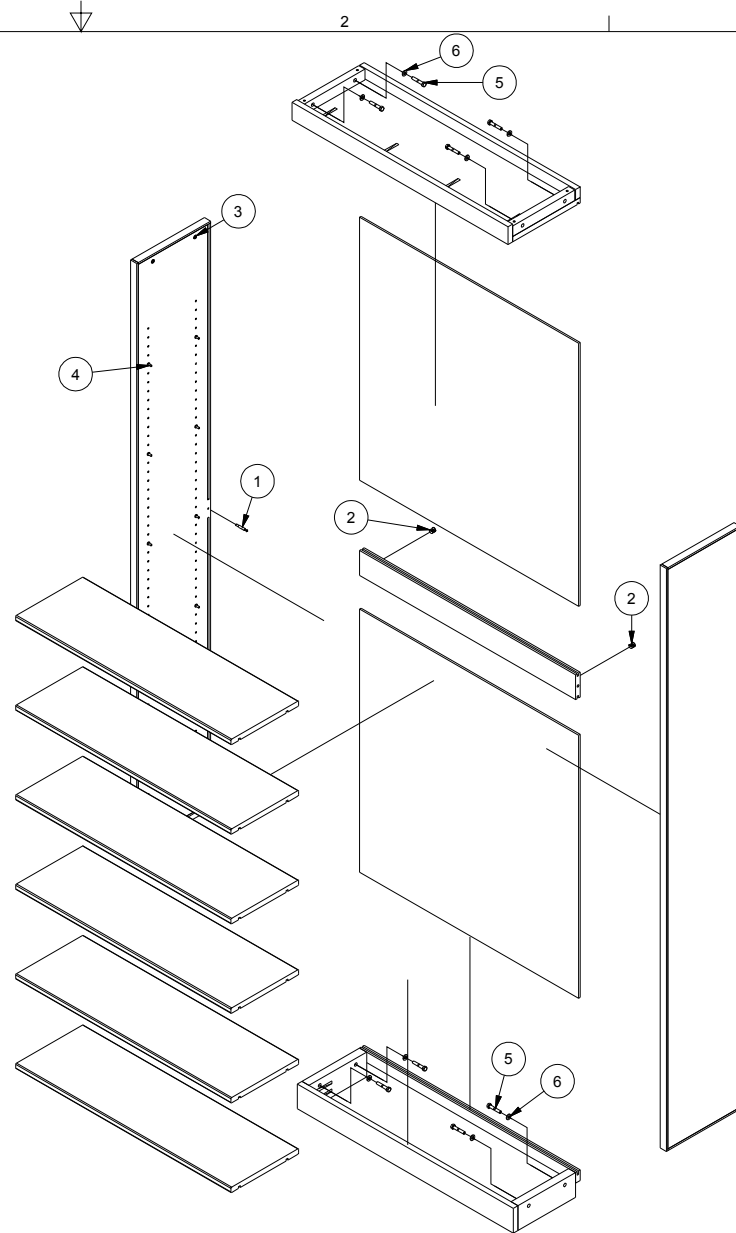
Step Five: Slide in the top half of the back.

Step Six: Place shelving soffit between the left and right hand end panels aligning the side holes in the soffit with those in the end panels. Secure with hand tightened 1-3/4" hex bolt and washer through each hole in the soffit into the threaded insert in the end panel. Note 72 and 82h units have inverted soffit.

Step Seven: Tighten all hex bolts with socket or wrench. Adjust base, top and end panels to straighten the units.

Step Eight: OXFORD SHELVING ONLY: Place base shelf with counter sunk holes facing up on the base frame. Use the two 1-1/2" screws in each hole to secure the base shelf to the frame.

Step Nine: Set each adjustable shelf with four shelf pins in notches on the shelves.



ORDER NO:	
DEALER	
PROJECT 72 & 82 SF SHELVING	
SIZE B	SCALE
DRAWN DG	DATE 5/1/2013
DWG NO CSHF8212S.iam	REV
SHEET 3 OF 3	