

IF YOUR CAMERA IS NOT SEEN BY THE RECORDER

Check the CAT 5 cable that connects the two and the connection at each end.

The camera and recorders are network devices and must be configured to 'talk' to each other. Each device must have a unique IP address and sometimes they may lose their configuration.


There is a green LED on the connector at the camera end that will flash under normal conditions indicating data is going to the recorder.

If the cable connection is good (the fan in the base and the disc on top spins is an indication the cable connection is good)

Right Click on the main preview screen and go to **MENU**


Select **CONFIGURE**

On the left side select **CAMERA**

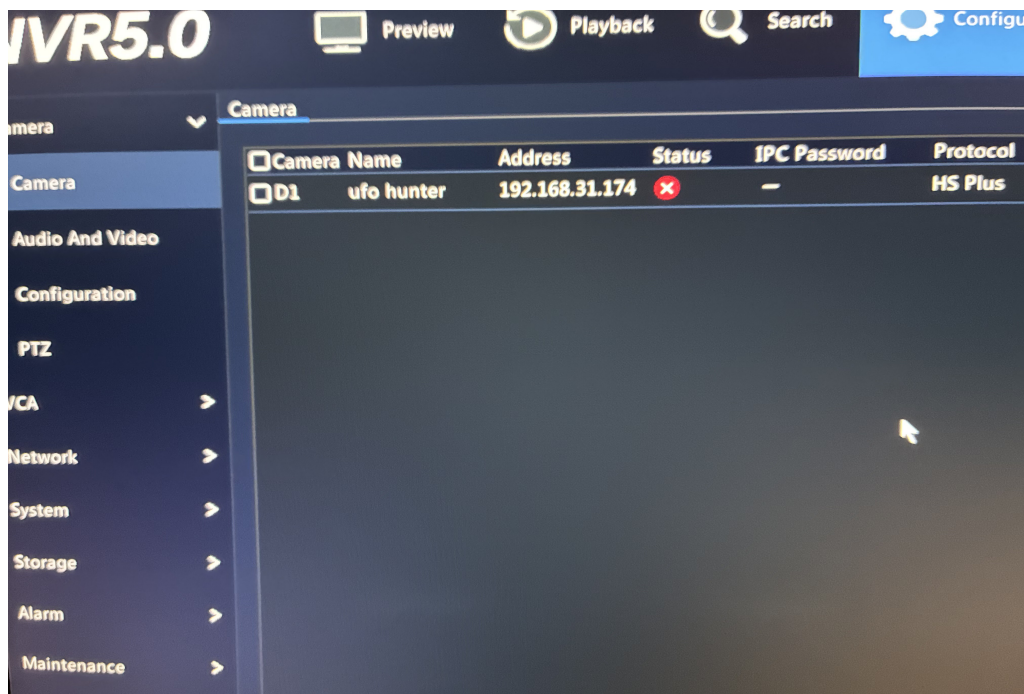


In the box the camera should be listed with a red X for the status. Click the **TRASH CAN** icon to delete that entry


ON the bottom of the screen select **CUSTOM ADD**

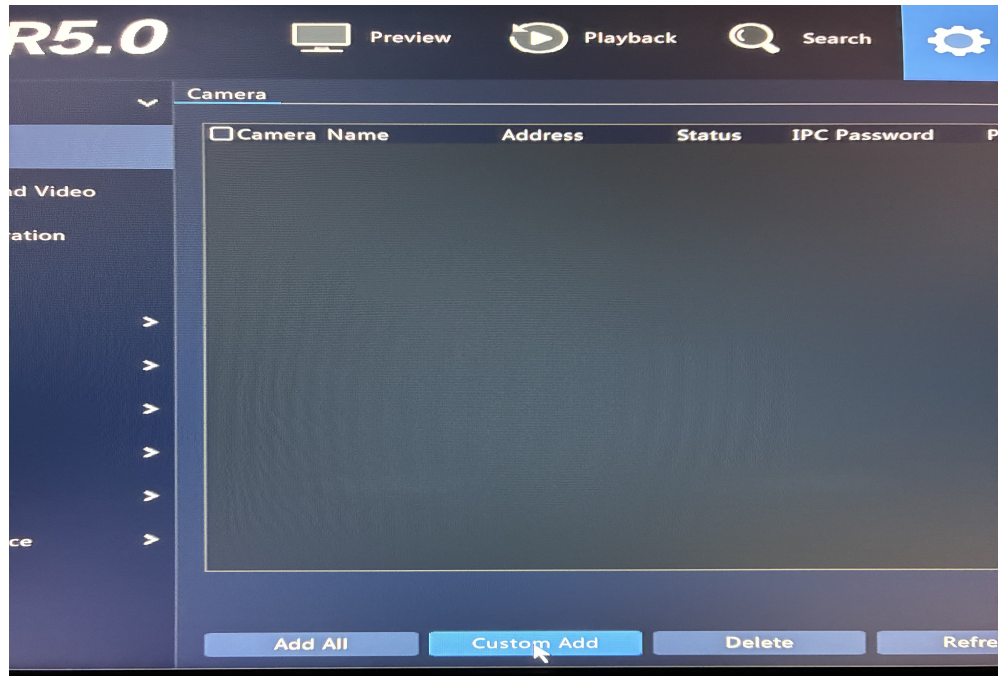

Select **SEARCH**. The IP address of the camera should populate. Click **OK**

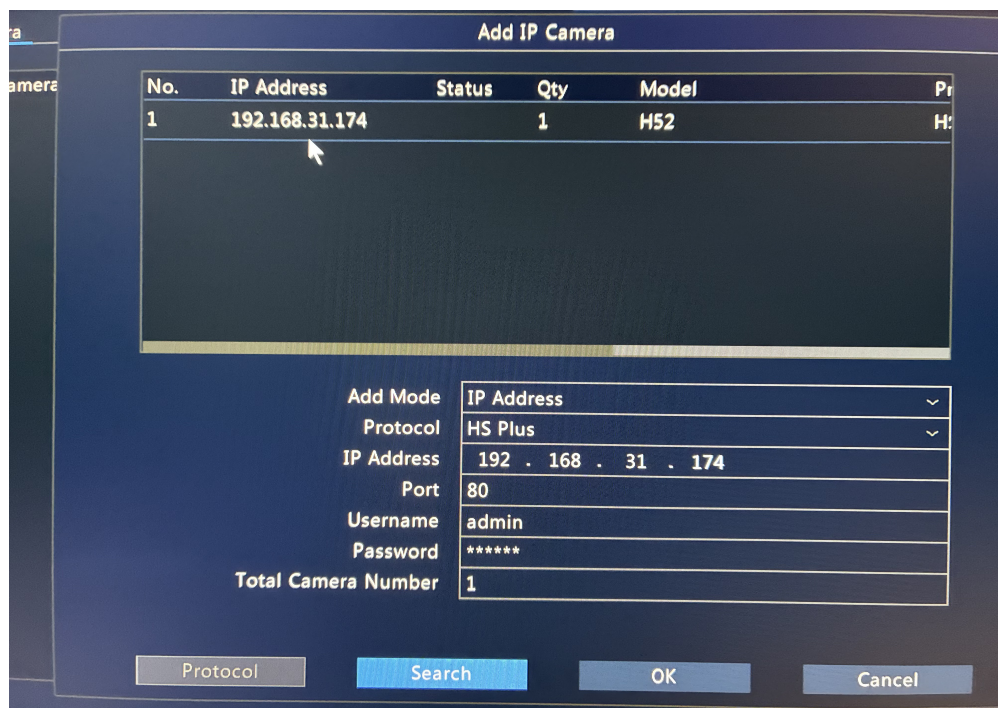

Status should be green.

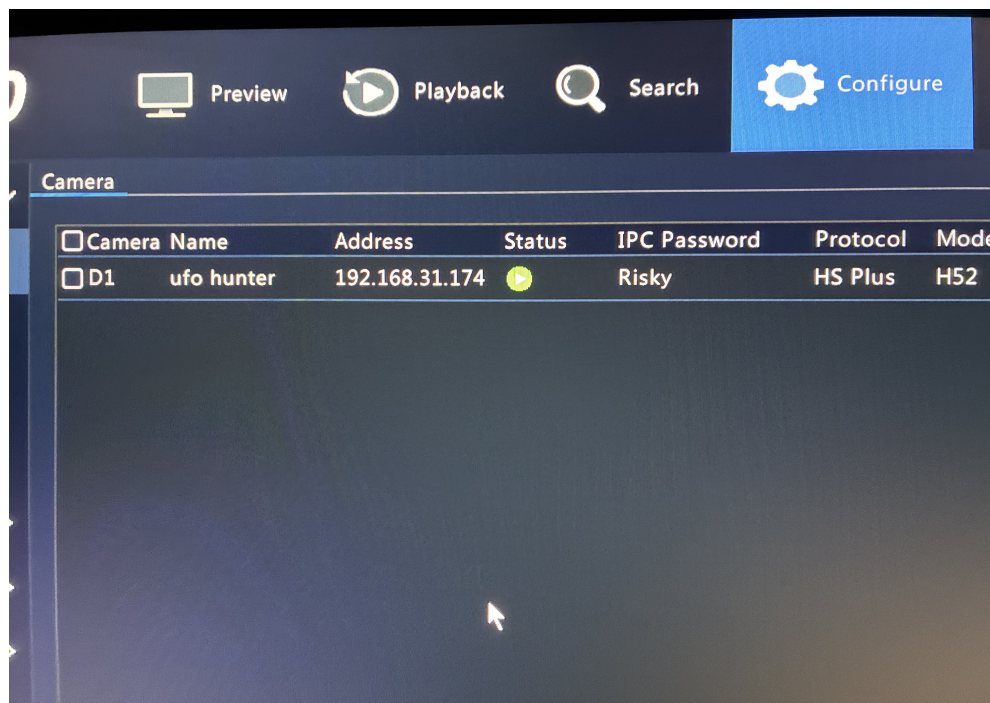

Click **EXIT** to return to preview screen