6RS-WM-600

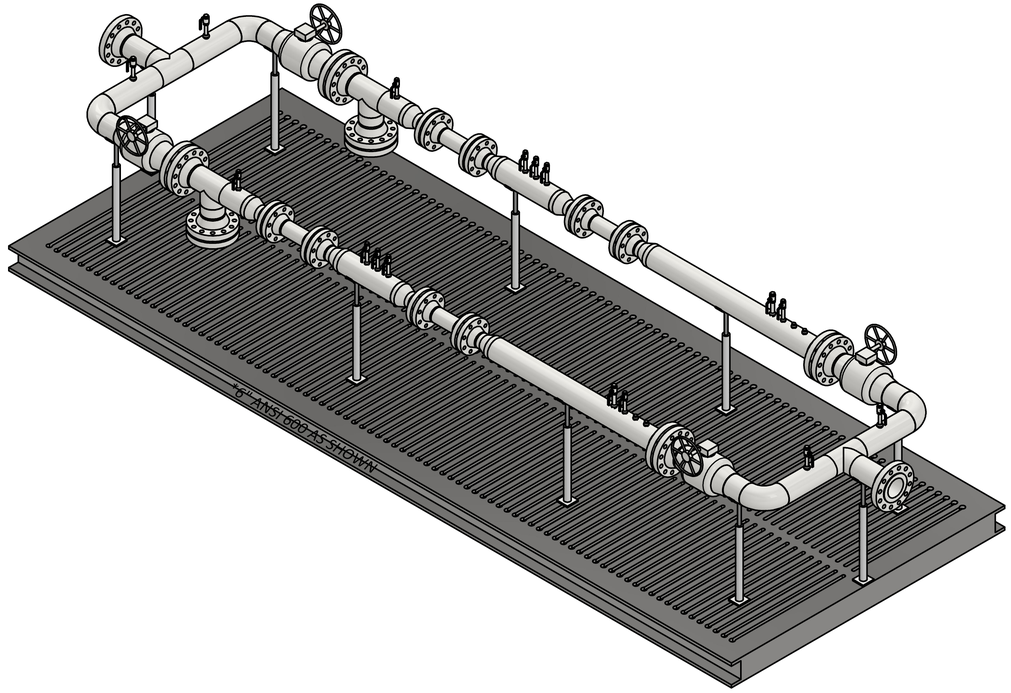

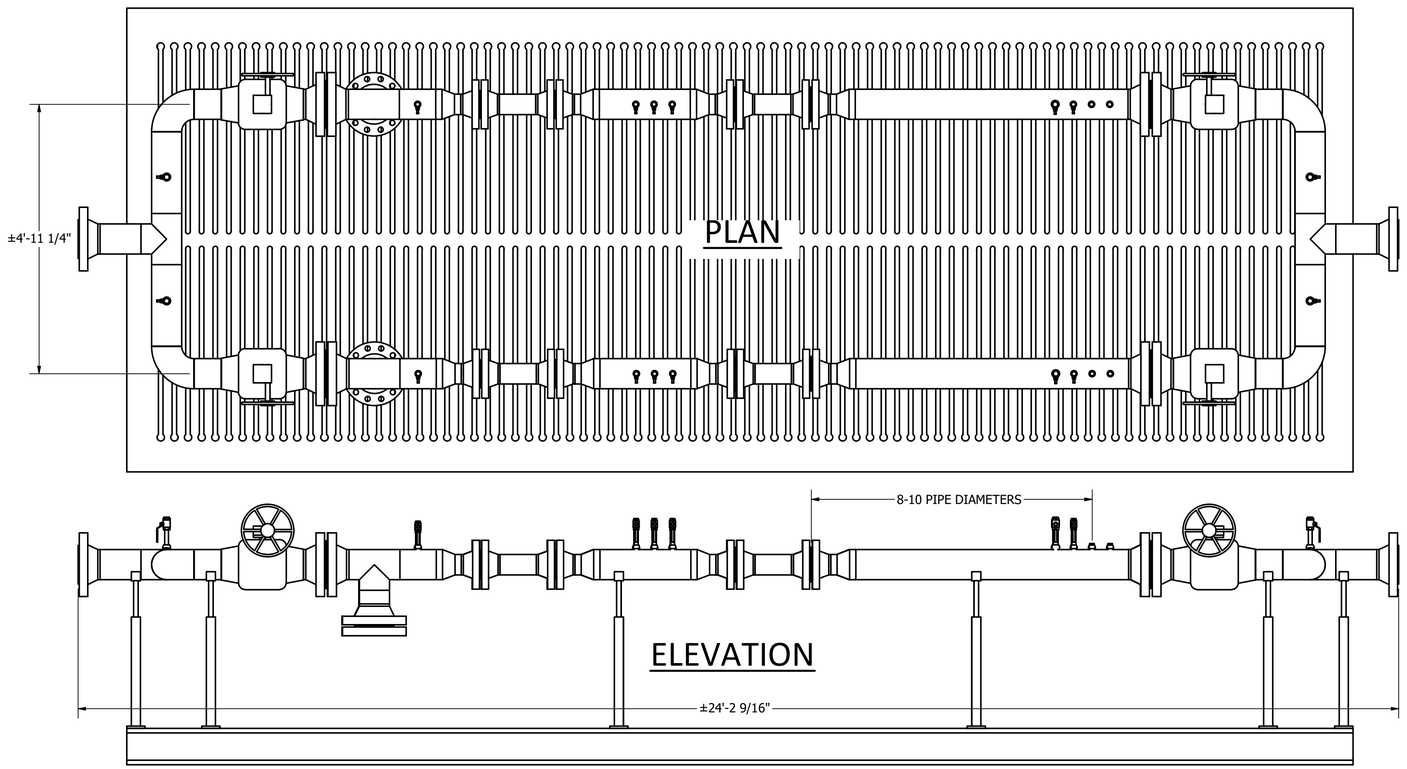

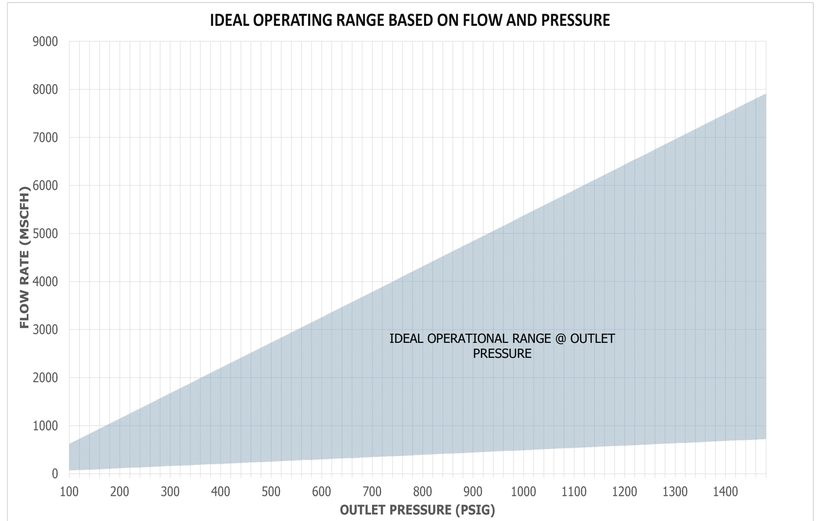

ANSI 600 STATION KEY PERFORMANCE FEATURES

- PHMSA PART 192 TRANSMISSION AT PRESSURES GREATER THAN 875 PSIG.
- ALL WELDED CONNECTIONS OUTSIDE OF DOUBLE BLOCK AN BLEED TO ELIMINATE LEAK POINTS.
- INTERCHANGEABLE SPOOLS FOR VARIOUS REGULATOR SIZES SO THE STATION CAN GROW AS DEMAND GROWS
- STANDARD 6 INCH INLET AND OUTLET HEADERS. SPOOL OPTIONS FOR 4, 3 AND 2 INCH REGULATORS (4 INCH AS SHOWN)
- ENTIRE ASSEMBLY IS PRESSURE TESTED FOR 1480 PSIG MAOP (CLASS 3)
- 100% X-RAY ON ALL WELDS
- LASER ETCHED QR CODE ON EACH ASSEMBLY FOR DIGITAL STORAGE OF ALL T.V.C DOCUMENTATION

KEY PARTS

- *CAMERON VALVES
- *KECKLY STRAINERS
- *WOOSTER/QUADRANT VALVES
- *REGULATORS CAN BE PROVIDED UPON REQUEST
- XYLAN COATED NUTS AND BOLTS
- DELIVERED WITH ISW VERSASKID™ AND VERSASKID™ PIPE SUPPORTS FOR EASY FIELD ADJUSTMENTS
- ALL PIPE AND FITTINGS ARE MADE IN THE USA

**ALTERNATES AVAILABLE UPON REQUEST*

OPTIONAL ITEMS AVAILABLE UPON REQUEST:

- REGULATORS SIZING/PRESSURE CONTROL SELECTION
- INSULATING KITS (WELD/FLANGE)
- WELD END CONNECTIONS RATHER THAN FLANGE FOR ASSEMBLY TIE-IN
- PRESSURE SENSORS AND GAUGES
- SKIDS CAN BE DELIVERED WITH SENSOR CONDUIT AND WIRING PREINSTALLED AND TERMINATED AT A JUNCTION BOX FOR EASY CONNECTION IN FIELD.
- AVAILABLE IN WORKING/MONITOR CONFIGURATION

DESIGN DISCLAIMER:

STATIONS ARE DESIGNED TO MEET MINIMUM SAFETY REQUIREMENTS OUTLINED IN C.F.R. 49 PART 192. ADDITIONAL DESIGN REQUIREMENTS MAY BE NEEDED BASED ON THE STATIONS INSTALLATION LOCATION. STATION OWNERS SHOULD CONSULT WITH COMPETENT PERSONS TO ENSURE FINAL DESIGN IS COMPLIANT WITH ALL LOCAL, STATE, AND FEDERAL REQUIREMENTS.

ISW
INNOVATIVE STEEL WORKS & FABRICATION LLC
CONTACT US!
PHONE: 615-274-6701
10148 Hwy 99
PO Box 425
Rockvale, TN 37153

6RS-WM-600
VERSA STATION 6" STANDARD
ANSI 600 REGULATOR STATION

CONCEPTUAL - NOT FOR CONSTRUCTION