


Switch Actuator

4/8/12 Channel 20A Switch Actuator



PC-MR4812.4.20.2

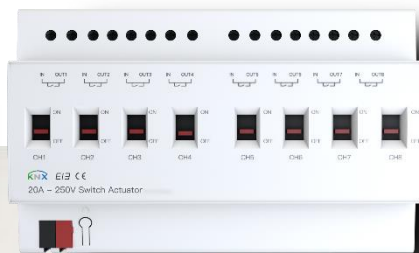

PC MR4812.8.20.2



PC MR4812.12.20.2

- Relay with manual forced cut dial
- Relay has a magnetic hold function
- 4/8/12 channel 20A switch actuator has an I/O dry contact input interface, which can input control commands such as switches, curtains, dimming, scenes and fire protection.

| | |
|---------------|---|
| Bus Voltage : | 21 – 30V DC |
| Bus Current : | ≤12mA |
| Bus Power : | ≤ 360mW |
| Size : | 108mm x 90mm x 64mm (4 channel actuator) |
| Size : | 217mm x 90mm x 64mm (8/12 channel actuator) |