



# MW SERIES

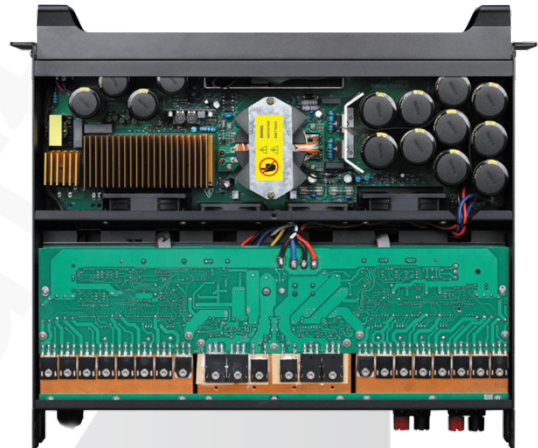

MW-2800 | MW-21000 | MW-21350 | MW-21500 | MW-21800

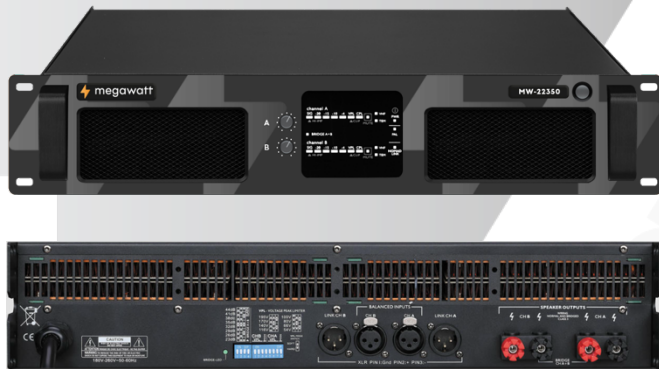

| Specification             | MW-2800                             | MW-21000 | MW-21350 | MW-21500 | MW-21800 |
|---------------------------|-------------------------------------|----------|----------|----------|----------|
| 8Ω Stereo Output Power    | 800W                                | 1000W    | 1350W    | 1500W    | 1800W    |
| 4Ω Stereo Output Power    | 1600W                               | 1800W    | 2100W    | 2540W    | 3100W    |
| 2Ω Stereo Output Power    | 2000W                               | 2300W    | 2500W    | 2800W    | 4600W    |
| 8Ω Bridge Output Power    | 3200W                               | 3500W    | 4200W    | 5080W    | 6200W    |
| 4Ω Bridge Output Power    | 4000W                               | 4500W    | 5000W    | 5530W    | 9200W    |
| Output Circuit            | TD                                  |          |          |          |          |
| Height                    | 2U                                  |          |          |          |          |
| Frequency Response        | 6.8Hz – 34kHz                       |          |          |          |          |
| THD (20Hz – 20kHz for 1W) | <0.1%                               |          |          |          |          |
| THD at 1kHz               | <0.05%                              |          |          |          |          |
| Signal-to-Noise Ratio     | >112dBA                             |          |          |          |          |
| Damping Factor            | ≥2000                               |          |          |          |          |
| Crosstalk                 | >70dB                               |          |          |          |          |
| Gain Options              | 23, 26, 29, 32, 35, 38, 41, 44dB    |          |          |          |          |
| Input Impedance           | 20KΩ (Balanced) / 10KΩ (Unbalanced) |          |          |          |          |
| Input Connector           | 3-pin XLR, electronically balanced  |          |          |          |          |
| Output Connector          | Speakon Connectors (NEUTRIK)        |          |          |          |          |