

# 10 Station Playcourt - Station List

Station #	Name	Icon	Boards	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Straight Away		1	Kite	1	12' 8"	152	120	32	96"
2	Either		1	3-Panel	2	12' 8"	152	120	32	96"
3	Bank Down		1	Fan Forward	1	11' 4"	136	104	32	96"
4	Wrap Around - Left		1	Large Curve	2	12' 8"	152	120	32	96"
5	Wrap Around - Right		1	Large Curve	2	12' 8"	152	120	32	96"
6	Chute		1	Rectangle	1	11' 4"	136	104	32	N/A
			1	Square	1	10' 6"	126	94	32	84"
7	Any		1	Half-Round	1	12' 8"	152	120	32	96"
8	Double Roll Back		1	Fan Back	1	11' 4"	136	104	32	96"
			1	Square Slide-Down						60"
9	Slant Back - Left		1	Kite	1	12' 8"	152	120	32	N/A
			1	Square	1	7' 7"	91	71	20	60"
10	Black Hole		1	Kite	1	12' 8"	152	120	32	N/A
			1	Kite	1	12' 8"	152	120	32	N/A
			1	Square	1	7' 7"	91	71	20	60"



# 10 Station Playcourt - Parts List

<i>Board Shape(s)</i>	<i>Board Qty.</i>
3-Panel	1
Fan Back	1
Fan Forward	1
Half-Round	1
Kite	4
Large Curve	2
Rectangle	1
Square	3
Square Slide-Down	1
<b>Grand Total</b>	<b>15</b>

<i>Pole Size (Ft/in)</i>	<i>Pole Qty.</i>
10' 6"	1
11' 4"	3
12' 8"	11
7' 7"	2
<b>Grand Total</b>	<b>17</b>

2 inch round galvanized pipe, Schedule 80 ( 2.375 OD X 0.154 Wall)


**Note:** This is our standard station selection sequence for this layout.  
Colors and sequence may vary, and can be tailored to your specific location and community.


<i>Also Included</i>	<i>Qty</i>
Rims	11
Set Screws	36
Pole Caps	17

**Note:** This is our standard station selection sequence for this layout.  
Colors and sequence may vary, and can be tailored to your specific location and community.



10 Station Round Pole Installation Pages

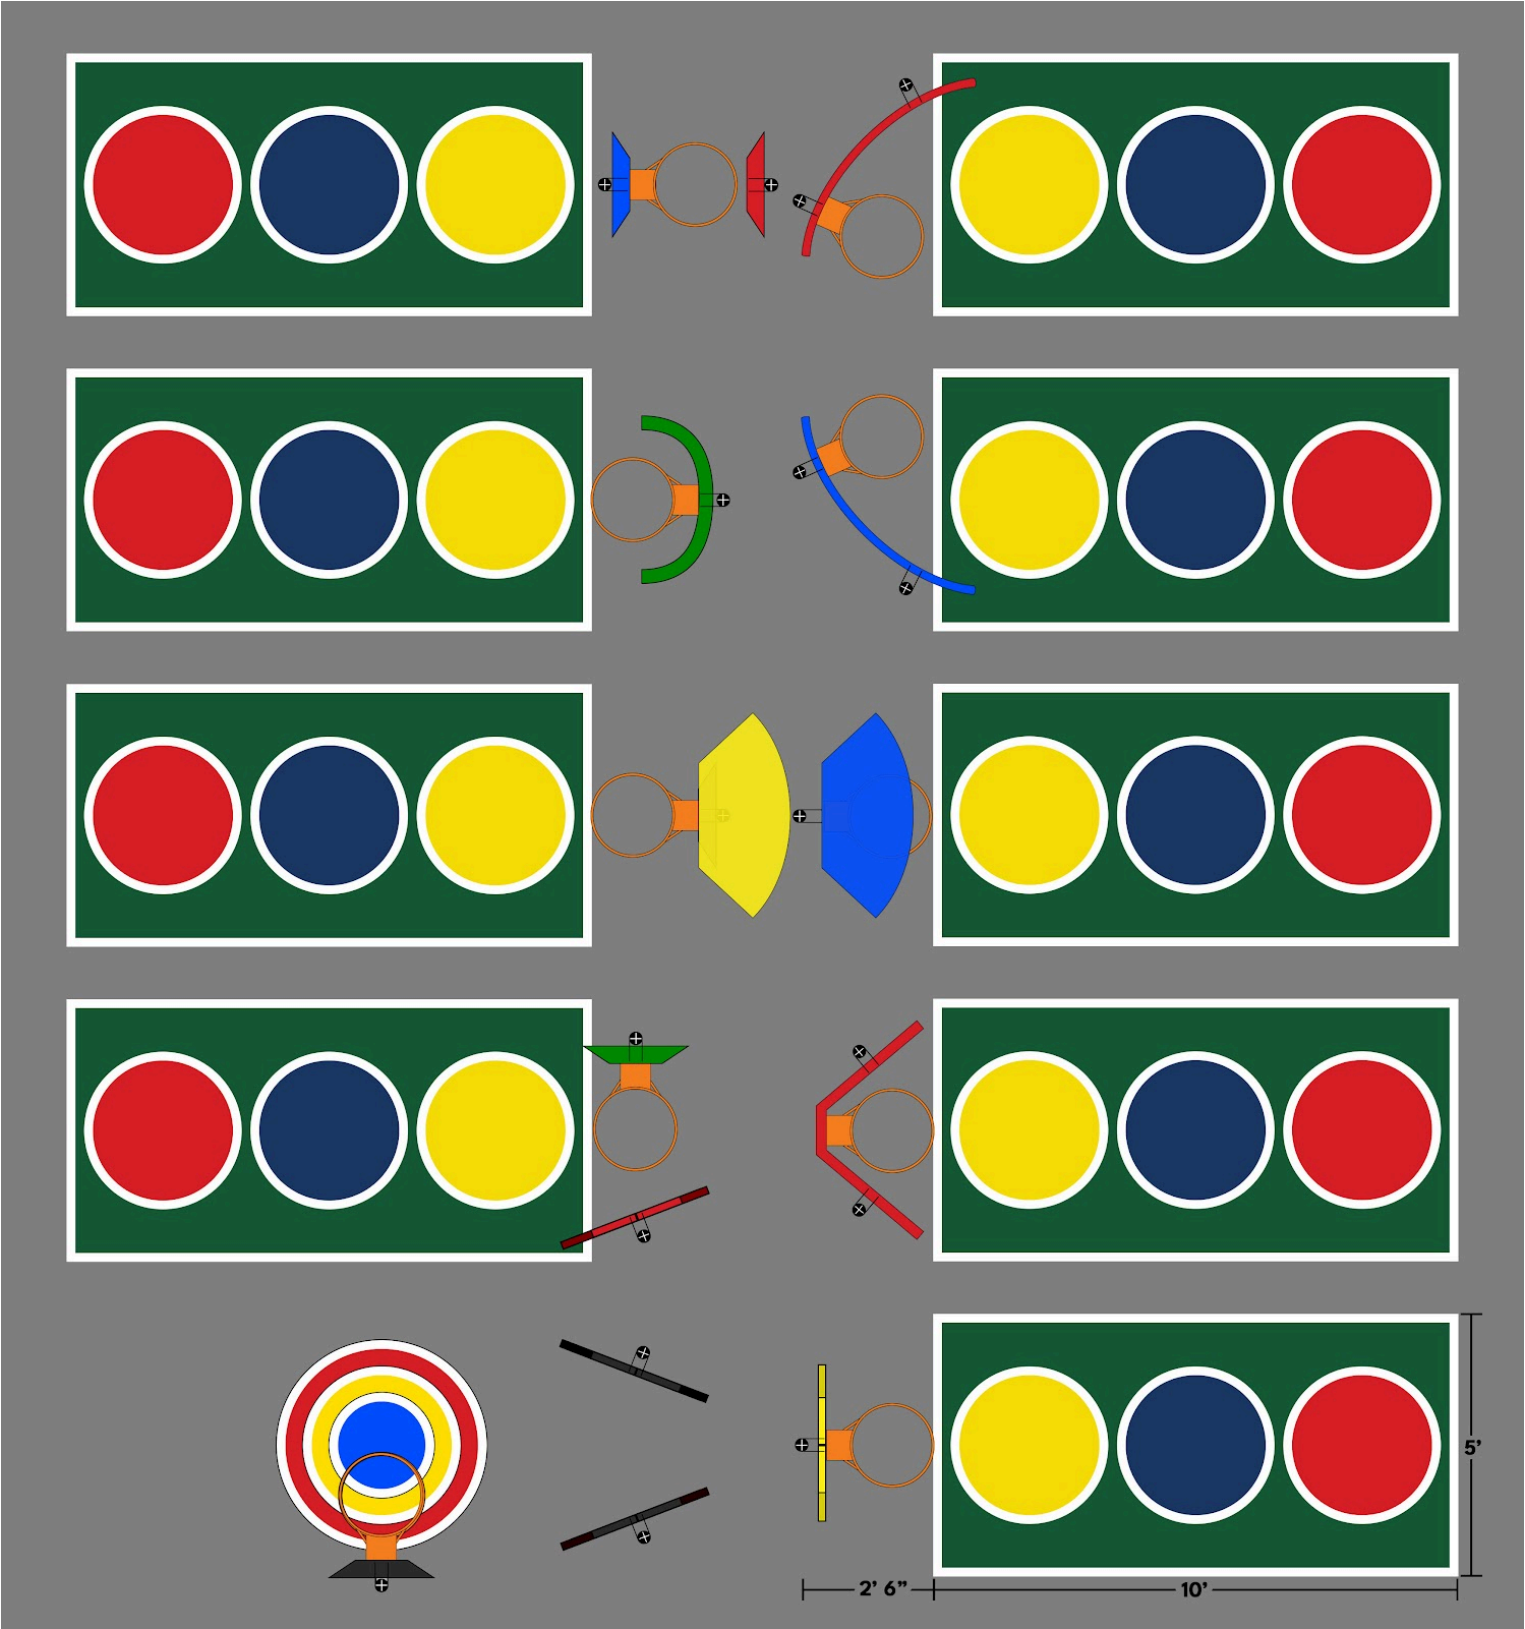



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Straight Away		Kite	1	12' 8"	152	120	32	96"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

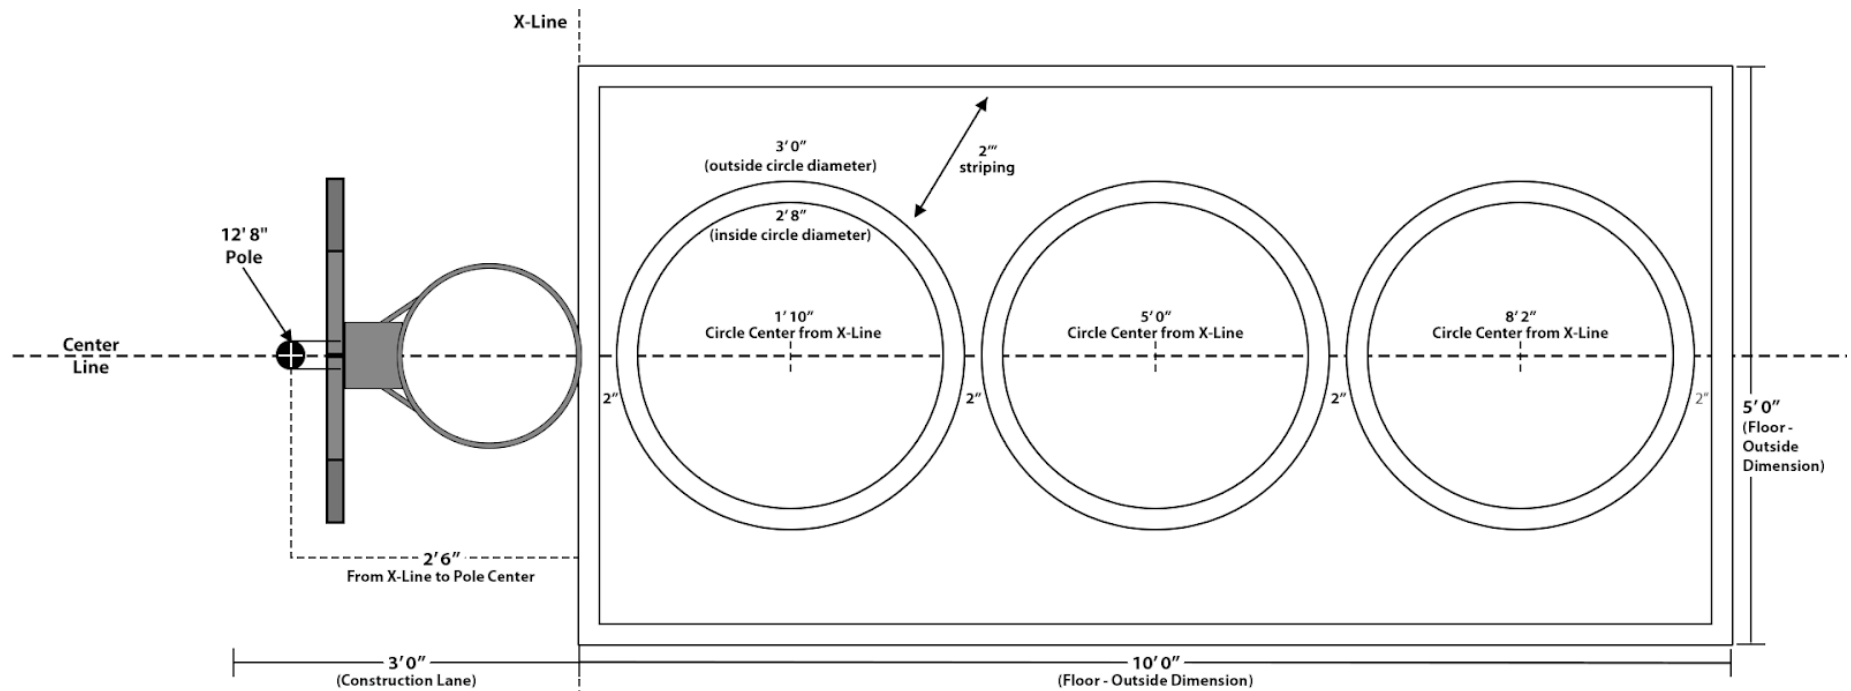



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
2	Either		3-Panel	2	12' 8"	152	120	32	96"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

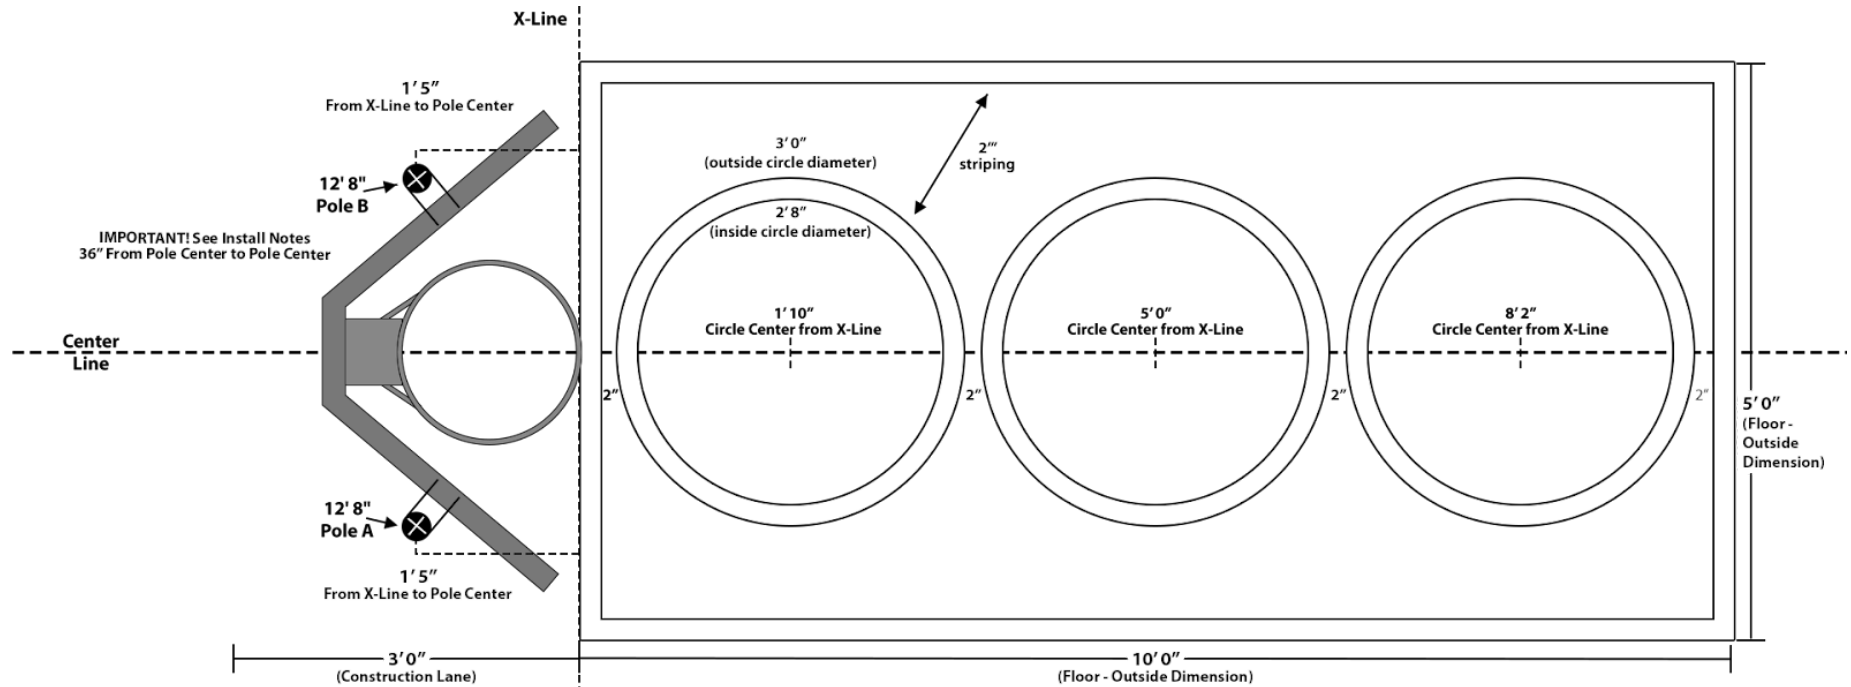



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
3	Bank Down		1	Fan Forward	11' 4"	136	104	32	96"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

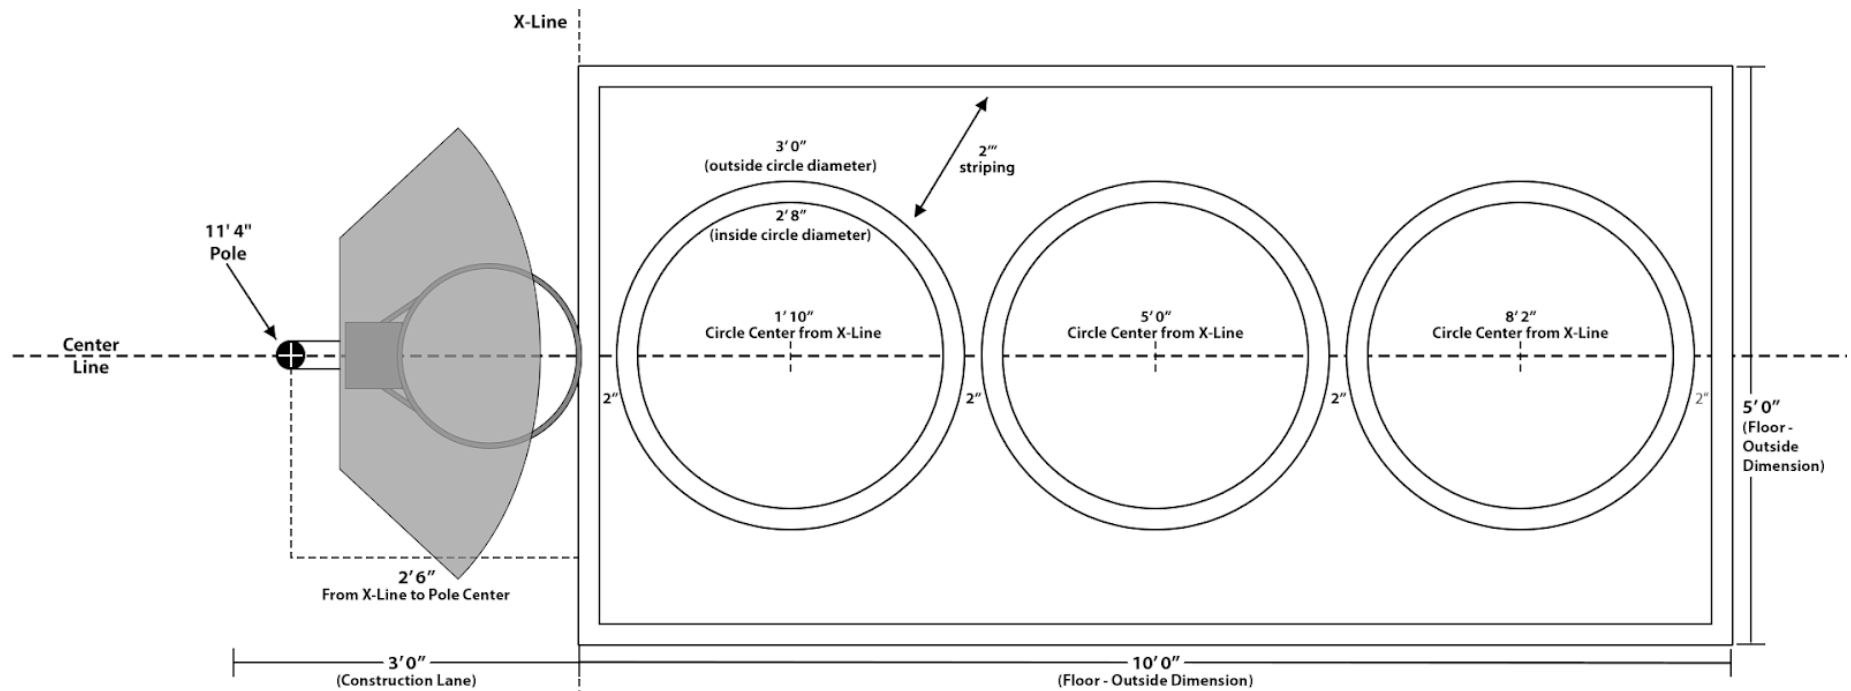



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
4	Wrap Around - Left		Large Curve	2	12' 8"	152	120	32	96"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- Pole B should be roughly 6" from X-Line.

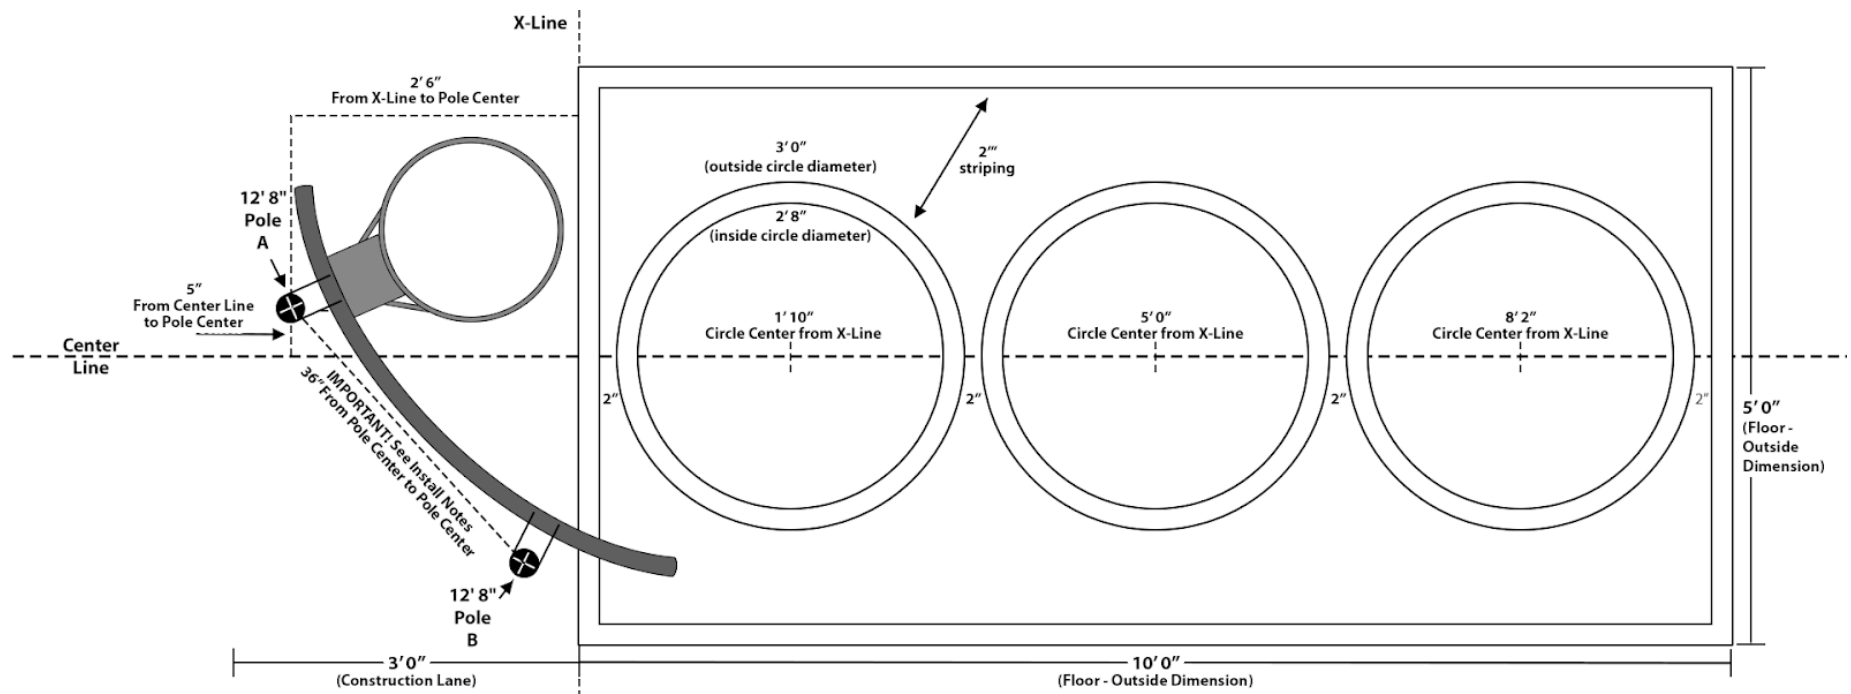


Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
5	Wrap Around - Right		Large Curve	2	12' 8"	152	120	32	96"

### Installation Notes


**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- Pole B should be roughly 6" from X-Line.

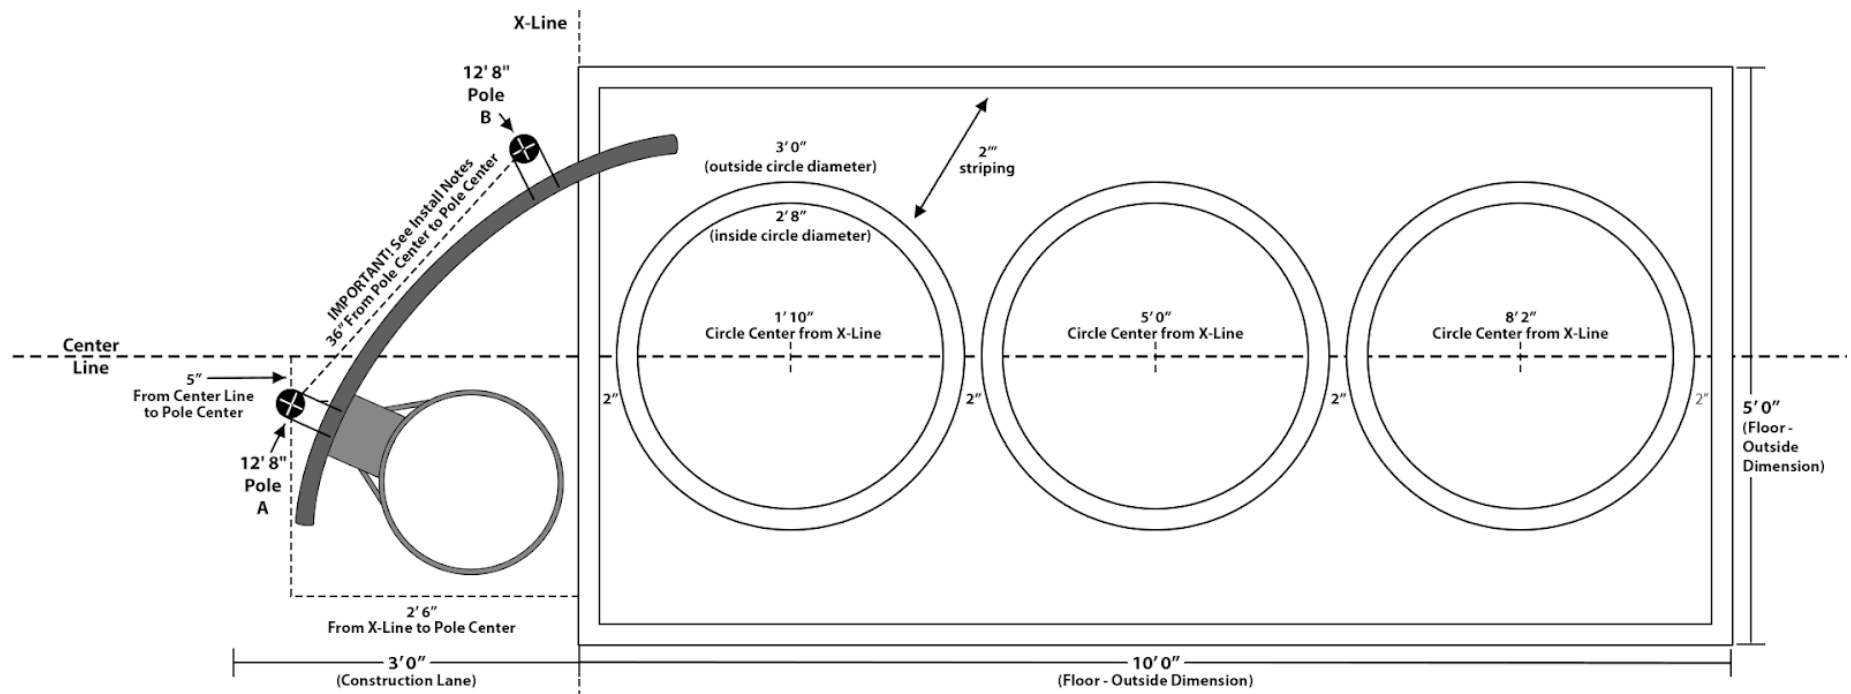







Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
7	Any		Half-Round	1	12' 8"	152	120	32	96"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

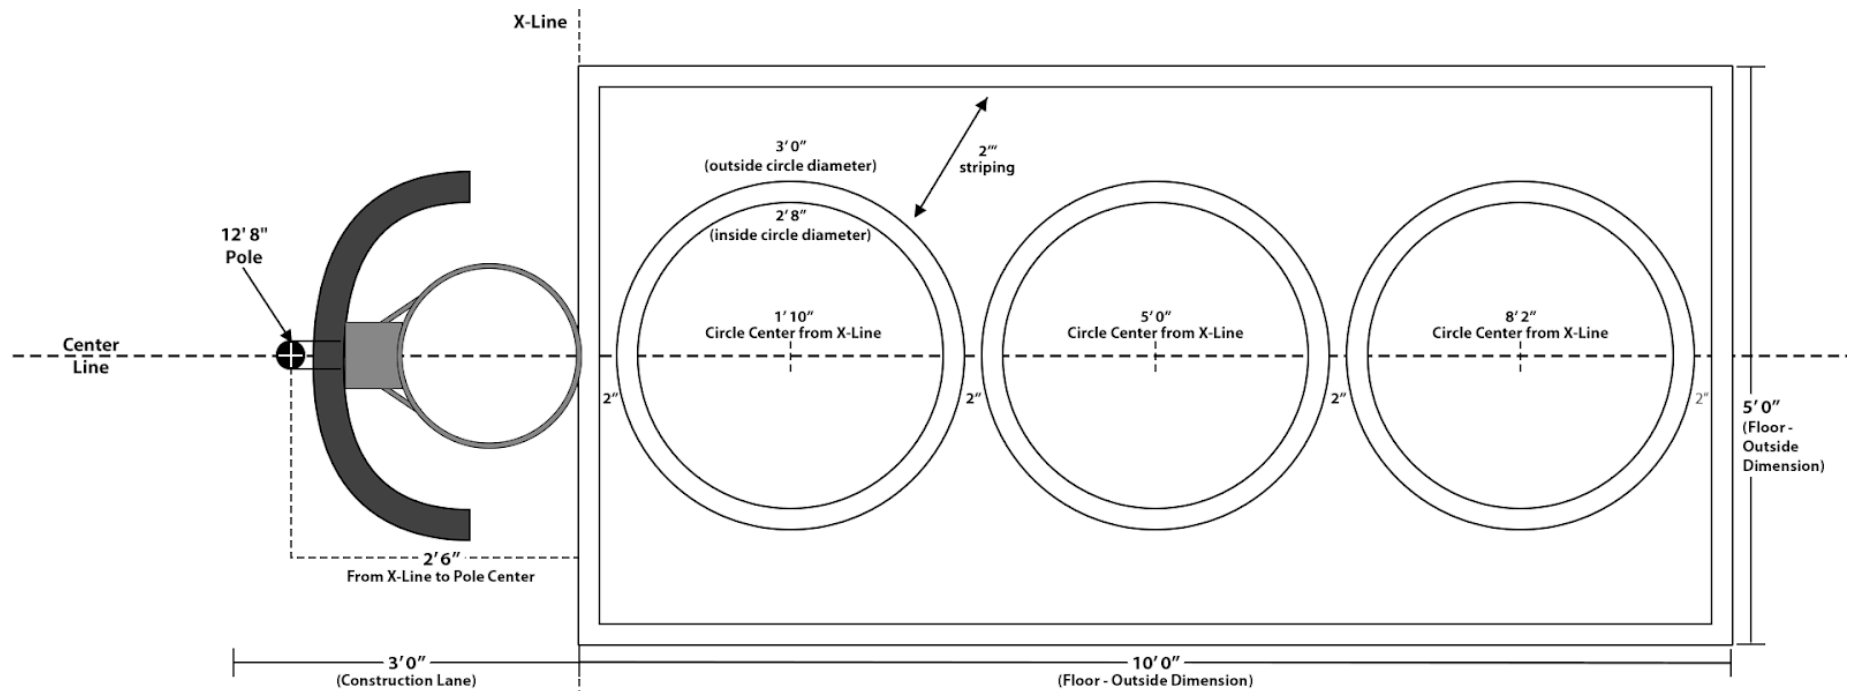


Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
8	Double Roll Back		Fan Back	1	11' 4"	136	104	32	96"
			Square Slide-Down						60"


### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Mount Square Board on pole first, Rim should be 5 feet (60 inches) above surface.

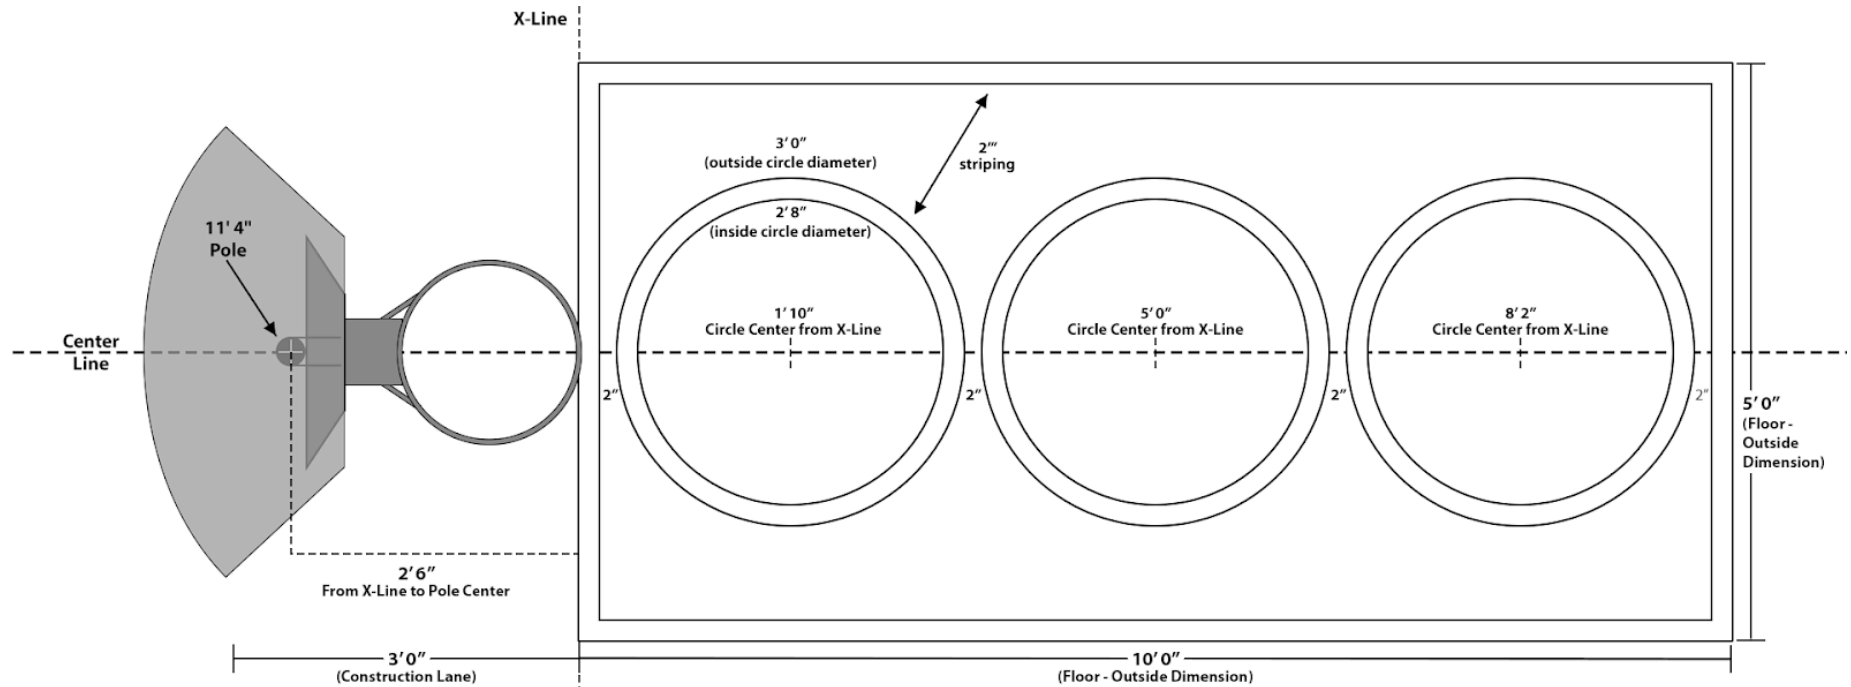



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
10	Black Hole		Kite	1	12' 8"	152	120	32	N/A
			Kite	1	12' 8"	152	120	32	N/A
			Square	1	7' 7"	91	71	20	60"

### Installation Notes

#### IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center A to Pole Center B should be 42". Pole Center A to Pole Center C should be 61". Pole Center B to Pole Center C should be 80"
- It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

