# 16 Station Playcourt - Station List

Station #	Name	lcon	Boards	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Straight Away		1	Kite	1	12' 8"	152	120	32	96"
2	Any		1	Half-Round	1	12' 8"	152	120	32	96"
3	Either		1	3-Panel	2	12' 8"	152	120	32	96"
_	Double		1	Fan Forward	1	11' 4"	136	104	32	96"
4	Bank Down		1	Square						60"
5	Wrap Around - Left		1	Large Curve	2	12' 8"	152	120	32	96"
6	Wrap Around - Right		1	Large Curve	2	12' 8"	152	120	32	96"
7	Bank Back		1	Rectangle	1	11' 4"	136	104	32	N/A
Ĭ	- Left		1	Square	1	10' 6"	126	94	32	84"
8	Bank Back		1	Rectangle	1	11' 4"	136	104	32	N/A
0	- Right		1	Square	1	10' 6"	126	94	32	84"
9	Ricochet Small - Right		1	Flap Upper Right	2	12' 8"	152	120	32	96"
10	Ricochet Large - Left		1	Flap Upper Left	2	12' 8"	152	120	32	96"
11	Carom - Left		1	Вох	2	12' 8"	152	120	32	96"
12	Carom - Right		1	Вох	2	12' 8"	152	120	32	96"
13	Roll Back		1	Fan Back	1	11' 4"	136	104	32	96"
44	Objects		1	Rectangle	1	11' 4"	136	104	32	N/A
14	Chute		1	Square	1	10' 6"	126	94	32	84"
	Clant Dask		1	Kite	1	12' 8"	152	120	32	N/A
15	Slant Back - Left		1	Square	1	7' 7"	91	71	20	60"
			1	Kite	1	12' 8"	152	120	32	N/A
16	Black Hole	<b>V V</b>	1	Kite	1	12' 8"	152	120	32	N/A
			1	Square	1	7' 7"	91	71	20	60"

# 16 Station Playcourt - Parts List

Board Shape(s)	Board Qty.
3-Panel	1
Box	2
Fan Back	1
Fan Forward	1
Flap Upper Left	1
Flap Upper Right	1
Half-Round	1
Kite	4
Large Curve	2
Rectangle	3
Square	6
Grand Total	23


Pole Size (Ft/in)	Pole Qty.
10' 6"	3
11' 4"	5
12' 8"	19
7' 7"	2
Grand Total	29

2 inch round galvanized pipe, Schedule 80 (2.375 OD X 0.154 Wall)

Also Included	Qty
Rims	17
Set Screws	58
Pole Caps	29

<u>Note:</u> This is our standard station selection sequence for this layout. Colors and sequence may vary, and can be tailored to your specific location and community.




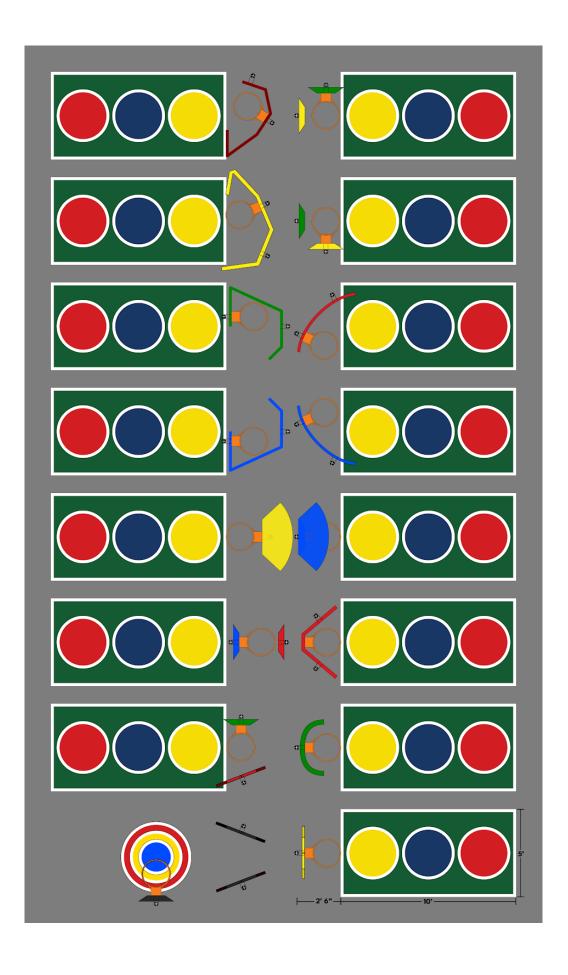

Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Straight Away		Kite	1	12' 8"	152	120	32	96"

#### IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.


- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

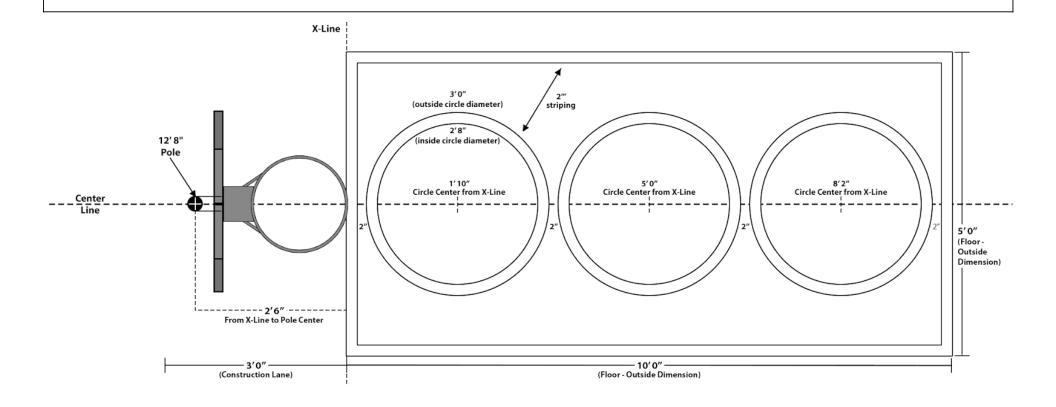

Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
2	Any		Half-Round	1	12' 8"	152	120	32	96"


#### IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

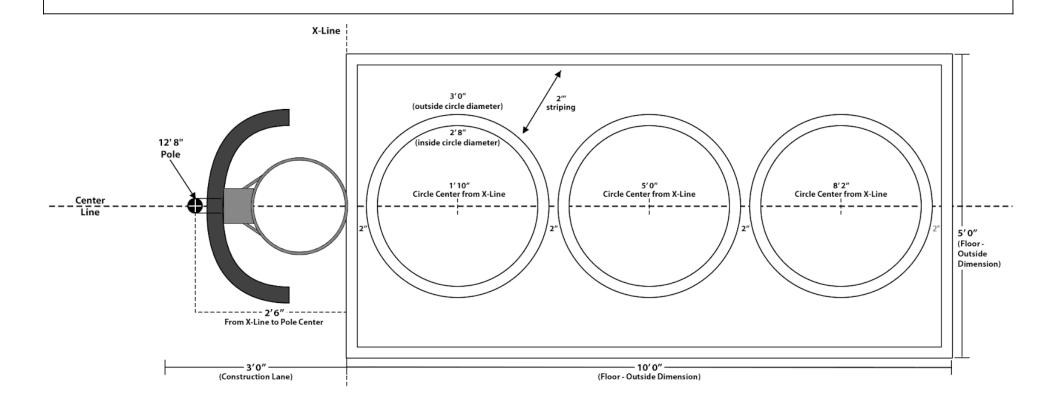


	Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
_	3	Either		3-Panel	2	12' 8"	152	120	32	96"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

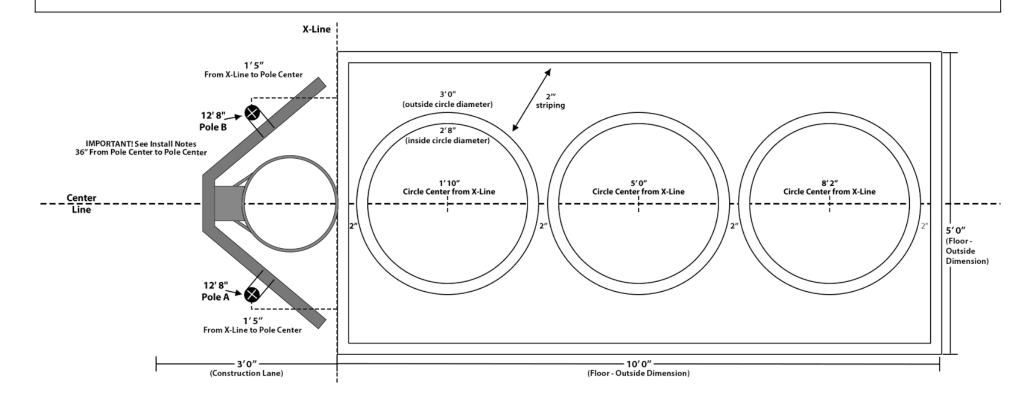


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
Λ	Double Bank		Fan Forward	1	11' 4"	136	104	32	96"
	Down		Square						60"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Mount Square Board on pole first, Rim should be 5 feet (60 inches) above surface.

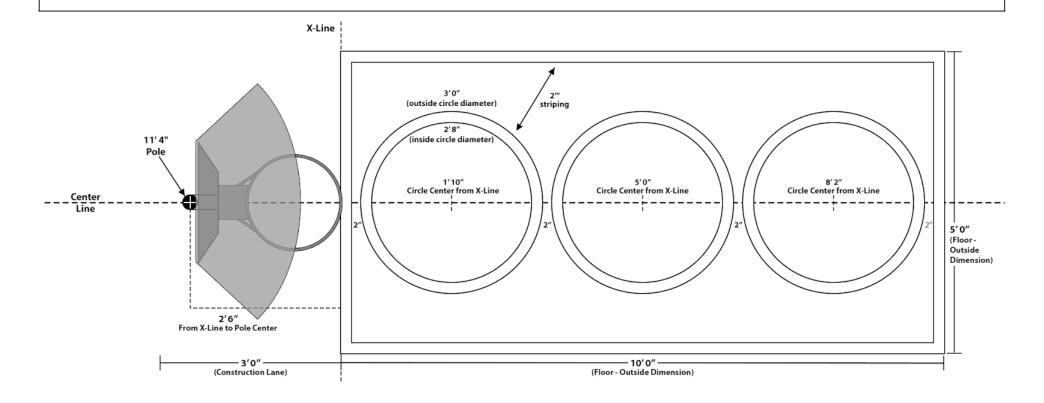


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
5	Wrap Around - Left		Large Curve	2	12' 8"	152	120	32	96"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- Pole B should be roughly 6" from X-Line.

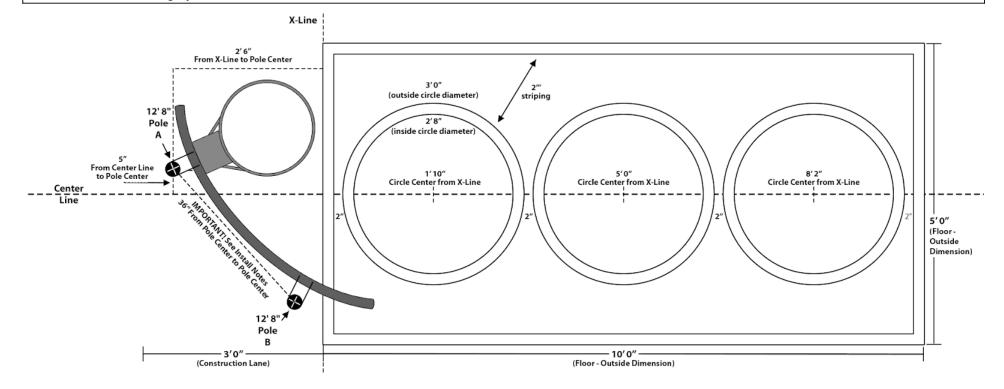


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
6	Wrap Around - Right		Large Curve	2	12' 8"	152	120	32	96"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- Pole B should be roughly 6" from X-Line.

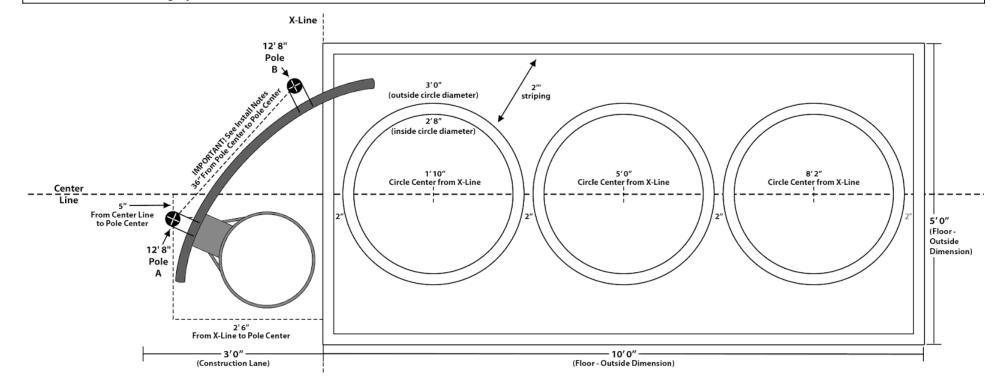


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
7	Bank Back - Left		Rectangle	1	11' 4"	136	104	32	N/A
	Baill Back - Left		Square	1	10' 6"	126	94	32	84"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 29". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 5" gap from the face of the rectangle board to the front edge of the rim.

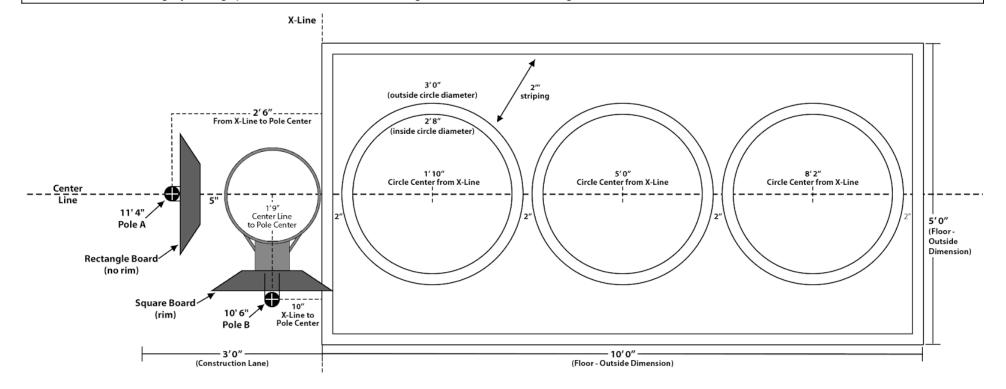


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
	Bank Back - Right		Rectangle	1	11' 4"	136	104	32	N/A
	Bank Back - Right		Square	1	10' 6"	126	94	32	84"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 29". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 5" gap from the face of the rectangle board to the front edge of the rim.

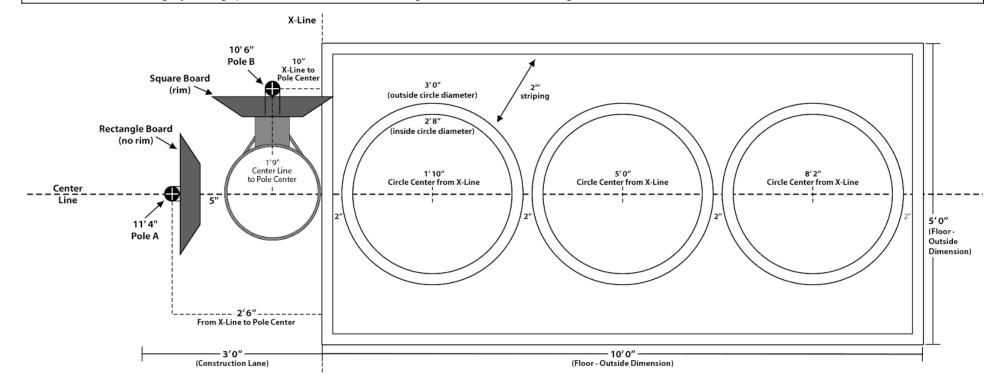


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
9	Ricochet Small - Right		Flap Upper Right	2	12' 8"	152	120	32	96"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 32". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

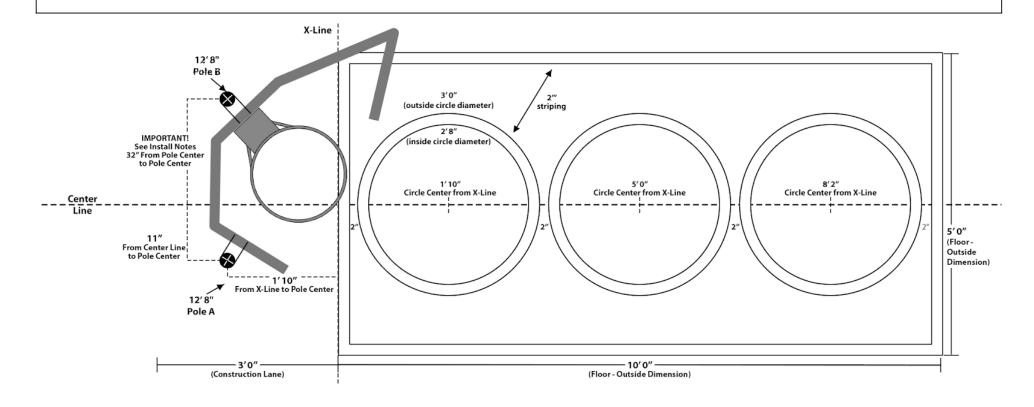


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
10	Ricochet Large - Left		Flap Upper Left	2	12' 8"	152	120	32	96"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

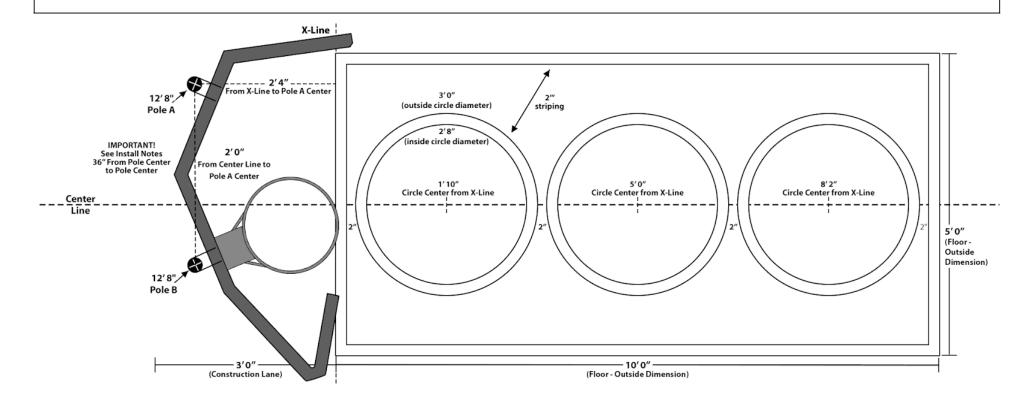


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
11	Carom - Left		Вох	2	12' 8"	152	120	32	96"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 44". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

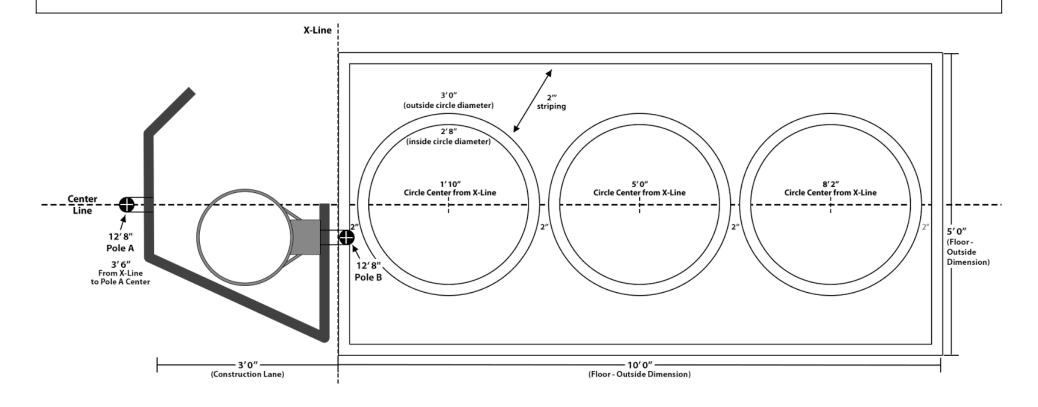

Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
12	Carom - Right		Вох	2	12' 8"	152	120	32	96"


- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 44". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

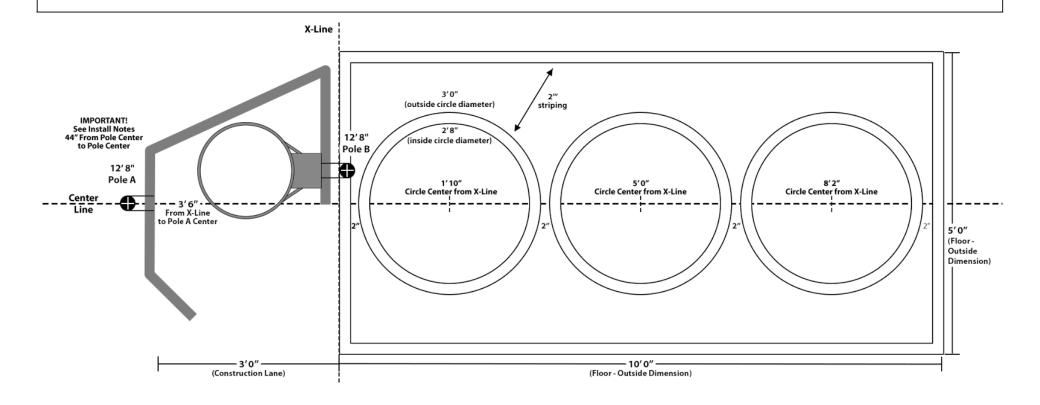

Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
13	Roll Back		Fan Back	1	11' 4"	136	104	32	96"


#### IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

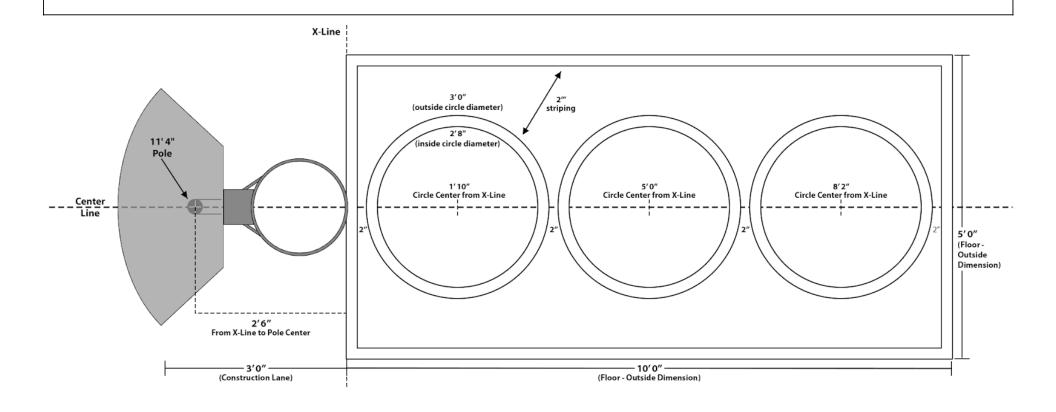


Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
14	Chute		Rectangle	1	11' 4"	136	104	32	N/A
14	Silute		Square	1	10' 6"	126	94	32	84"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 38". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 2" gap from the face of the rectangle board to the front edge of the rim.

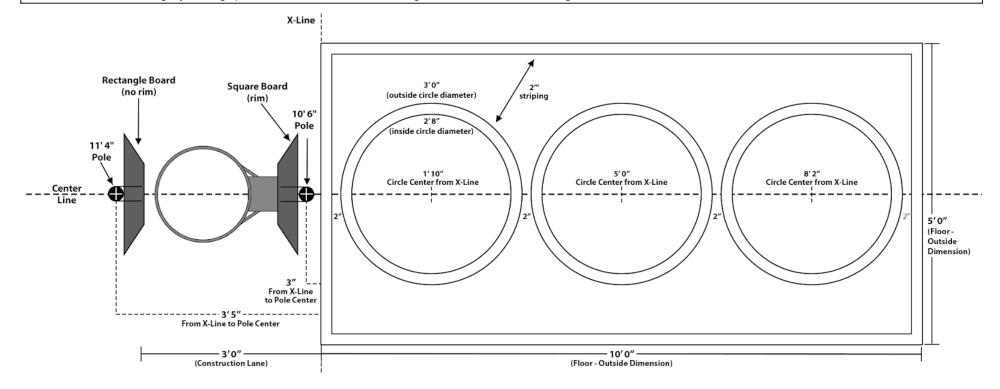

Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
15	Slant Back - Left		Kite	1	12' 8"	152	120	32	N/A
13	Glant Back - Left		Square	1	7' 7"	91	71	20	60"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 38". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 10" gap from the face of the kite board to the front edge of the rim.

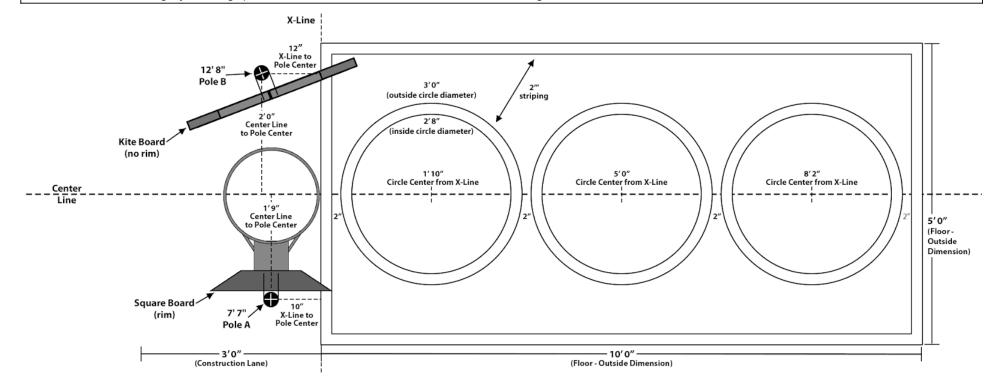

Station #	Name	lcon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
			Kite	1	12' 8"	152	120	32	N/A
16	Black Hole		Kite	1	12' 8"	152	120	32	N/A
			Square	1	7' 7"	91	71	20	60"

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center A to Pole Center B should be 42". Pole Center A to Pole Center C should be 61". Pole Center B to Pole Center C should be 80"
- It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

