

# 5 Station Playcourt - Station List

Station #	Name	Icon	Boards	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Bank Back - Left		1	Rectangle	1	11' 4"	136	104	32	N/A
			1	Square	1	10' 6"	126	94	32	84"
2	Double Bank Down		1	Fan Forward	1	11' 4"	136	104	32	96"
			1	Square						60"
3	Any		1	Half-Round	1	12' 8"	152	120	32	96"
4	Chute		1	Rectangle	1	11' 4"	136	104	32	N/A
			1	Square	1	10' 6"	126	94	32	84"
5	Black Hole		1	Kite	1	12' 8"	152	120	32	N/A
			1	Kite	1	12' 8"	152	120	32	N/A
			1	Square	1	7' 7"	91	71	20	60"

# 5 Station Playcourt - Parts List

Board Shape(s)	Board Qty.
Fan Forward	1
Half-Round	1
Kite	2
Rectangle	2
Square Slide-Down	1
Square-capped	3
<b>Grand Total</b>	<b>10</b>


Pole Size	Pole Qty.
11' 0"	2
11' 10"	1
11' 6"	1
12' 10"	4
7' 0"	1
<b>Grand Total</b>	<b>9</b>

2 inch round galvanized pipe, Schedule 80 ( 2.375 OD X 0.154 Wall)

**Note:** This is our standard station selection sequence for this layout.  
Colors and sequence may vary, and can be tailored to your specific location and community.

Also Included	Qty
Rims	6
Set Screws	20
Pole Caps	9


**Note:** This is our standard station selection sequence for this layout.  
Colors and sequence may vary, and can be tailored to your specific location and community.

Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Bank Back - Left		Rectangle	1	11' 4"	136	104	32	N/A
			Square	1	10' 6"	126	94	32	84"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 29". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 5" gap from the face of the rectangle board to the front edge of the rim.

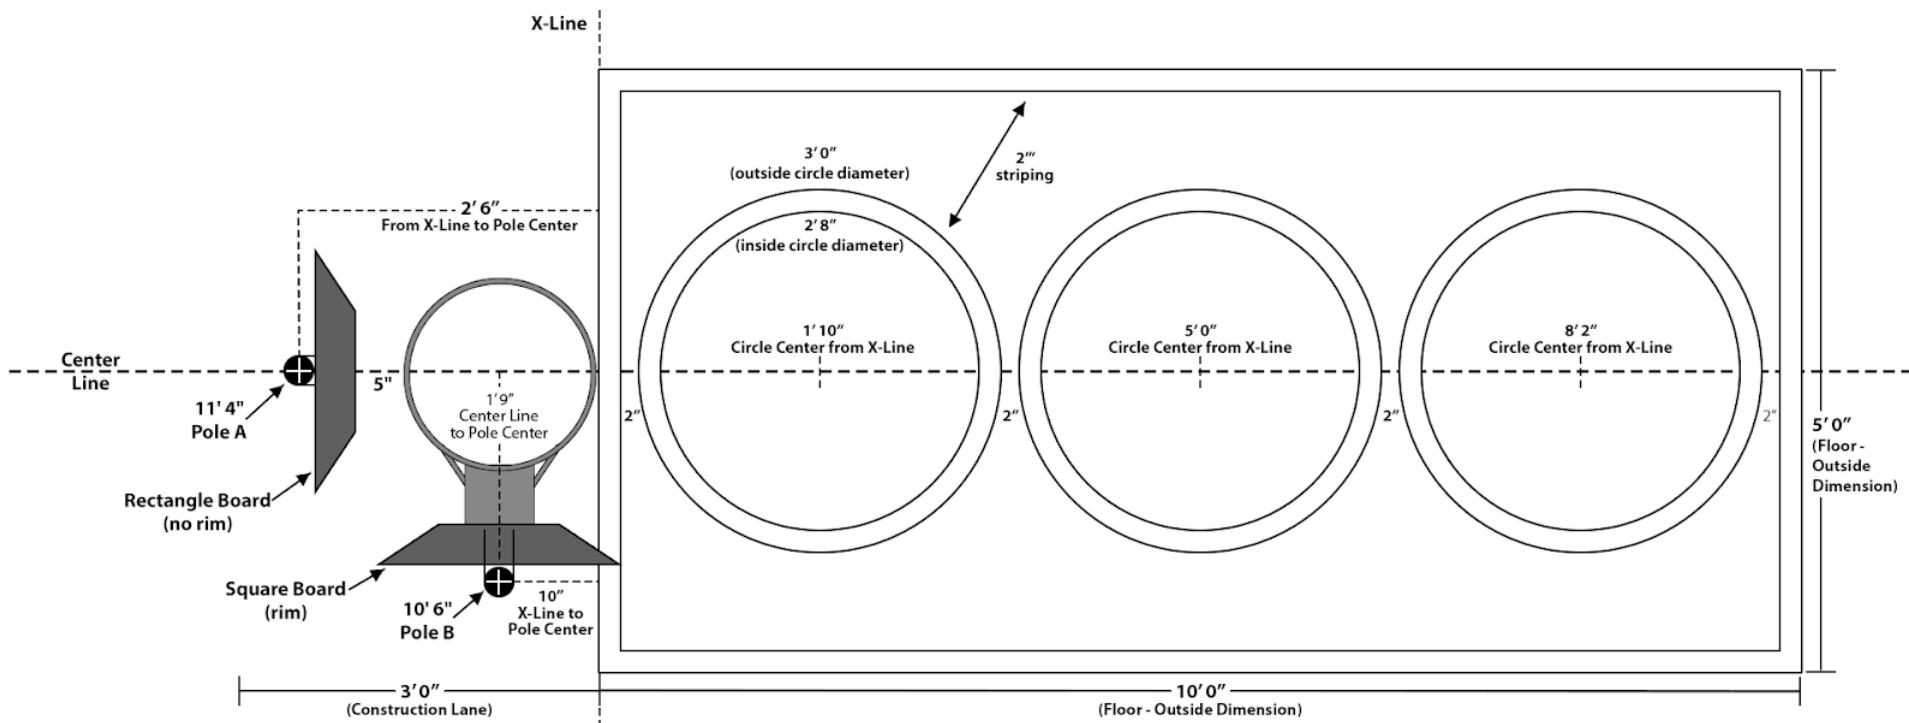


Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
2	Double Bank Down		Fan Forward	1	11' 4"	136	104	32	96"
			Square						60"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Mount Square Board on pole first, Rim should be 5 feet (60 inches) above surface.

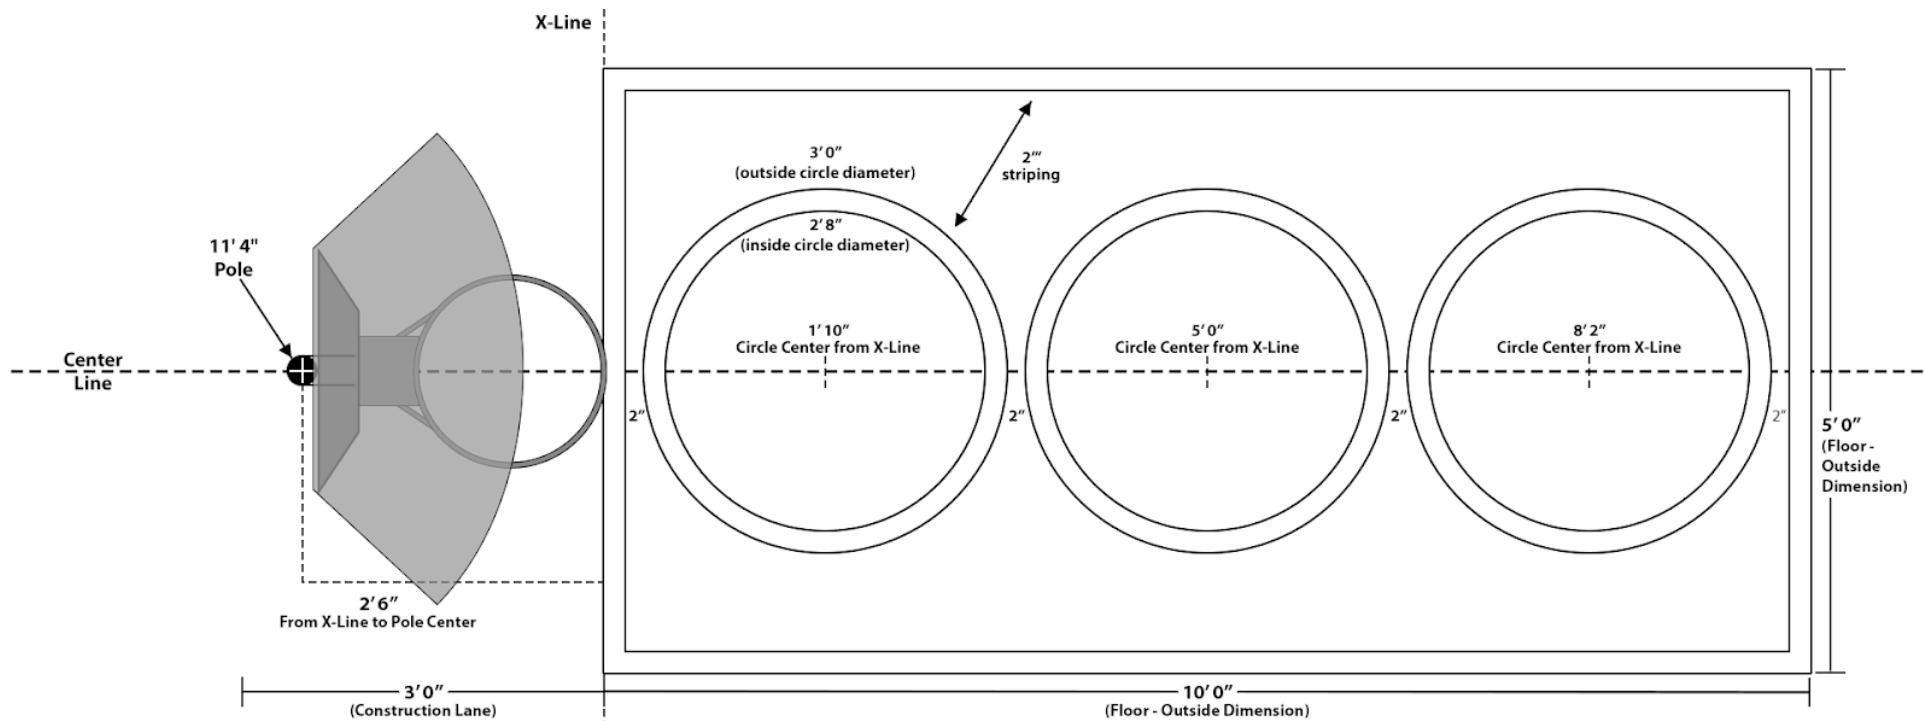


Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
3	Any		Half-Round	1	12' 8"	152	120	32	96"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

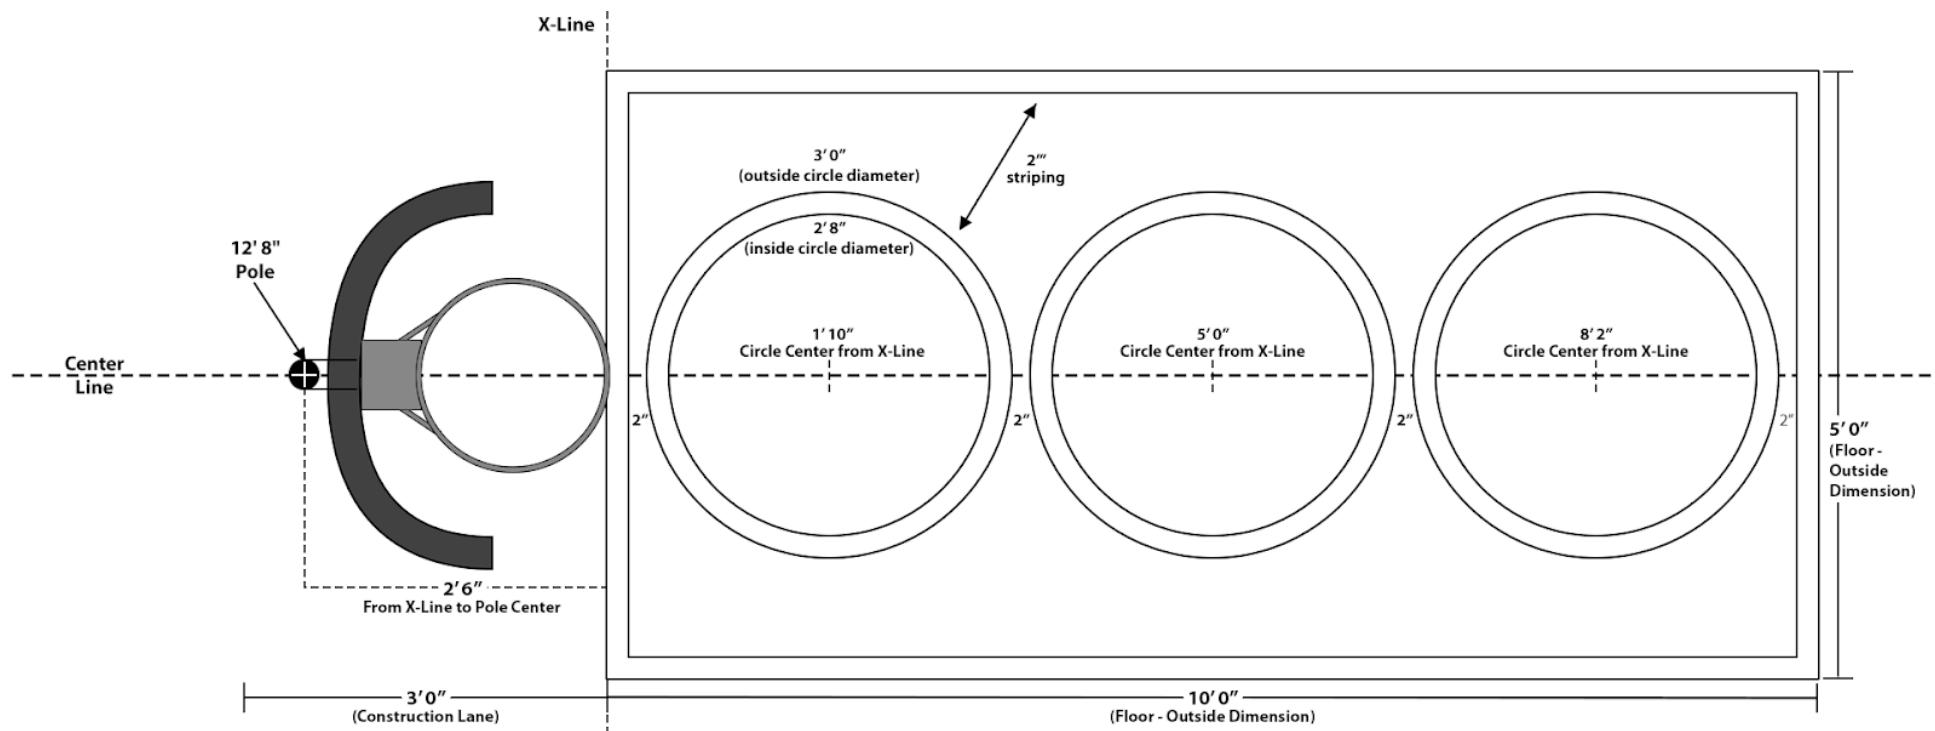



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
4	Chute		Rectangle	1	11' 4"	136	104	32	N/A
			Square	1	10' 6"	126	94	32	84"

### Installation Notes

**IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.**

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 38". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 2" gap from the face of the rectangle board to the front edge of the rim.

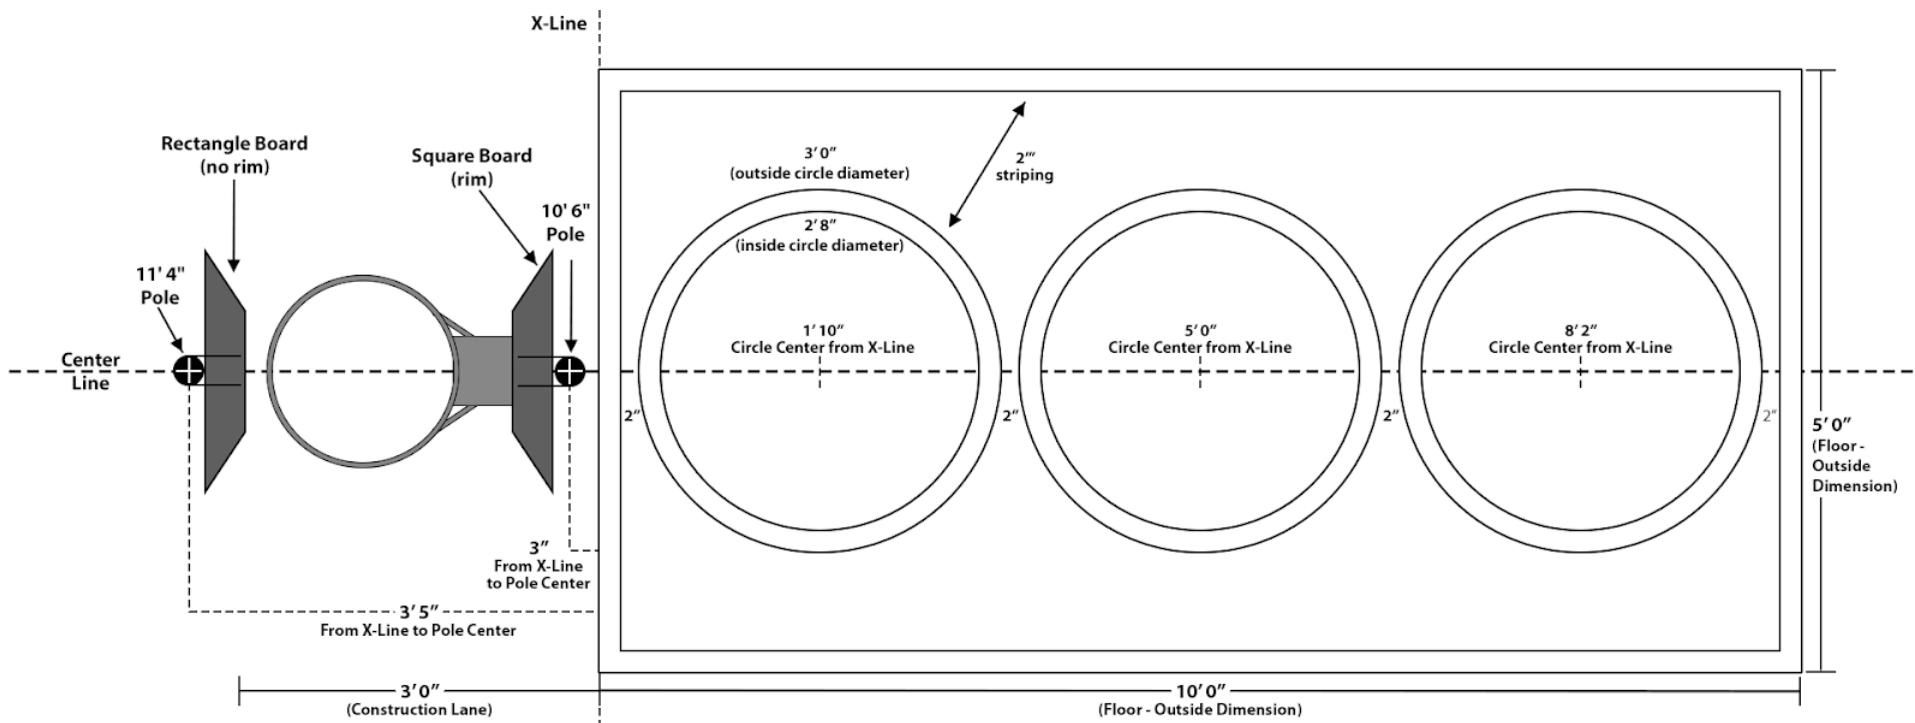

Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
5	Black Hole		Kite	1	12' 8"	152	120	32	N/A
			Kite	1	12' 8"	152	120	32	N/A
			Square	1	7' 7"	91	71	20	60"

### Installation Notes

#### IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center A to Pole Center B should be 42". Pole Center A to Pole Center C should be 61". Pole Center B to Pole Center C should be 80"
- It is recommended you install Pole A first, then measure from its center and the X-line to set Pole B

