







6 Station Playcourt - Station List

Station #	Name	Icon	Boards	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Any		1	Half-Round	1	12' 8"	152	120	32	96"
2	Either		1	3-Panel	2	12' 8"	152	120	32	96"
3	Double Bank Down		1	Fan Forward	1	11' 4"	136	104	32	96"
			1	Square Slide-Down						60"
4	Bank Back - Left		1	Rectangle	1	11' 4"	136	104	32	N/A
			1	Square	1	10' 6"	126	94	32	84"
5	Chute		1	Rectangle	1	11' 4"	136	104	32	N/A
			1	Square	1	10' 6"	126	94	32	84"
6	Black Hole		1	Kite	1	12' 8"	152	120	32	N/A
			1	Kite	1	12' 8"	152	120	32	N/A
			1	Square	1	7' 7"	91	71	20	60"

6 Station Playcourt - Parts List

<i>Board Shape(s)</i>	<i>Board Qty.</i>
3-Panel	1
Fan Forward	1
Half-Round	1
Kite	2
Rectangle	2
Square	3
Square Slide-Down	1
Grand Total	11


<i>Pole Size (Ft/in)</i>	<i>Pole Qty.</i>
10' 6"	2
11' 4"	3
12' 8"	5
7' 7"	1
Grand Total	11

2 inch round galvanized pipe, Schedule 80 (2.375 OD X 0.154 Wall)

<i>Also Included</i>	<i>Qty</i>
Rims	7
Set Screws	24
Pole Caps	11

Note: This is our standard station selection sequence for this layout.
Colors and sequence may vary, and can be tailored to your specific location and community.





Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
1	Any		Half-Round	1	12' 8"	152	120	32	96"

Installation Notes

IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.

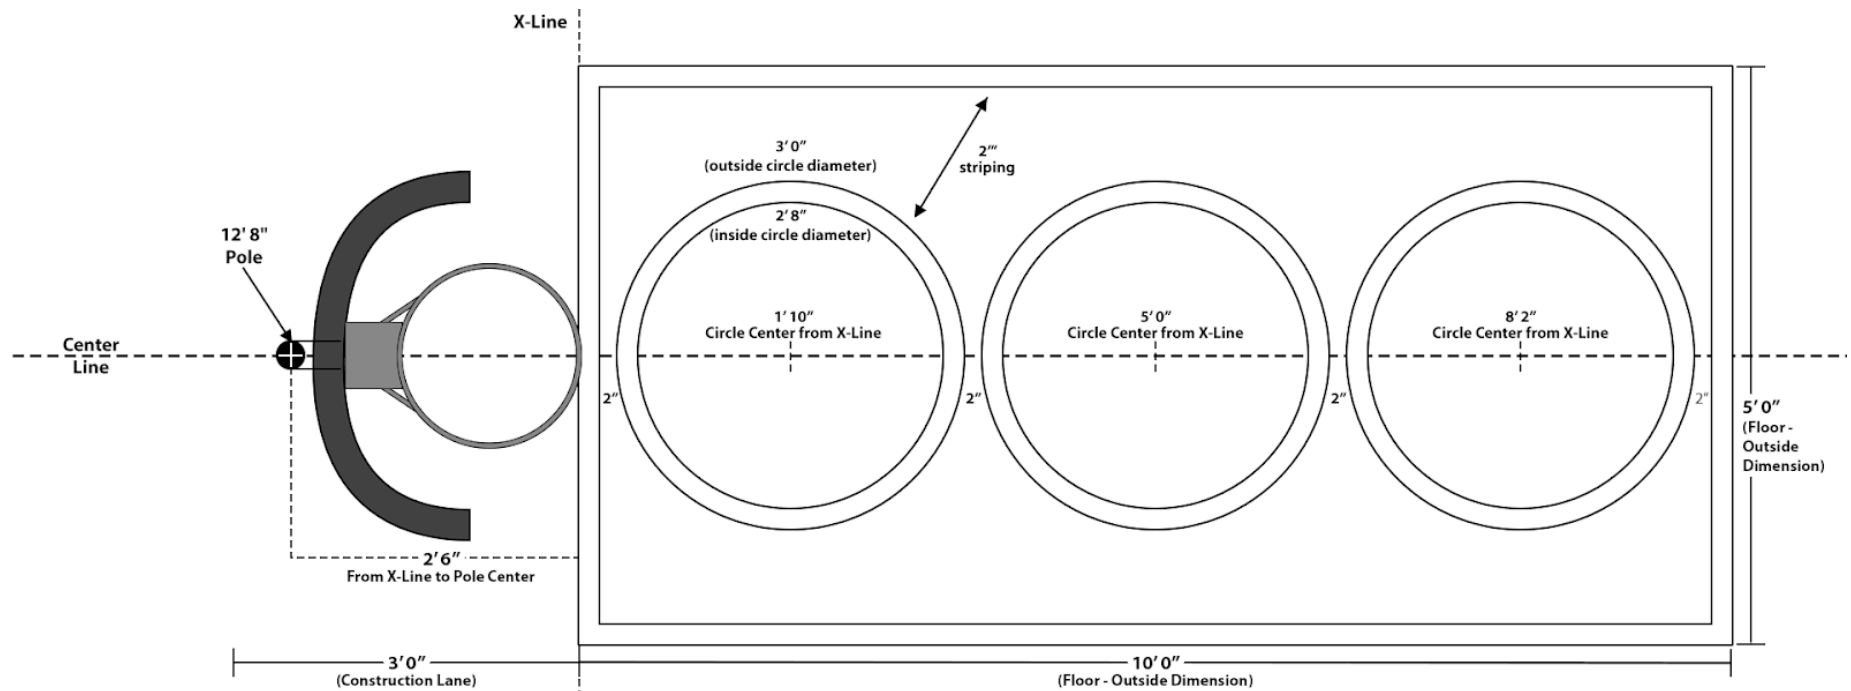



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
2	Either		3-Panel	2	12' 8"	152	120	32	96"

Installation Notes

IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 36". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

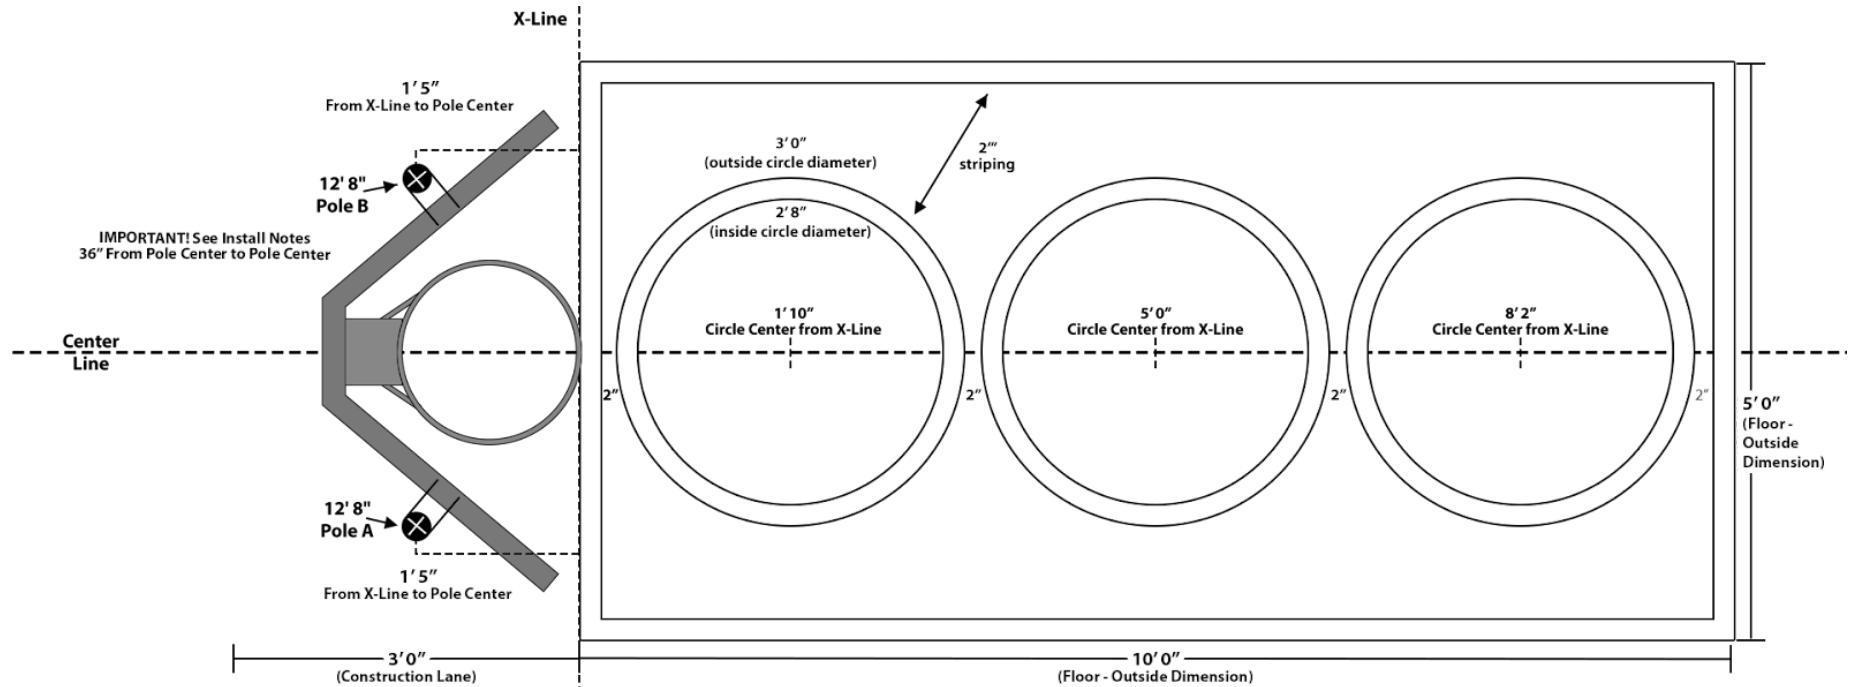



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
4	Bank Back - Left		Rectangle	1	11' 4"	136	104	32	N/A
			Square	1	10' 6"	126	94	32	84"

Installation Notes

IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 29". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 5" gap from the face of the rectangle board to the front edge of the rim.

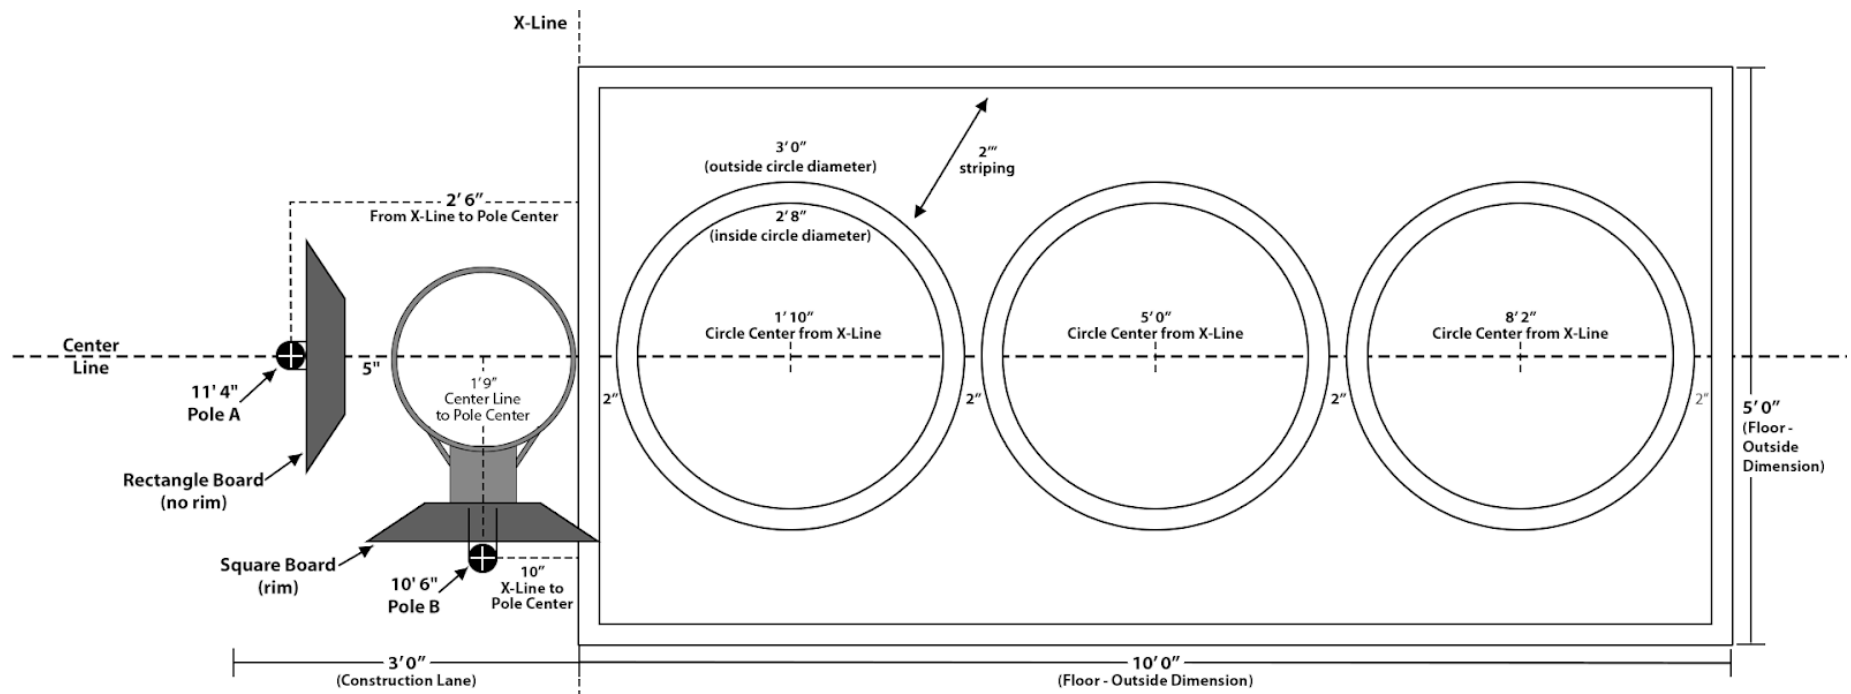



Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
5	Chute		Rectangle	1	11' 4"	136	104	32	N/A
			Square	1	10' 6"	126	94	32	84"

Installation Notes

IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center to Pole Center should be 38". It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B
- There should be roughly a 2" gap from the face of the rectangle board to the front edge of the rim.

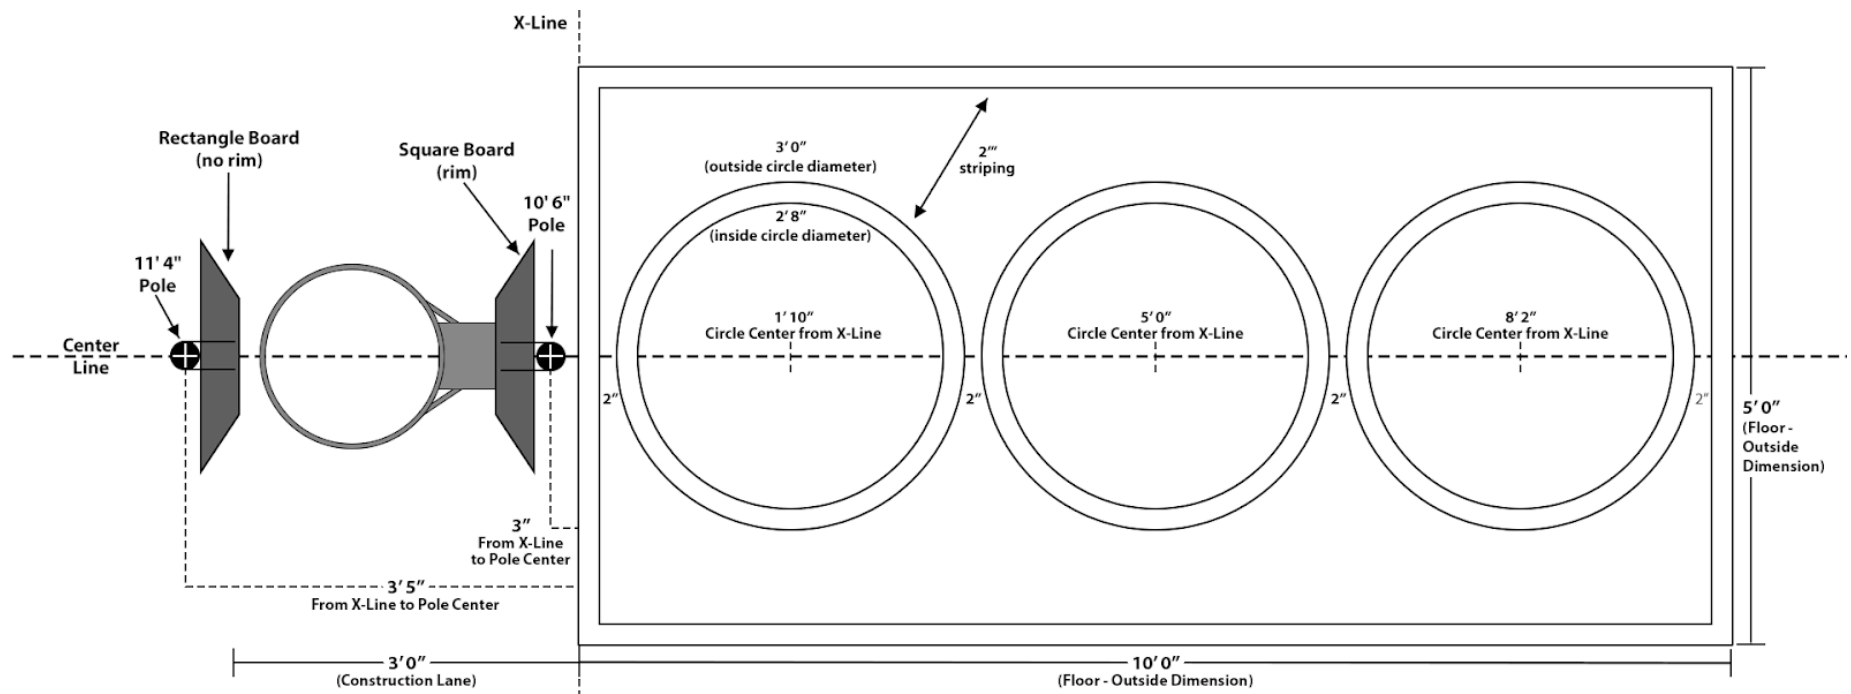

Station #	Name	Icon	Board Shape(s)	Pole Qty	Pole Size (Ft/in)	Pole Size (In.)	Inches Above Ground	Inches Below Ground	Rim Height AGL
6	Black Hole		Kite	1	12' 8"	152	120	32	N/A
			Kite	1	12' 8"	152	120	32	N/A
			Square	1	7' 7"	91	71	20	60"

Installation Notes

IMPORTANT!!! DO NOT FINALIZE POLE INSTALLATION UNTIL BOARDS ARE ON SITE.

- Variations in manufacturing can shift pole position slightly. Be sure to measure boards at job site prior to pole installation.
- Pole Center A to Pole Center B should be 42". Pole Center A to Pole Center C should be 61". Pole Center B to Pole Center C should be 80"
- It is recommend you install Pole A first, then measure from its center and the X-line to set Pole B

