



**ISO 9001:2015, AS 9100D, RohS,
CE Certified Company**

Pneumatic Riveting Tools Catalogue

S&G Paneltech & Fastening Systems

Manibhuvan, Golwadnaka, LN Road,
Vadodara (Gujarat). India-390001.

(M) - 8460616032

(E) - info@sgglobal.in

(W) - www.sgglobal.in



**N60** RIVET NUT TOOL (ADJUST FORCE)

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Vibration
3.5-12.5KN	6mm	0.6MPa	0.6-0.7MPa	2.5 m/s ²
Noise Level	Weight	Rivet nut specifications		
<70dB (A)	1.73Kg	M3-M8 (1/8"-5/16")		
(L*H*W) Size	310x202x80mm	Rivet Nut Material	(all material/Except for M8 stainless steel)	

**800/800K** RIVET NUT TOOL

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Air Consumption
>18.3KN	7mm	0.55MPa	0.5-0.7MPa	4.6 litres
Motor Speed	Vibration	Noise Level	Weight	(L*H*W) Size
2000 RPM	2.5 m/s ²	<75dB (A)	1.88Kg	290x280x103mm
Rivet Nut Material	All material	Rivet Nut Specifications	M3-M10 (1/8"-3/8")	

**N70** RIVET NUT TOOL

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Vibration
3.5-23KN	7mm	0.6MPa	0.6-0.7MPa	2.5 m/s ²
Noise Level	Weight	Rivet nut specifications		
<70dB (A)	2.2Kg	M4-M12 (1/8"-1/2")		
(L*H*W) Size	322x216x106mm	Rivet Nut Material	All material	

**N980A** RIVET NUT BOLT TOOL

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Air Consumption
>19KN	7mm	0.6MPa	0.5-0.7MPa	4.6 litres
Motor Speed	Vibration	Noise Level	Weight	(L*H*W) Size
2000 RPM	2.0 m/s ²	<75dB (A)	2.2Kg	275x250x115mm
Rivet Nut Material	All material	Rivet nut Bolt	M3-M10 (1/8"-3/8")	

**N70L** LONG STROKE RIVET NUT TOOL

(With LongStroke ,befit JackNut)

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Vibration
3.5-15KN	14mm	0.6MPa	0.6-0.7MPa	2.5 m/s ²
Noise Level	Weight	Rivet nut specifications		
<70dB (A)	2.2Kg	M4-M10 (5/32"-3/8")		
(L*H*W) Size	352x217x106mm	Rivet Nut Material	All material	

**9900s** RIVET NUT TOOL


Pull Force	Stroke	Standard Pressure	Used Air Pressure	Air Consumption
>19.1KN	7mm	0.55MPa	0.5-0.7MPa	4.6 litres
Motor Speed	Vibration	Noise Level	Weight	(L*H*W) Size
2000 RPM	2.5 m/s ²	<75dB (A)	2.2Kg	280x250x115mm
Rivet Nut Material	All material	Rivet nut specifications	M3-M12 (1/8"-1/2")	

**N80** RIVET NUT TOOL

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Vibration
20-40KN	7mm	0.6MPa	0.6-0.7MPa	2.5 m/s ²
Noise Level	Weight	Rivet nut specifications		
<70dB (A)	3.4Kg	M8-M16 (5/16"-5/8")		
(L*H*W) Size	368x237x127mm	Rivet Nut Material	All material	

**6900s** RIVET NUT TOOL

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Air Consumption
>21.2KN	7mm	0.55MPa	0.5-0.7MPa	4.6 litres
Motor Speed	Vibration	Noise Level	Weight	(L*H*W) Size
2300 RPM	2.5 m/s ²	<75dB (A)	2.1Kg	280x250x115mm
Rivet Nut Material	All material	Rivet nut specifications	M3-M16 (1/8"-5/8")	

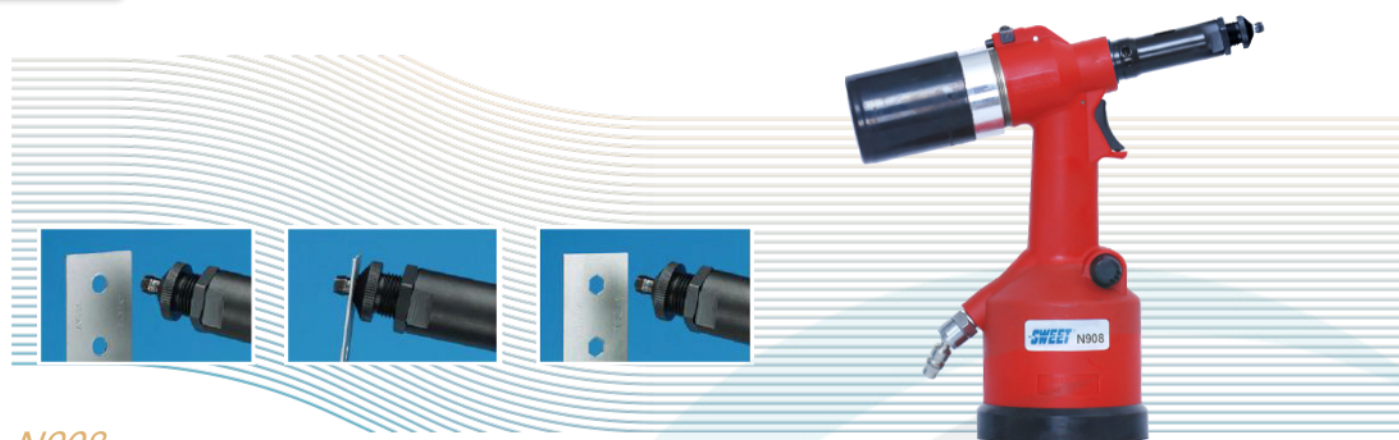

N908

Pull Force	Stroke	Standard Pressure	Used Air Pressure	Air Consumption	Motor Speed	Vibration
>23.5KN	6.5mm	0.55MPa	0.5-0.7MPa	7.5 litres	2300 RPM	2.5 m/s ²
Noise Level	<80dB (A)	Weight	2.2Kg	(L*H*W) Size	300x265x100mm	
Plate Material	(Alu)		(Steel)		(Stainless steel)	
Compatible Rivets	M4,M10 : 0.5-2.5mm M5-M8 : 0.5-4.5mm		M4 : 0.5-1.5mm M5-M10 : 0.5-3.0mm		M4-M10 : 0.5-1.5mm	



6200 HEMLOCK RIVET TOOL(Avseil)

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>18.68KN	17mm	0.6MPa	0.6-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure			
1.64Kg	276x312x134mm	Compatible Rivets	4.8mm-6.4mm (3/16"-1/4")		



6500 RIVET TOOL(long with barrel assembly)

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>14.68KN	28mm	0.55MPa	0.5-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.68Kg	326x312x134mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm, 6.4mm (1/8", 5/32", 3/16", 1/4")		



6100 RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>14.68KN	28mm	0.55MPa	0.5-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.64Kg	276x312x134mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm, 6.4mm (1/8", 5/32", 3/16", 1/4")		



7600-90° BLIND RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9KN	15mm	0.55MPa	0.5-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.62Kg	252x312x119mm	Compatible Rivets	2.4mm,3.2mm, 4.0mm (3/32", 1/8", 5/32")		



7100 RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9KN	17mm	0.55MPa	0.5-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.45Kg	276x312x119mm	Compatible Rivets	2.4mm,3.2mm, 4.0mm, 4.8mm (3/32", 1/8", 5/32", 3/16")		



7800-90° BLIND RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>14.68KN	20mm	0.55MPa	0.5-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.64Kg	276x312x134mm	Compatible Rivets	4.0mm, 4.8mm, 6.4mm (5/32", 3/16", 1/4")		

**B260/2600** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9.4KN	18mm	0.55MPa	0.5-0.7MPa	<70dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.31Kg	304x259x88mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm (1/8", 5/32", 3/16")		

**B340/B340L** RIVET TOOL

160mm-280mm					
Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>18.5KN	26mm	0.55MPa	0.5-0.7MPa	<70dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.98Kg	219x3169x107mm	Compatible Rivets	4.8mm, 6.4mm (3/16", 1/4")		

**1600** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>4.6KN	18mm	0.55MPa	0.5-0.7MPa	<70dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.05Kg	272x227x83mm	Compatible Rivets	2.4mm, 3.2mm, 4.0mm (3/32", 1/8", 5/32")		

**B160/B160L** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>4.6KN	18mm	0.55MPa	0.5-0.7MPa	<70dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.03Kg	182x227x83mm	Compatible Rivets	2.4mm, 3.2mm, 4.0mm (3/32", 1/8", 5/32")		

**2500** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9.4KN	18mm	0.55MPa	0.5-0.7MPa	<70dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.31Kg	304x259x88mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm (1/8", 5/32", 3/16")		

**B250/B250L** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9.4KN	18mm	0.55MPa	0.5-0.7MPa	<70dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.29Kg	214x259x88mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm (1/8", 5/32", 3/16")		

**3400** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>18.5KN	26mm	0.55MPa	0.5-0.7MPa	<70dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	All material		
2Kg	309x3169x107mm	Compatible Rivets	4.8mm, 6.4mm (3/16", 1/4")		

**C30** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9.5KN	18mm	0.55MPa	0.5-0.7MPa	<75dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	4.8mm Only Al,Iron,4.0mm All Material		
1.4Kg	224x289x86mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm (1/8", 5/32", 3/16")		

**C50/C50L** RIVET TOOL

Can provide 160mm-280mm extended gun head option

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>12.5KN	18mm	0.55MPa	0.5-0.7MPa	<75dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.6Kg	224x289x110mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm (1/8", 5/32", 3/16")		

**C60/C60L** RIVET TOOL

Can provide 160mm-280mm extended gun head option

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>14KN	23mm	0.55MPa	0.5-0.7MPa	<75dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All material		
1.78Kg	224x320x110mm	Compatible Rivets	4.8mm, 6.4mm (3/16", 1/4")		

**300** RIVET TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>9.5KN	18mm	0.55MPa	0.5-0.7MPa	<75dB (A)	Y
Weigh	(L*H*W) Size	Standard Pressure	Common rivets of 4.8mm aluminum iron and all materials below 4.0mm		
1.4Kg	224x289x86mm	Compatible Rivets	3.2mm, 4.0mm, 4.8mm (1/8", 5/32", 3/16")		

**5600** LOCKBOLT TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>23KN	17mm	0.62MPa	0.6-0.8MPa	<85dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All Material Ring Groove		
2.6Kg	180x318x110mm	Compatible Rivets	4.8mm, 6.4mm (3/16", 1/4")		

**5800 (BOM)** LOCKBOLT TOOL

Pull Force	Stroke	Standard Pressure	Air Pressure	Noise Level	Vacuum
>28.5KN	21mm	0.62MPa	0.6-0.8MPa	<85dB (A)	N
Weigh	(L*H*W) Size	Standard Pressure	All material		
3.9Kg	257x389x135mm	Compatible Rivets	6.4mm Bom,8mm,10mm (5/16",3/8")		

5900**Lockbolt Pneumatic hydraulic station**

This pneumatic dydraulic station is of compact design with less weight,so it's easy to carry in the outdoor maintance o mine machines.

Weigh	Power supply	Control voltage
30KG With hydraulic oil	220VAC	24VDC
Motor power	(12000RPM)0.84KW;25A@Normal	
Gear pump	2 Class 1.15L@35MPa	
Maximum output pressure	70MPa	
Fuel tank capacity	9.8L	
Maximum oil temperature	65°C	
(L*H*W) Size	354mm×409mm×470mm	
Compatible Rivets	6.4mm-25.4mm	